AI Solutioning Agent: Business Requirements Document

Version 1.0, final for build

13 October 2026 · Mindmap Digital presales and solutioning team · Internal

Contents

1. Document control
2. Executive summary
3. Business context and problem statement
4. Scope, users and deliverable catalogue
5. Intake and routing: how the agent decides what to build
6. Shared foundation
7. W1 Exploratory intro deck
8. W2 Demo and video showcase
9. W3 Transcript-based proposal
10. W4 RFP-based proposal (RFP response)
11. W5 RFI clarification questions
12. S1 Effort and commercials
13. S2 QC engine
14. W6 Demo build
15. W7 Demo video
16. W8 Email drafts
17. House rules
18. Integrations and configuration
19. Non-functional requirements and human gates
20. Success metrics
21. Risks, assumptions and open questions
Appendix A: Requirement coverage
Appendix B: Formats, templates and pending inputs

1. Document control

This BRD defines, deliverable by deliverable, what the Mindmap Digital Solutioning Agent must do, so it can be built and tested against the way the presales team works today.

Item	Detail
Document	Business Requirements Document, v1.0 (final for build)
Owner	Mindmap Digital presales and solutioning team
Audience	Internal: leadership, presales, solution architects, the build team
Status	Final for build. Every requirement in the brief is mapped and specified; the remaining tender sub-agents (14.4) await the code upload. Three inputs still to be uploaded (B.5) slot into the places marked for them without changing any requirement; Section 21 lists the points for the team to confirm
Formats and templates	Attached in Appendix B: solution and technical architecture formats (B.1, B.2), five slide templates (B.3), the process-flow reference deck (B.4), whose slides also serve as templates (B.6). 00_READ_ME_FIRST, which travels with this BRD, explains in depth how to use the BRD and each template
Review record	Coverage checked against all 272 requirements in the brief, split clause by clause (Appendix A.1); every diagram, table and image checked against the text

How to read it: Sections 2 to 4 set the context and list the deliverables. Section 5 explains how the agent decides which deliverable to build. Section 6 covers what all workflows share. Sections 7 to 16 specify each workflow step by step. Sections 17 to 21 cover house rules, integrations and configuration, non-functional needs, metrics and open points. Appendix A.1 maps each of the 272 requirements in the brief to where this BRD covers it; A.2 lists what this BRD adds beyond the brief, for the team to keep or strike. Appendix B holds the formats and templates the agent must follow.

ID conventions

Prefix	Meaning	Example
RT1 to RT8	Routing steps (Section 5)	RT7 confirmation card
W1 to W8	Deliverable workflows; their steps are numbered within each	W4-14
S1, S2	Shared sub-workflows: effort and commercials; QC engine	S1-6
-G	A human gate inside a workflow	W4-G3
D1 to D8	QC checkers (Section 13)	D2 contradiction agent
ESC-1 to ESC-4	Escalation protocol steps (Section 13.4)	ESC-3 trust reset
HR-01 to HR-17	House rules (Section 17)	HR-01
F1 to F11	Failure modes (Section 3)	F3
N-01 to N-09	Non-functional requirements (Section 19)	N-01

Priority (Must or Should) is given for integrations (Section 18) and non-functional requirements (Section 19). Which workflows form release 1 is an open question (Section 21).

2. Executive summary

The Solutioning Agent is not one general agent; it is eight separate deliverable workflows and two shared sub-workflows, with an intake router that decides which workflow a request belongs to before any drafting starts.

Code	Workflow	What it produces
W1	Exploratory intro deck	Cold or warm approach deck: periodic table of use cases, the top 5 real pain points with their sources, 5 solutions each followed by its architecture; every slide edited from a template slide
W2	Demo and video showcase	The right existing demos and videos when a client says “show me what you have”
W3	Transcript-based proposal	Proposal from client calls: a PPT for small deals or a detailed technical document for enterprise deals, pitched complex (technical stakeholders) or simple (higher-level and business stakeholders, such as finance)

Code	Workflow	What it produces
W4	RFP-based proposal (RFP response)	Fully compliant proposal built from the RFP, call updates and RFI answers: the second proposal type beside W3, with the same contents (both architectures with named data sources, process flows, Gantt, RACI, ROI where data exists, one commercials table), placed in the buyer's format and order
W5	RFI clarification questions	A short list of unanswered, needed questions with a simple English column and a complex column, for an RFP or any other pursuit
W6	Demo build	Impressive, functional demo of 10 to 12 sub-agents built on the real domain process
W7	Demo video	AI-voiced, edited walkthrough with the build platform never visible
W8	Email draft	Outreach, follow-up and cover emails with no free demo or free POC offers
S1	Effort and commercials	Inside W3 and W4, after QC: man hours checked by QC-1 and QC-2, internal cost, indicative infrastructure cost, revenue share where it applies, recommended client price, the one client commercials table
S2	QC engine	Eight checkers (compliance, contradiction, consistency, scope and promises, visuals and tables, proofread, commercials, source check) run as a profile per deliverable (inside every workflow)

Each workflow has its own inputs, step sequence, output structure, human gates and QC profile. The router picks the workflow from what the request names, then from the documents supplied and the pursuit stage, sets the parameters that change the output (audience, deal and client size, commercial model, ROI data), and asks the consultant when the request is unclear or names two deliverables.

The value is not faster first drafts. It is fewer errors reaching a human: generic pain points, missed requirements, contradictions, invented promises, wrong man hours and leaked costs. Every check runs in a fresh context that rebuilds its understanding from the source material and must prove it read every line, word, table and image. When the contradiction agent finds a contradiction, the drafting agent must explain how it got in, its earlier output is no longer trusted, and it re-evaluates the whole document in depth before a first draft exists.

3. Business context and problem statement

Solutioning today is AI-assisted but human-policed. Proofreading is one of the most important parts of the work and takes a lot of time. There are two things to it: the checks done through AI, and the team's own proofreading. The AI checks run first to fifth. The first is a compliance check that must cover every line, word, image and table; the second is the same compliance check again so nothing is missed; the third is where the team's own proofreading always finds a contradiction, which a contradiction agent now automates; the fourth and fifth are the check for contradiction and consistency within the document itself, which is done two times (10.4; this mapping of checks three, four and five is this BRD's reading of the brief, to confirm in Section 21). RFI question sets also take a lot of time.

The recurring failure modes the team has seen are the requirements this agent must design out.

#	Failure mode	Where it shows up	Example from the team	Countered by
F1	One basic item among specific ones	W1 pain points	Four in-depth pain points (for example the founder saying AI spend is running very heavy and the models are not optimised, which an orchestrator agent can solve), then a fifth such as invoice processing with no explanation	W1-6 specificity checker, D8
F2	Use cases mapped to the industry, not the company	W1	High-level industry use cases instead of the company's own problems	W1-1 to W1-6
F3	Self-contradiction	W3, W4	SMS used for a flow, then "secure because we do not use SMS"	D2, D3, ESC protocol
F4	Invented scope or offers	W3, W4, W8	A mobile app nobody asked for; a free demo or free POC promised to every client	D4, HR-01, HR-02
F5	Checks skip tables and images	All QC	Text checked, tables and images not	Coverage rule (13.1)
F6	Same answer on re-review	QC, requirement reviews	The same input gives the same answer and the same blind spots	Fresh instances (6.3), ESC-3

#	Failure mode	Where it shows up	Example from the team	Countered by
F7	Man hours wrong on first pass	S1	Effort needs correcting	QC-1 and QC-2 (S1-3, S1-4)
F8	Costs outside the commercials table	W3, W4	Prices in the executive summary	D7, HR-04, HR-05
F9	Too many, already-answered RFI questions	W5	100 to 200 questions, many already answered, some inconsistent	W5-3 to W5-9
F10	Generic domain understanding	W6	A tender agent that only takes a tender and sends a proposal	W6-1, W6-G1
F11	Visuals not cohesive	W3, W4	Diagrams that do not match each other or the text	W3-15, W4-11, D5

F11 is derived from the instruction that all visuals must be cohesive rather than from a described incident.

4. Scope, users and deliverable catalogue

Each deliverable is defined by its trigger, its blocking inputs and its output; the router uses this catalogue to decide what to build and does not start a workflow whose blocking inputs are missing.

Deliverable catalogue

Code	Trigger in the pursuit	Blocking inputs	Useful inputs	Output	Accountable
W1	First approach to a company, cold or warm	Company name; a template slide for every slide type in the deck (B.3, B.6)	Approach type (set at RT6), website, contact names, consultant notes, earlier-contact notes for a warm approach	PowerPoint built by duplicating and editing the provided template slides	Presales consultant
W2	Client asks “show me what you have”	Topic or industry	Approved pain points from W1	Shortlist with talking points	Presales consultant
W3	Discovery call held, no RFP	Call recording or transcript (the transcript is the most important input); client name	Earlier calls, emails, client documents, FTE or KPI baselines	PPT proposal (edited template slides) or detailed technical document, by the format bands (5.4)	Presales consultant; solution architect
W4	RFP received	RFP and annexures; submission deadline	Call recordings or transcripts, published RFI answers, corrigenda, buyer templates	RFP-based proposal in the buyer’s format; where none is prescribed, a PPT proposal or detailed document by the format bands (5.4)	Bid owner
W5	Clarification questions are needed: an RFP’s clarification window is open, or a pursuit without an RFP needs answers before a proposal can be built	Everything the client has sent: in an RFP pursuit, the RFP and annexures; otherwise the client’s documents and call transcripts. The question deadline where there is one	Earlier answers, buyer question template	Question sheet plus internal tracker	Bid owner (RFP); presales consultant (other pursuits)
W6	A new demo is needed	Target process; the team’s domain input	Client documents for testing; approved pain points	Working demo, test log, run sheet	Demo builder; domain owner
W7	An edited walkthrough video is needed	Working demo	Run sheet from W6-10 (W7-1 writes one if missing); client region for the voice	Single video file	Demo builder
W8	Any outreach, follow-up or cover note	Purpose; recipient	Case File context; attachment	Email draft	Presales consultant

Code	Trigger in the pursuit	Blocking inputs	Useful inputs	Output	Accountable
S1	Called inside W3 and W4 after QC and the human proofread (W3-19, W4-22)	Proofread proposal; approved technical design	Comparable past deals; budget signals from calls; hosting option and volumes	Reviewed man hours; internal cost; indicative infrastructure cost; revenue share model where it applies; recommended price; commercials table	Solution architect, delivery lead, pricing owner
S2	Called inside every workflow	The draft and its sources	Earlier QC reports (orchestrator and fix verification only)	QC report with findings and coverage log	Owner of the calling workflow

Out of scope (this release)

- Sending emails, submitting bids or uploading to portals without a human action
- Contract negotiation and legal review
- CRM pipeline management

Users and approvers

Role	Who	Approves
Presales consultant	Runs pursuits and confirms routing	Pain points, the final deck, parameters, the W3 baseline, every word of W3 proposals, W3 release, demo picks, W5 questions outside RFPs, demo outputs (with the domain owner and demo builder), the final video (with the demo builder), emails
Bid owner	The presales consultant leading an RFP	The W4 routing and parameters (RT7), the W4 baseline, each proposed deviation (W4-10), every word of the RFP-based proposal, W4 release, W5 questions for an RFP
Solution architect	Owns architecture and technical design	Technical design; man hours (with the delivery lead)
Delivery lead	Owns delivery effort	Drafts the provisional phase plan; approves man hours; proposes the overhead percentage
Pricing owner	Leadership	Client price, AI reduction, overhead, infrastructure amount shown, revenue share
Domain owner	The team member who studied the domain	Domain process map; demo outputs
Demo builder	Builds demos and videos	Demo readiness; the final video (with the consultant)

The brief names no approvers; these roles are additions (A.2).

5. Intake and routing: how the agent decides what to build

The router (RT1 to RT8) assigns every request to exactly one deliverable workflow: first by what the request names, then by the documents supplied and the pursuit stage. Anything unclear goes to the consultant. Every outcome passes an input check, parameter setting and a confirmation card; W1 and W3 to W7 wait for confirmation before drafting, while W2 and W8 show the card and proceed. The orchestrator then runs the workflow's steps in order and holds the work at each human gate until it is approved; together they form the top layer of the architecture (Section 6).

5.1 Routing steps

#	Agent	Does	Output
RT1	Intake agent	Captures the request text, client name, attached files and any deadline mentioned	Intake record
RT2	Document classifier	Labels every file by type from its content, not its file name (5.2)	File labels with confidence
RT3	Case File lookup	Finds or creates the Pursuit Case File; reads the pursuit stage and what has already been produced	Pursuit stage, earlier deliverables

#	Agent	Does	Output
RT4	Workflow classifier	Applies the routing rules in 5.3 in order; records which rule fired and why	One workflow, with reasons
RT5	Blocking-input check	Checks the catalogue's blocking inputs for that workflow (Section 4)	Pass, or a list of what is missing
RT6	Parameter resolver	Sets the parameters that change the output (5.4), each with the evidence used	Parameter set
RT7	Confirmation card	Shows the consultant the workflow, parameters and evidence. W1, W3, W4, W5, W6 and W7 wait for confirmation. W2 and W8 proceed and show the card, because both are quick and nothing reaches a client without a human gate (added; see A.2)	Confirmed run
RT8	Launcher	Hands the workflow to the orchestrator	Running workflow

Example confirmation card: "Building W3 Transcript-based proposal for [client]. Format: detailed document (Indian enterprise client; estimated deal inside the detailed-document band). Audience: business, so a simple proposal (attendees were the CFO and the finance controller). Commercial model: standard build. ROI waterfall: included, DSO baseline stated on the call. Follow-on after release: W8 cover email (5.5). Confirm or change."

5.2 Document classifier (RT2)

Label	Signals the classifier looks for
RFP	Submission instructions, evaluation criteria, numbered requirement clauses, eligibility, deadlines, commercial bid formats
RFP annexure	Referenced by an RFP clause; technical specification, compliance matrix, price schedule, draft contract
RFI or pre-bid answers	Buyer-issued question and answer pairs, corrigenda, addenda
Call transcript	Speaker-labelled turns, timestamps
Call recording or tl;dv meeting link	Audio or video file, or a tl;dv link. Transcribed once, at intake, by the Transcription service (6.4; steps W3-1 to W3-3) for every workflow, so routing and parameters read the transcript
Client brief or requirement note	Problem statement without formal bid structure
Supporting data	Financials, process documents, sample invoices, drawings, BOQs
Earlier Mindmap output	An earlier deck, proposal or question list for this client
Domain notes	The team's notes on how the work flows in a domain: stages, decisions, branches (W6)
Demo build	A link to or export of a working demo (W7)
Run sheet	A demo path with talking points (W7)

Any file below the confidence threshold is shown to the consultant to label. A misread RFP is the most expensive error in the system, so an RFP is never labelled on weak signals.

5.3 Routing rules (RT4; applied in order, first match wins)

Rule	Condition	Workflow	Notes
1	The request names one deliverable or action: intro deck, show existing demos, proposal, RFP-based proposal (RFP response), RFI questions, demo build, demo video, email	That workflow	If the inputs point to a different workflow (for example "make a proposal" with an RFP attached), ask: W3 or W4. W2, W6, W7 and W8 start only from this rule or as an accepted follow-on (5.5)
2	Nothing named; RFP present and its clarification window open	W5, then W4	W4 starts when the buyer publishes answers or the bid owner releases it
3	Nothing named; RFP present, window closed or none	W4	Call transcripts and RFI answers become sources
4	Nothing named; call transcript or recording, no RFP	W3	A recording is transcribed first
5	Nothing named; only a company name is supplied (no transcript, RFP or client brief)	W1	Cold or warm is a parameter set at RT6

Rule	Condition	Workflow	Notes
6	Anything else: no rule matched (for example a client brief without a call), or the request names two deliverables	Ask	One question listing the plausible workflows; the rules then run again

5.4 Parameter resolution (RT6)

RT6 sets provisional values from what is available at intake. In W3 they are re-resolved once the transcript is prepared (W3-4, W3-5) and locked at W3-G1. The deal-size estimate comes from budget signals in the call or from the consultant.

Workflow	Parameter	Values	How it is resolved
W1	Approach type	Cold / warm	Consultant states it; warm if the Case File shows earlier contact. What each changes is set out in 7.2
W3	Proposal complexity (audience)	Complex for technical stakeholders / simple for higher-level and business stakeholders, such as finance / mixed	Attendee roles in the transcript and who asked which questions; consultant confirms
W3	Output format	PPT proposal / detailed technical document	From the format bands in configuration (Section 18), on the two inputs the brief names: how big the client is (smaller client or enterprise, by the configured threshold) and how big the deal is (estimated deal size against the band for the client's market). Defaults from the brief: a smaller international deal up to 25 lakhs (the brief's examples are 15 or 25 lakhs) gets just a PPT, with no detailed technical document; an Indian enterprise deal of 15 lakhs or more (15 to 20 lakhs is big for an Indian enterprise) gets a detailed document. Any other case, for example an international deal above 25 lakhs or an Indian deal below 15 lakhs, goes to the consultant at RT7 with the agent's recommendation and reason
W3, W4	Commercial model	Standard build / platform or SaaS build	From the transcript or RFP scope; consultant confirms. Platform builds add a revenue share line (S1-8)
W3, W4	ROI section	Include / exclude	Include only if FTE counts or KPI baselines (for example DSO) are stated in a source
W4	Audience profile for narrative sections	As for W3	From the evaluators and stakeholders the RFP names; bid owner confirms
W4	Response format	Buyer-mandated / else PPT proposal or detailed document	The buyer's format whenever the RFP prescribes one; otherwise the same format bands as W3
W5	Pursuit type	RFP / other pursuit	An RFP among the documents means the RFP path (the W4 Stage A agents build the provisional register); otherwise the W3 extractor and consolidator do (W3-5, W3-6)
W5	Anonymised Q&A	Yes / no	From the RFP's clarification process; yes means the company is never named in question text
W6	Domain	Industry and process	From the pursuit and the domain owner
W8	Email type	Cold outreach / follow-up / cover / submission note	From the pursuit stage and the request
W3	Understanding reviewers	2 / 3	Default 2; the consultant may set 3 at RT7
W4	Understanding reviewers	3 / 2	Default 3; the bid owner may set 2 at RT7
W1, W3, W4 (PPT)	Optional slides	W1 slides 14 and 15; proposal slides 3, 7 and 39	Proposed by the agent from the pursuit; the consultant, or the bid owner in W4, confirms at RT7
All	Output language	English by default; another language when the RFP or the consultant requires it	Set at RT6, confirmed at RT7

Audience profiles (W3; also used for W4 narrative sections)

Element	Complex proposal (technical stakeholders)	Simple proposal (higher-level and business stakeholders, such as finance)
Lead with	The business logic in depth: how it works, data flow, integration	The value they get and how it will work, in plain terms
Technical architecture	Full depth in the body	Kept, but summarised in the body; full depth in an appendix
Process flows	As-is and to-be, as detailed swimlanes with system steps	As-is and to-be, showing the user effort removed
Language	Precise technical terms, each explained once	Plain language, no unexplained terms

Mixed audience (added; see A.2): a simple-proposal body with a technical appendix.

Format and audience combine as follows. In a PPT proposal the technical architecture is a one-slide summary whatever the audience; complexity sets how much business logic the slides carry. In a detailed document, a complex proposal carries full technical depth in the body and a simple one moves it to an appendix.

5.5 Follow-on workflows across a pursuit

S1 and S2 are not chained after a workflow; they run inside it at the steps named in each workflow. When a workflow is released, the orchestrator proposes the follow-ons below; an accepted follow-on enters routing at RT5.

Situation	Follow-on
New target company	W1, then a W8 email (cold outreach, or a follow-up after earlier contact); W2 when the client asks to see existing work; W6 if no library demo fits; W7 if an edited video is needed
After a discovery call	W3, then a W8 cover email
RFP received	W5 while the clarification window is open, then a W8 note to submit the questions; W4 once answers are out; then a W8 submission note
A new source arrives mid-flight (recording, transcript, RFI answer, corrigendum)	RT3 runs an impact check (added; see A.2): which requirements, drafts or questions it changes. The affected steps re-run, the consultant or bid owner is told what changed, and a changed baseline is re-locked at W3-G1 or W4-G1
A demo video is released (W7-G1)	A W8 cover note to send the video

The decision tree below is the same logic as 5.3, drawn.

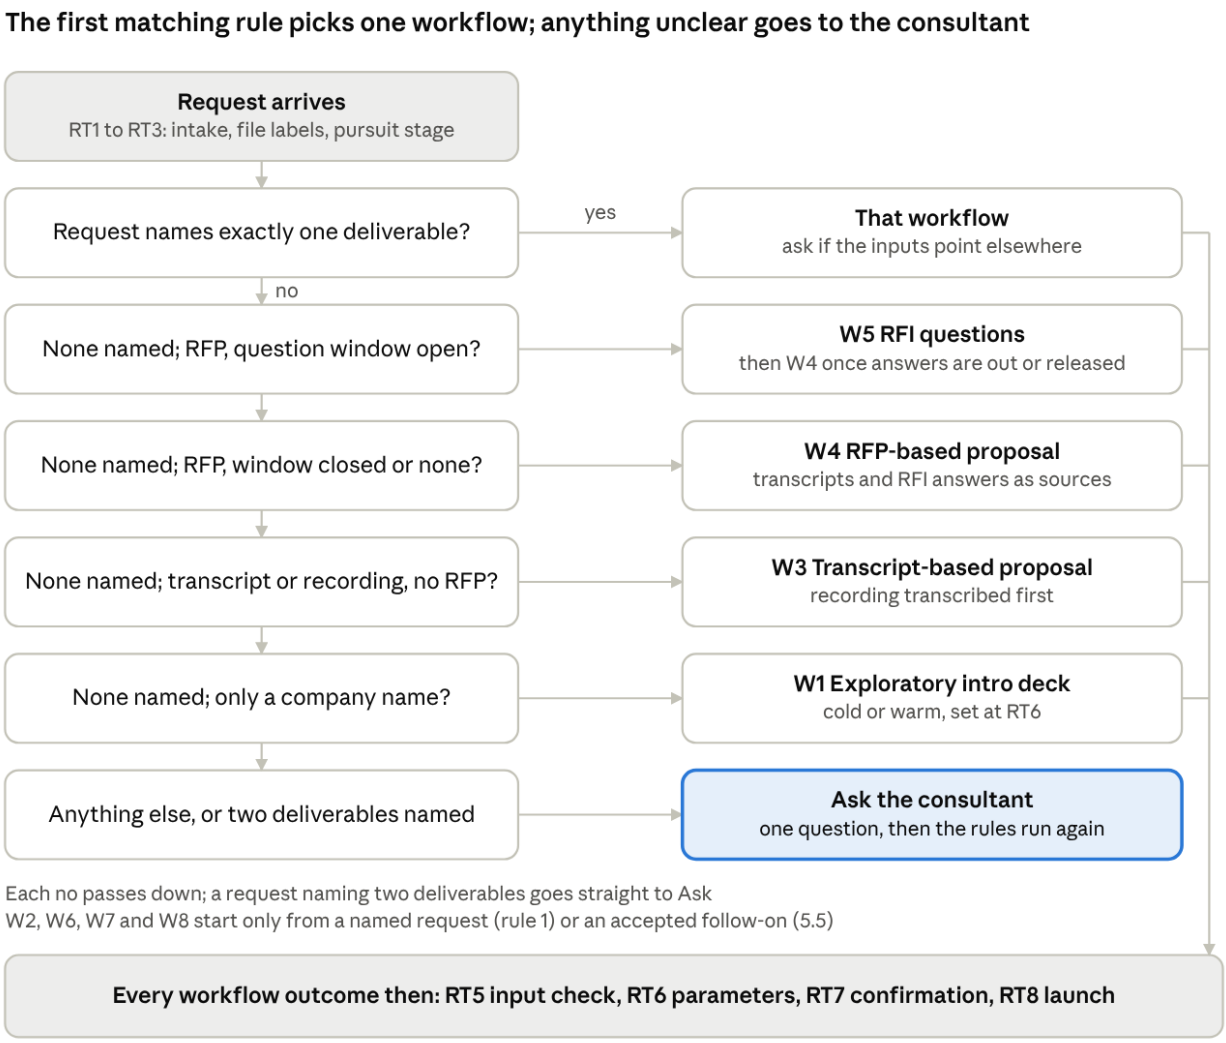


Figure: Routing decision tree, the six rules of 5.3 in order

6. Shared foundation

All workflows share one Pursuit Case File per client, a fixed set of data objects that agents pass to each other, one independent review pattern and a common set of services; nothing passes between agents as free text alone.

6.1 Pursuit Case File

One per client pursuit. It holds source documents and their labels, transcripts, research evidence, the requirement register and its locked baseline, approved pain points, every deliverable version with its parameters, QC reports, findings and how they were resolved, approvals, and the routing history. Every agent reads from it and writes to it; no agent keeps private state.

6.2 Data objects passed between agents

Object	Key fields	Produced by	Used by
Evidence record	Source type, URL or document, page or timestamp, speaker, date, exact passage, retrieval date	W1-2, transcription, document parsing	W1 pain points; W3 and W4 requirements; D8 source check
Pain point	Statement, evidence record IDs, score on each rubric factor (7.1) and total, specificity result and reason, mapped solution	W1-4 to W1-6	W1 deck, W2, W6, W8

Object	Key fields	Produced by	Used by
Requirement	ID, text, source references (document, clause, page, timestamp), class (core, supporting, mandatory compliance), what it supersedes, evaluation weight, status	W3-5 and W3-6; W4-1 to W4-4; W5-1 (provisional)	Drafting, S1, D1, D2, D4, W5
Requirement baseline	The locked set of requirements, with version and approver	W3-G1, W4-G1	D1, D2, D4 in W3 and W4; S1
Provisional register	Requirements consolidated for W5 before any baseline is locked	W5-1	W5-3 to W5-8
Claim	Subject, statement, location (section, paragraph, table cell, diagram label)	D3 (its first step)	D3 (D5 builds its own list)
Finding	Checker, severity, location, quoted text, conflicting source, proposed fix, how it got in, status	Every checker; human gates	Drafting agent, ESC protocol, consultant
Coverage log	Run ID, element IDs checked, element count of the document	Every checker	Orchestrator, which fails a run with incomplete coverage
Phase plan	Phases, durations, dependencies, milestones; marked provisional	W3-10, W4-9 (delivery lead, with agent support)	Gantt (W3-12, W4-11); reconciled with the reviewed man hours in the deep QC (W3-20, W4-23)
Work package	Description, role, estimated hours, QC-1 and QC-2 comments, reviewed hours, AI reduction and its reason (added at S1-6), assumptions	S1-1 to S1-5	S1-6; deep QC reconciliation with the Gantt
Commercial inputs	Indicative infrastructure cost with its assumptions; revenue share proposal (model, basis, rate, term)	S1-7, S1-8	S1-9, S1-G2, S1-10, D7
Question	Simple English text, complex text with document reference, decision it unblocks, sections searched, cited passage, priority, status	W5	W5 checks, consultant or bid owner
Deliverable version	Workflow, parameters, version, QC report IDs, approvals	Every workflow	Router, audit
Parameter set	Workflow, each parameter value and its source (5.4), who confirmed it at RT7 and when	RT6, RT7	Every workflow step; D1
Compliance matrix	Requirement ID, buyer clause, response location, status (complies, partial, deviation), reason, bid owner decision	W4-7, W4-10	D1, W4-G3, W4-G4
Re-evaluation note	Trigger finding, ESC-2 explanation (missed or added), sections re-checked, changes made	ESC-2, ESC-3	The next QC loop, the human gate, ESC-4
Impact-check result	New source, requirements, drafts or questions affected, baseline change proposed, re-lock decision	RT3 (5.5)	Consultant or bid owner; the affected steps
Demo shortlist and talk track	Demo or video ID, why it fits (pain point, industry), screens to show, talking points, branding and data check result	W1-10, W2-1 to W2-4	W1 deck, W2-G1
Domain process map	Stages, sequence, decision points, branches, source of each (team or research, flagged)	W6-1	W6-G1, W6-2, W6-3
Sub-agent spec	The fields in 14.2	W6-3	W6-6, W6-7, W6-8, W6-9
Test log	Test case, in or out of sample, expected output, actual output, pass or fail	W6-7, W6-8	W6-G2, W6-6
Run sheet	Demo path, data to load, talking points per screen	W6-10	W7-1, live demo
Video script and cut	Script, recorded footage, voiceover, frame check result	W7-1 to W7-5	W7-6, W7-G1, W8
Email draft	Type, recipient, purpose, sourced facts, draft text, QC report	W8-1 to W8-3	W8-G1

6.3 Independent review pattern (every checker, every workflow)

1. A reviewer starts in a fresh context with only the source documents, the reference it checks against (the locked baseline in W3 and W4 once W3-G1 or W4-G1 has locked it (before that, for the understanding reviews W3-7 and W4-5, the register or the preliminary requirement statement), the provisional register

in W5, the approved Case File items elsewhere), the draft, and its checklist. It never sees the drafter's reasoning or earlier reviews.

2. Each pass is a new reviewer instance. The number of passes per checker is set by the deliverable's QC profile (13.3). Requirement-understanding reviews (W3-7, W4-5) each use a different method, so they do not converge on the same answer: source by source (clause by clause, or call by call); the decision maker's or evaluator's view of what is really being bought; and, in W4, delivery feasibility, read as the team that must build it.
3. Each reviewer returns a coverage log of every paragraph, word, table cell, diagram, image and caption by ID. Incomplete coverage fails the pass automatically.
4. Findings are merged and de-duplicated. Disagreements between reviewers go to a human; there is no vote.
5. A fix is verified by a new reviewer instance, never the one that raised the finding.

6.4 Shared services

Service	What it is
Research	Web search and page retrieval: investor relations pages, earnings-call and investor transcripts, annual reports, press, job posts, LinkedIn posts of founders and key personnel; each source named as in Section 18 (Company research)
Transcription	Pulls the recording, and tl;dv's own transcript where one exists, by tl;dv meeting link or ID, or takes an upload from any other recorder (for example a Zoom, Microsoft Teams or Google Meet recording); converts video to MP3; converts MP3 to text with speaker labels and timestamps. Runs once at intake for every workflow that receives a recording (steps W3-1 to W3-3)
Knowledge base	Accelerator catalogue (the source of periodic table tiles), case studies, past proposals, the demo and video library, the template library (one template slide per slide type), architecture formats, the approved company profile
Visual engine	Generates every diagram in Mindmap formats from the same component and role names used in the text
House rules engine	The rules in Section 17, as checkable patterns and instructions
Config store	Rates, percentages, counts, bands, thresholds, caps and pass counts (Section 18); nothing is hardcoded

The diagram shows how the router, the workflows, S1, S2, the shared services and the named data sources sit together. Every source the agent reads is named and lands in the Case File as a cited evidence record (6.2).



Figure: Solutioning Agent architecture: router, 8 workflows, the QC engine with 8 checkers, S1, 6 shared services and the named data sources

The diagram shows the layers, not every call: workflows also call S1 and the shared services directly and read and write the Case File. The return arrow carries findings to fix and, for contradictions, the escalation protocol (13.4).

7. W1 Exploratory intro deck

W1 turns a company name into an outreach deck that shows the use cases that can be done and the top five that are really useful to them. Each of the five answers a problem the company itself has stated, with the source shown. No pain point may be basic or generic, the fifth included.

Item	Detail
Router picks it when	The request names an intro or exploratory deck (rule 1), or only a company name is supplied (rule 5)
Inputs	Company name and a template slide for every slide type in the deck (blocking; B.3, B.6); approach type, cold or warm, set at RT6; website, contact names, consultant notes (useful)
Output	PowerPoint built by duplicating and editing the provided template slides

7.1 Step-by-step flow

#	Agent	Does	Output	Rule or guard
W1-1	Research planner	Plans where to look. For every company: founders' and key personnel's LinkedIn posts and interviews, press, job posts. For a publicly listed company, also: public transcripts (earnings calls, investor calls), investor presentations, annual reports. For a warm approach, also the notes, emails and transcripts of the earlier contact in the Case File	Research plan	Names the people to cover (founders, CEO, CFO, CTO, function heads)
W1-2	Research agent	Collects passages where the company or its leaders describe problems, priorities, spend, failures and targets	Evidence records	Each record keeps URL, date, speaker and exact passage
W1-3	Evidence verifier	Re-opens every source and confirms the passage exists, is attributed correctly and is within the recency window	Verified evidence	Unverifiable evidence is dropped, never paraphrased into a claim
W1-4	Pain point extractor	Turns evidence into candidate pain points in the company's own terms	Candidate pool (more than 5)	No candidate without at least one verified evidence record
W1-5	Pain point ranker	Scores every candidate on the rubric below and picks the five biggest; fit to Mindmap only breaks ties	Top 5, with scores per factor and reasons	The count of five and the weights are configuration values (Section 18)
W1-6	Specificity checker (fresh context)	Tests all five on the same bar: stated by this company? would it read the same for any company in the industry? how strong is the evidence?	Pass or fail per item, with an explanation of why it is a real problem the company itself has listed, citing the evidence	A passing example: the founder says AI spend is running heavy and the models are not optimised, which an orchestrator agent can address. A failing example: a fifth item such as invoice processing with no evidence or explanation. A failed item is replaced from the pool; if the pool runs out, the consultant decides whether to show fewer than five (added; see A.2)
W1-G1	Consultant gate	Approves the five pain points and their sources	Approved pain points	Nothing downstream starts before this gate
W1-7	Periodic table builder	Builds the periodic table of the many use cases that can be employed at this company. Candidate tiles come from the accelerator catalogue in the knowledge base, filtered to the functions and processes the research shows this company runs; the tile count fills the periodic table template's grid (read from the template, not fixed). Tiles are grouped by function. If fewer applicable tiles remain than the grid holds, the grid is filled from applicable catalogue items for adjacent functions, never with generic tiles; if none remain, the consultant decides at W1-G2	Periodic table	A fresh-context check removes any tile that does not apply to this company's business (for example a function it does not have) and any generic AI item; each tile carries a one-line description written for this company
W1-8	Solution designer	For each pain point: the solution, how it works in three to five steps, the accelerator it uses, the value it brings. Then stars and numbers the five priority tiles on the periodic table to match slide 3, adding and starring a tile for any priority solution that is a new build with no catalogue accelerator	Five solution specs; priority tiles starred	Each spec opens by restating its pain point and source; new builds are flagged where no accelerator fits
W1-9	Solution architect agent	Draws one solution architecture per solution in the Mindmap format	Five architectures	In the solution architecture format (Appendix B.1); component names identical to the solution spec; every data source named, web sources included: the system or file the W1 research shows the company runs or, where the research does not show it, the most likely one, proposed and flagged for W1-G2; never a generic tile (HR-17, B.1)

#	Agent	Does	Output	Rule or guard
W1-10	Demo shortlister	Uses the W2 matching logic to pick one to three demos or videos for the next-steps slide	Demo shortlist	*No step-specific rule*
W1-11	Deck assembler	Builds each slide by duplicating its template slide from the template library and editing it (7.2, Appendix B.3). Never creates a new slide. If a slide type has no template in the library, the deck holds here and the consultant is asked for the template	Draft deck	Text and images change; font sizes and formatting untouched (HR-12)
W1-12	S2 QC, W1 profile	Runs the W1 checks (13.3) until two consecutive clean loops	QC report	*No step-specific rule*
W1-G2	Consultant gate	Final review	Release	*No step-specific rule*
W1-13	Follow-on	Proposes a W8 email as a follow-on (5.5): cold outreach for a cold approach, follow-up for a warm one	Follow-on proposal	The email is drafted only once the consultant accepts the follow-on; it then runs through W8 with its own QC and gate

Pain point scoring rubric (W1-5)

Factor	What scores high	Default weight
Stated impact	The company states a cost, loss, delay or risk, ideally with a number	High
Speaker seniority	Said by a founder, CEO, CFO or function head, or in an earnings call or annual report	High
Repetition	Raised in more than one source, or more than once	Medium
Recency	Inside the evidence recency window; the latest scores highest	Medium
Specificity	Names this company's own process, system or market, not an industry trend	Gate: a candidate below the bar is not ranked at all

Weights are configuration values; the team sets the numbers before go-live. One more gate applies before ranking: the pain point must be addressable by an AI solution Mindmap can deliver, as an accelerator or a new build; a candidate no AI solution addresses is not ranked. Fit to Mindmap's accelerators is used only to break ties, so a pain point is never picked because Mindmap happens to have a solution for it.

7.2 Slide specification

#	Slide	Template slide to duplicate and edit (never create a new slide)	Content
1	Title	Reference deck slide 1, title (B.6)	Company name, Mindmap Digital and the deck date
2	Use case periodic table	Periodic table template (B.3)	Tiles grouped by function, each with code, two-letter symbol, agent name and a one-line description of what it does for this company; the five priority tiles starred and numbered to match slide 3 (the number written in the tile's star text box, for example "★1"; the star removed from every other tile; the "Featured" count in the counts strip set to 5); the counts strip at the foot updated; the title, category legend and section banners rewritten for this company; no em dashes (HR-09)
3	The five real problems	Problems template (B.3)	Five columns, one per problem: number, title, why it is a real problem for them, the evidence figure or quote, and its source (who said it, where, when) in place of the industry statistic, written "Source: [speaker], [where], [date]" with no em dash (the template's dashes are removed, HR-09). The template's first column (Pain 01) has no description box: until the team adds one to 2_Problems.pptx (B.3, Section 21), problem 1's explanation goes in the quote strip, and the problem with the shortest explanation is placed in column 1; the quote strip at the foot rewritten

#	Slide	Template slide to duplicate and edit (never create a new slide)	Content
4 to 13	Solution, then its architecture, five times	Solution: agents slide template (B.3), duplicated once per solution. Architecture: reference deck slide 8, the full-visual slide (B.6), duplicated once per solution, with the architecture drawn in the B.1 format as its visual	Solution slide: headline, one-line summary, three value figures in the stat panel, six icon items (item 1, the problem and its source; items 2 to 4, how it works, with a fourth or fifth step joining item 4's text; item 5, the accelerator; item 6, the value), and a product screen in the template's product screen area (the laptop screen on the right; the .pptx holds a "UI SCREEN NEEDED" marker behind the screen image, which is replaced). The green title line at the top (which in the template runs past the slide's left edge, so the new title is fitted inside the slide) and the "Strategic Rationale" pill are rewritten for this solution, so no template text survives (D4 and D6 check). Each value figure comes from the cited evidence for that pain point or from a named Mindmap case study in the knowledge base, or is marked approximate with its basis recorded internally; D8 checks each. The screen is taken from the matching library demo (W1-10); if none exists, the consultant supplies one, and a screen is never mocked up. Architecture slide: breadcrumb title naming the solution, and the architecture in the B.1 format, laid out landscape to fit the slide's visual area with the same layers, groups, labelled connectors and legend, and every data source named (HR-17)
14	How we engage (when used)	Engagement methodology template (B.3)	Four phases with their activities and outputs for this solution; no POC content or POC timings; the phase timing labels removed (W1 has no delivery plan); the quote strip rewritten
15	Offering overview (when used)	Offerings template (B.3)	A central offering with the eight surrounding items the template holds (four components, three phases, scale and impact); no POC content or POC timings, and phase timings removed (HR-07); no template text survives, including the earlier client's programme name and figures (D4 and D6 check)
16	Next steps	Reference deck slide 40, closing (B.6)	A conversation, with the demos from W1-10 named in the call-to-action text. No free demo or free POC is offered

Every slide type in the intro deck has a template. Slides 2, 3, 4, 6, 8, 10, 12, 14 and 15 use the five templates in B.3; the title, architecture and closing slides use slides 1, 8 and 40 of the reference deck (B.6). Which template serves slides 1 and 4 to 16 is proposed for the team to confirm (Section 21). If a template is ever missing from the library, W1 holds at W1-11 and asks for it; it never creates a slide in its place.

Every slide is a duplicate of a provided template slide, edited: text and images change, font sizes and formatting stay as they are (HR-12). Use case slides carry no POC content or POC timings (HR-07) and present each use case directly, not labelled illustrative or hypothetical (HR-08). Slide content has no em dashes (HR-09). Cold and warm decks share the structure above and differ as follows (proposed; see A.2).

Element	Cold approach	Warm approach
Research (W1-1)	Public sources only	Public sources, plus the notes, emails and transcripts of the earlier contact in the Case File
Evidence for pain points	Public statements, cited with who said it, where and when	Public statements, plus what the client said in the earlier conversation, cited with the meeting and date
Slide 3 opening	The problems as the company has stated them publicly	Opens by referring to the earlier conversation
Next steps slide	Asks for a first conversation	Confirms the next step agreed in the earlier contact
Follow-on email (W8)	Cold outreach	Follow-up

7.3 QC profile for W1

W1 runs D8 (every pain point and quote traces to verified evidence), a second specificity check by a new instance, the periodic table relevance check (W1-7), D3, D4 (POC content, free demo or POC offers, commitments), D5 (architecture components match the solution slide; every data source named, HR-17) and D6 (no em dashes, tone, no illustrative labels, template formatting unchanged). Counts are in 13.3.

8. W2 Demo and video showcase

W2 answers a client who asks “show me what you have” with the one to three existing demos or videos that best fit the topic and the client’s stated problems, plus what to say while showing them.

Item	Detail
Router picks it when	The request names it (rule 1), usually after W1, or as an accepted follow-on (5.5)
Inputs	Topic or industry (blocking); approved pain points from the Case File (useful)
Output	Shortlist with reasons and talking points, with links or files; or a proposal to build a new demo in W6 when nothing fits

#	Agent	Does	Output	Rule or guard
W2-1	Library matcher	Searches the demo and video library by industry, function, process and the client’s pain points	Ranked candidates with match scores	Library entries are tagged by industry, process, sub-agents and the client each was built for
W2-2	Fit reviewer	Checks each candidate against the client: does it show the topic or problem they raised? would anything in it confuse or contradict the W1 story?	One to three picks, or none	Below the match threshold nothing is shown and W6 is proposed (added; see A.2)
W2-3	Talk track writer	Per pick: which problem it answers, which screens to show, what result to point to	Talk track	*No step-specific rule*
W2-4	Branding and data check	Confirms the build platform is not visible and no other client’s data appears in the chosen demo or video	Pass or fail	*No step-specific rule*
W2-5	S2 QC, W2 profile	D8 on every claim in the talk track; D4 for free demo or POC offers and price or timeline promises	QC report	*No step-specific rule*
W2-G1	Consultant gate	Approves the picks and the talk track	Release	*No step-specific rule*

9. W3 Transcript-based proposal

W3 turns client calls into a proposal. Four things are fixed before anything is drafted: the format (PPT or detailed technical document), the complexity (complex for technical stakeholders, simple for higher-level and business stakeholders), and whether the proposal carries an ROI section and a revenue share line. QC runs before and after the first draft, then the human proofread, then commercials (man hours checked by QC-1 and QC-2, then cost, then price), then a deep consistency QC.

Item	Detail
Router picks it when	A call transcript or recording is present and there is no RFP (rule 4), or a proposal is requested without an RFP (rule 1)
Inputs	Call recording or transcript and client name (blocking; the transcript is the most important input); earlier calls, emails, client documents, FTE and KPI baselines (useful)
Parameters (5.4)	Complexity, format, commercial model, ROI section
Output	PPT proposal (small deals) or detailed technical document (enterprise deals)

9.1 Step-by-step flow

#	Agent	Does	Output	Rule or guard
W3-1	Recording intake (Transcription service)	Pulls the recording, and tl;dv's own transcript where one exists, by tl;dv meeting link, or takes an upload. W3-1 to W3-3 run once, at intake (RT2), for every workflow that receives a recording; they are listed here because W3 depends on them most	Recording in the Case File	*No step-specific rule*
W3-2	Media converter (Transcription service)	Converts the video to MP3	Audio file	Done as a separate step today; the agent automates it
W3-3	Transcriber (Transcription service)	Converts the MP3 to a transcript with speaker labels and timestamps	Raw transcript	Also a separate step today. When tl;dv supplies a usable transcript, W3-2 and W3-3 are both skipped (added; see A.2)
W3-4	Transcript preparer	Maps speakers to attendees and their titles; segments by topic (added; see A.2)	Clean transcript	Titles feed the complexity parameter
W3-5	Requirement extractor	Pulls requirements, pain points, user roles, current process cues, volumes, FTEs, KPIs (for example DSO), constraints, budget and timeline signals, decision makers	Requirement records with timestamps	Nothing extracted without a timestamp
W3-6	Consolidator	Merges all calls, emails and documents; later statements supersede earlier ones and conflicts are flagged (added; see A.2)	Requirement register	Both statements kept and cited where they conflict
W3-7	Understanding reviewers (2 by default, 3 if the consultant sets it; fresh context)	Each rebuilds the requirement summary from the sources alone by a different method (6.3): one call by call; one as the client's decision maker deciding what they are buying; when a third runs, one for delivery feasibility, read as the team that must build it. Each then compares its summary with the register	Gaps and misreads	Differences go to the consultant
W3-G1	Consultant gate	Confirms the requirement summary and re-confirms the parameters	Locked baseline and parameters	*No step-specific rule*
W3-8	Solution designer	Designs the solution per requirement, reusing accelerators	Solution spec	Every element maps to a baseline requirement; nothing unrequested
W3-9	Architects	High-level solution architecture and technical architecture in the Mindmap formats	Architectures	Formats in Appendix B.1 and B.2. Depth set by complexity. Team standing preferences: where no source tech stack exists, the real production technology is specified; each named technology is explained; each use case is its own standalone flow (data origin, steps, technology); every data source in both architectures is named, the system or file and the data taken from it, never a generic tile (HR-17, B.1)
W3-G2	Architect gate	Approves the technical design	Approved design	*No step-specific rule*
W3-10	Provisional phase plan (delivery lead, with agent support)	Phases, durations, dependencies and milestones for the Gantt, from the approved design and comparable past projects	Provisional phase plan	Not man hours. Man hours are estimated in the commercials step (W3-19), in the order the brief gives; the deep QC (W3-20) reconciles the two

#	Agent	Does	Output	Rule or guard
W3-11	Process flow builder	As-is and to-be flows per process in the B.4 format: one swimlane per sub-process; as-is cards tagged with the user role or system that does the step; to-be cards tagged with the platform component, as in the reference deck, and with the user role that acts on or receives the step's output, so each user's value is visible; a process summary per process; a solution heat map when the solution spans several areas (B.4)	Flow diagrams	Format in Appendix B.4. As-is is usually estimated, by the method in 9.4
W3-12	Plan and governance builder	Gantt chart for the timeline from the provisional phase plan; RACI matrix in the governance section	Gantt, RACI	Roles match the delivery team; durations are reconciled with the reviewed man hours at W3-20
W3-13	ROI builder	Waterfall from today's cost to the future state, one bar per lever. Baseline bars come from client-stated FTE counts, costs and KPIs (for example DSO), each cited; FTEs become cost only with a client-stated or consultant-confirmed cost per FTE. Each lever's improvement is estimated from the approved solution design and comparable past deployments in the knowledge base, recorded internally with its basis, and shown to the client as approximate	ROI waterfall	Only if FTE or KPI baselines exist; every number cites its source or its recorded basis; shows the client's own cost levers only, never Mindmap's price, fees or a payback on them (HR-05)
W3-14	Drafting agent	Writes the proposal in the variant structure (9.2) and the audience profile (5.4): a detailed document in the Mindmap proposal template (until that template is uploaded, B.5, a detailed document holds at this step and the consultant is asked for it; the agent never invents a layout), or a PPT proposal by duplicating and editing the provided template slides	Preliminary proposal	Never creates a slide (HR-12); a slide type with no template holds the draft and the consultant is asked for one; the Word template for detailed documents is pending (B.5)
W3-15	Visual planner and cohesion pass	Incorporates the diagrams from W3-9 to W3-13; scans every section for further diagram opportunities and adds them (9.3) without dropping any content; then checks one style and one set of component and role names across every diagram and the text	Proposal with diagrams; cohesion report	*No step-specific rule*
W3-16	QC before the first draft	D1 twice; D2, then D3 twice, where any contradiction triggers the escalation protocol (13.4); then D4, D5 and D8, whose findings are fixed without escalation	First draft after two consecutive clean loops	*No step-specific rule*
W3-17	QC on the first draft	D1 2 to 3 passes (a third pass runs whenever pass 2 raises a finding); D2, then D3 twice, with any contradiction revised and the loop re-run; D4 and D5	Two consecutive clean loops	Mirrors W4 Stage E (added; see A.2)
W3-18	D6 proofread	Every word, by AI; minor findings fixed	Clean text	*No step-specific rule*
W3-G3	Human proofread	The consultant reads every word. A critical or major issue, or any issue QC did not log, triggers the escalation protocol and the work returns to W3-17	Proofread proposal	*No step-specific rule*
W3-19	S1: effort, cost, price, commercials table	Man hours estimated and checked by the QC-1 and QC-2 agents (12.1, S1-G1); then cost, indicative infrastructure cost, revenue share where it applies, recommended price and its approval (12.2, S1-G2); then the one commercials table (12.4)	Commercials section	*No step-specific rule*

#	Agent	Does	Output	Rule or guard
W3-20	Deep QC	D7, D3 and D6 on the whole document, checking the commercials section and every change since W3-G3 first: all commercial terms in place; prices only in the one commercials table, none in the executive summary or anywhere else; numbers consistent everywhere; the Gantt reconciled with the reviewed man hours (a mismatch updates the Gantt); the approved price checked against the format bands, with a band change sent to the consultant before release	QC report	Revise and re-run until clean
W3-G4	Release gate	The consultant reads the commercials section and every change since W3-G3, then releases. A critical or major issue, or any issue QC did not log: escalation protocol (13.4), back to W3-20, or to W3-17 if it lies outside the commercials	Release	A W8 cover email is proposed as a follow-on (5.5)

9.2 Output variants

Section	PPT proposal (small deals, by the format bands)	Detailed technical document (enterprise deals, by the format bands)
Executive summary	One slide, no prices	One to two pages, no prices
Understanding of the need	One slide	Full section, each point traced to the call
Solution overview	One overview slide, then one agents slide per solution (B.3)	Full section
High-level solution architecture	One slide, Mindmap format, every data source named (HR-17)	Mindmap format with explanation; every data source named (HR-17)
Technical architecture	One-slide summary	Deep: components, data contracts and schemas, model and inference choices, database schema, API endpoints, failure handling, security and access control, observability metrics; every integration and data source named (HR-17)
Process flows	As-is and to-be per process, lanes per sub-process; as-is steps tagged by user role or system, to-be steps by platform component and the user role served (B.4)	As-is and to-be per process, lanes per sub-process; as-is steps tagged by user role or system, to-be steps by platform component and the user role served (B.4), with the step descriptions
Timeline	Gantt slide	Gantt with phases, milestones and dependencies
Governance	RACI slide	RACI with governance cadence
ROI (if data exists)	Waterfall slide	Waterfall with the lever breakdown
Commercials	One table	One table
Compliance matrix (W4 only)	Reference deck slide 8 duplicates, the matrix as a native table (B.6)	A section or annex in the buyer's order
Assumptions and exclusions	One slide	Section
Engagement approach	Engagement methodology slide (B.3)	Section: phases with their activities and outputs
Title, about Mindmap and close	Reference deck slides 1, 2 and 40 (B.6)	Cover page, company section and close
Optional: leadership, agent landscape, capabilities	Reference deck slides 3, 7 and 39 (B.6), when chosen at RT7	Not used

9.3 Visual set

The client will look at diagrams more than read the text, so the proposal carries as many diagrams as possible without losing any of the content the text must carry, and all visuals are cohesive. Six visuals are always considered; the visual planner (W3-15) and the visual engine (W4-11) then add a diagram wherever a section's content takes one of the shapes in the second table.

Visual	Used when	Source of truth
High-level solution architecture	Always	Solution spec
Technical architecture	Always	Approved technical design
As-is and to-be process flows	Always, per process, lanes per sub-process; as-is steps tagged by user role or system, to-be steps by platform component and the user role served (B.4)	Requirement register, transcript, the as-is estimate (9.4)
Gantt chart	Always	Provisional phase plan (W3-10, W4-9), reconciled with the reviewed man hours
RACI matrix	Always, in governance	Delivery team model
ROI waterfall	Only with FTE or KPI baselines	Client-stated baselines; lever estimates with their recorded basis

Diagram opportunities in any section

Content in a section	Diagram added
A sequence of steps, or a hand-off between people or systems	Flow or swimlane
A comparison of options, phases, or before and after	Comparison table or side-by-side panel
Layers, modules or components and how they connect	Architecture or component view in the B.1 or B.2 format
Dates, phases or milestones	Timeline or Gantt
Numbers that add up, change over time or compare	Chart: waterfall, bar or line
Who does what	RACI or responsibility matrix
Data entities and how they relate	Data model diagram
Systems the solution connects to	Integration map, each system and feed named (HR-17)
Risks, priorities or automation potential across areas	Heat map

No content is lost to a diagram. A diagram is added beside the text, never in its place: every requirement answer, commitment and number stays in the text, and the diagram shows it. D5 checks every diagram against the text and flags any requirement answer that exists only inside a diagram.

Formats: architectures follow Appendix B.1 and B.2. Process flows follow the reference deck in Appendix B.4: per process, a "today" summary slide and a current-process swimlane, then an "on the platform" summary slide and a target-process swimlane. A PPT proposal is built by duplicating and editing the provided template slides (B.3) and the reference deck slides mapped in B.6, never by creating new slides.

9.4 Estimating the as-is process

The as-is flow is usually estimated, because the client rarely documents it. The process flow builder (W3-11), or the visual engine (W4-11) in an RFP-based proposal, estimates it in five steps.

Step	What it does
1	Takes every current-process cue from the transcripts and client documents (W3-5): steps, hand-offs, systems, volumes, time taken, people involved
2	Fills the gaps from the knowledge base: the same process at past clients, and the current-process patterns in the reference deck (B.4)

Step	What it does
3	Marks each step and figure in the internal record as stated (with its timestamp or document reference) or estimated (with its basis)
4	Shows the client the flow as the current process as understood from the discussions; estimated figures are shown as approximate, never as the client's own numbers
5	The consultant confirms the as-is flow at W3-G3; in W4 the bid owner does so at W4-G3

10. W4 RFP-based proposal (RFP response)

W4 builds the RFP-based proposal, the second proposal type beside W3's transcript-based proposal. It differs from W3 because the requirements are strict and scored. Agent 1 consolidates the RFP, call updates and RFI answers into a core preliminary requirement, and Agent 2 re-establishes that understanding from scratch two to three times before any drafting. The draft then passes the five AI checks: compliance, the same compliance check again, the contradiction agent, and the internal contradiction and consistency check run two times. A contradiction triggers the escalation protocol before a first draft exists. QC runs again on the first draft, a human proofreads every word, and commercials (man hours, cost, price) come last, followed by a deep consistency QC.

Item	Detail
Router picks it when	An RFP is present and the clarification window is closed or there is none (rule 3), after W5 once answers are out (rule 2), or on request (rule 1)
Inputs	RFP and annexures, submission deadline (blocking); call recordings or transcripts, published RFI answers, corrigenda, buyer templates (useful)
Parameters	Response format, commercial model, ROI section, audience profile for narrative sections, number of understanding reviewers at W4-5 (3 by default)
Output	Proposal in the buyer's format and order, with a compliance matrix and one commercials table; where the buyer prescribes no format, a PPT proposal or detailed document by the format bands (5.4). It carries the same contents as a W3 proposal (9.2), each mapped into the buyer's sections: executive summary, understanding of the need, solution overview, high-level solution architecture and technical architecture (both with named data sources, HR-17), as-is and to-be process flows, Gantt, RACI, ROI where data exists, commercials, assumptions and exclusions, engagement approach

10.1 Stage A: Consolidate (Agent 1)

#	Agent	Does	Output	Rule or guard
W4-1	RFP parser	Splits the RFP and annexures into clauses, including tables, forms and scoring grids	Clause set	Clause count reconciled against the RFP's own numbering; gaps shown
W4-2	Source collector	Gathers call transcripts with updates (recordings go through the Transcription service, 6.4), the buyer's answers to the questions we asked (RFI answers), corrigenda and addenda	Source set	*No step-specific rule*
W4-3	Consolidation agent	Consolidates the three together into one structured requirement register	Register	Where a later source changes a clause, both are kept, the prevailing one marked, both cited
W4-4	Core requirement analyst	Separates the core benefit the RFP is buying from supporting features, mandatory compliance and evaluation weights; writes the core preliminary requirement	Preliminary requirement statement	An RFP for a platform that does X, with AI features on top, is a platform bid: the focus is the core platform; the AI features are answered but not emphasised

10.2 Stage B: Verify the understanding (Agent 2)

#	Agent	Does	Output	Rule or guard
W4-5	Unbiased reviewers (3 by default; 2 if the bid owner sets it at RT7)	Each starts from blank, takes all the information into consideration, writes its own detailed understanding first, then compares it with the preliminary statement	Independent understanding and gap list each	Different methods (clause by clause; the evaluator's scoring view; the requirements as read by the delivery team that must build them, the method dropped when only two run) so the same input does not produce the same answer; no access to Agent 1's reasoning; each returns a coverage log of every clause, transcript and RFI answer it read (6.3 item 3)
W4-6	Reconciler	Sets the reviews side by side: agreements, disagreements, misreads, emphasis errors	Reconciliation table	No averaging; every disagreement goes to the bid owner
W4-G1	Bid owner gate	Resolves disagreements and locks the requirement baseline	Locked baseline	Every later check measures against it

10.3 Stage C: Preliminary proposal and diagrams

#	Agent	Does	Output	Rule or guard
W4-7	Response planner	Outline in the buyer's order, compliance matrix skeleton, page budget weighted to the core requirement and the scoring	Outline	Buyer section order, page limits and forms followed exactly
W4-8	Solution designer and architects	Solution, high-level solution architecture, technical architecture	Design	Same guards as W3-9: Mindmap formats, real production technology where no source stack exists, each technology explained, each use case its own standalone flow; every element maps to a baseline requirement; every data source named, as in W3-9 (HR-17, B.1)
W4-G2	Architect gate	Approves the technical design	Approved design	*No step-specific rule*
W4-9	Provisional phase plan (delivery lead, with agent support)	Phases, durations, dependencies and milestones for the Gantt	Provisional phase plan	Not man hours. Man hours come in the commercials step (W4-22), in the order the brief gives; the deep QC (W4-23) reconciles the two
W4-10	Drafting agent	Builds the preliminary proposal in the buyer's format; where none is prescribed, in the format the bands select (5.4): the Mindmap detailed document template (pending, B.5; until it is uploaded, a detailed document holds here and the bid owner is asked for it, and the agent never invents a layout), or a PPT built by duplicating and editing the provided template slides. Fills the compliance matrix (added; see A.2)	Preliminary proposal	Full compliance is the default and the target: every requirement is answered as complies wherever it can be met; where one cannot be met, the drafting agent records a proposed partial compliance or deviation with its reason; the bid owner decides it as soon as it is raised (a decision on that requirement, which does not hold the stage), and only approved ones appear, each stated once; never creates a slide (HR-12)
W4-11	Visual engine	Incorporates all diagrams: architectures, as-is and to-be flows (as-is estimated by the method in 9.4), Gantt from the provisional phase plan, RACI, ROI waterfall if data exists; then adds a diagram wherever a section's content calls for one (9.3)	Proposal with diagrams	Same rules as W3-11 to W3-13 and W3-15: as-is and to-be tagging (B.4); Gantt and RACI reconciled with the reviewed man hours at W4-23; ROI only from cited baselines, shown as approximate; same component and role names as the text; every data source named (HR-17); no content dropped

10.4 Stage D: AI proofreading before the first draft

Proofreading has two things to it: the checks done through AI, and the team's own proofreading. The brief numbers the AI checks first to fifth, and this stage runs them in that order. The first is compliance against every line, word, image and table. The second is the same compliance check again, to make sure nothing is missed. The third is the check where the team's own proofreading always finds a contradiction; the contradiction agent now does it. The fourth and fifth are the check for contradiction and consistency within the document itself, which the

brief says is done two times. The team's own proofreading stays at W4-G3, where the bid owner reads every word. Reading check three as the contradiction agent, and checks four and five as the two runs of the internal consistency check, is this BRD's interpretation of the brief; the team confirms it (Section 21).

#	Check	What it does
W4-12	Check 1: D1 compliance, pass 1	Checks every line, word, image and table for compliance with the requirements, against the RFP, transcripts, RFI answers and the baseline
W4-13	Check 2: D1 compliance, pass 2	The same compliance check by a new instance, briefed to make sure nothing is missed
W4-14	Check 3: D2 contradiction agent	Takes the requirement understanding and reads the document for any sort of contradiction, flagging each one
W4-15	Checks 4 and 5: D3 internal contradiction and consistency, run two times	Contradiction within the document itself and consistency, for example SMS used for a flow, then "secure because we do not use SMS"; each run by a new instance
W4-16	D4, D5 and D8	Unrequested scope such as a mobile app; diagrams and tables against the text; sources of claims about the client. These findings are fixed without escalation; the loop re-runs until two consecutive clean loops (13.2, 13.5)
W4-17	First draft	Reached after two consecutive clean loops of W4-12 to W4-16

Any contradiction found at W4-14 or W4-15 triggers the escalation protocol (13.4). It runs once W4-15 completes, so all contradictions from checks 3 to 5 go into one escalation. The drafting agent explains why it landed after all the checks; its output is no longer trusted; it re-evaluates everything in depth with a fresh approach. Stage D then restarts from W4-12 with new instances (the restart is an addition, A.2).

10.5 Stage E: QC of the first draft and human proofreading

#	Check	What it does
W4-18	D1 compliance, 2 to 3 passes (a third pass runs whenever pass 2 raises a finding)	New instances check that everything complies with the requirements
W4-19	D2, then D3 twice	Looks for contradictions again; any found is revised and the stage restarts at W4-18
W4-20	D4 and D5	Findings fixed without escalation; the stage repeats until two consecutive clean loops
W4-21	D6 proofread	Every word, by AI; minor findings fixed
W4-G3	Human proofread	The bid owner proofreads every word. A critical or major issue, or any issue QC did not log, is a QC escape: the escalation protocol runs and the work returns to W4-18

10.6 Stage F: Commercials, deep QC and release

#	Step	What it does
W4-22	S1: effort, cost, price, commercials table	Man hours estimated and checked by the QC-1 and QC-2 agents (12.1, S1-G1); then cost, indicative infrastructure cost, revenue share where it applies, recommended price and its approval (12.2, S1-G2); then the one commercials table (12.4). Where the buyer mandates a price schedule, it is filled instead
W4-23	Deep QC	D7, D3 and D6 on the whole document, checking the commercials section and every change since W4-G3 first: all commercial terms in place, prices only in the commercials table and nowhere else (including the executive summary), numbers consistent across the document, the Gantt reconciled with the reviewed man hours; where the buyer set no format, the approved price checked against the format bands, with a band change sent to the bid owner; revise and re-run until clean
W4-24	Submission check	Buyer submission instructions: forms, declarations, signatures, file naming, page limits, number of copies (added; see A.2). Any change it makes goes back through the deep QC (W4-23) for the changed parts before sign-off
W4-G4	Bid owner sign-off	Reads the commercials section and every change since W4-G3, then releases. A critical or major issue, or any issue QC did not log: escalation protocol (13.4), back to W4-23, or to W4-18 if it lies outside the commercials. A W8 submission note is proposed as a follow-on (5.5)

The diagram shows Stages D to F.

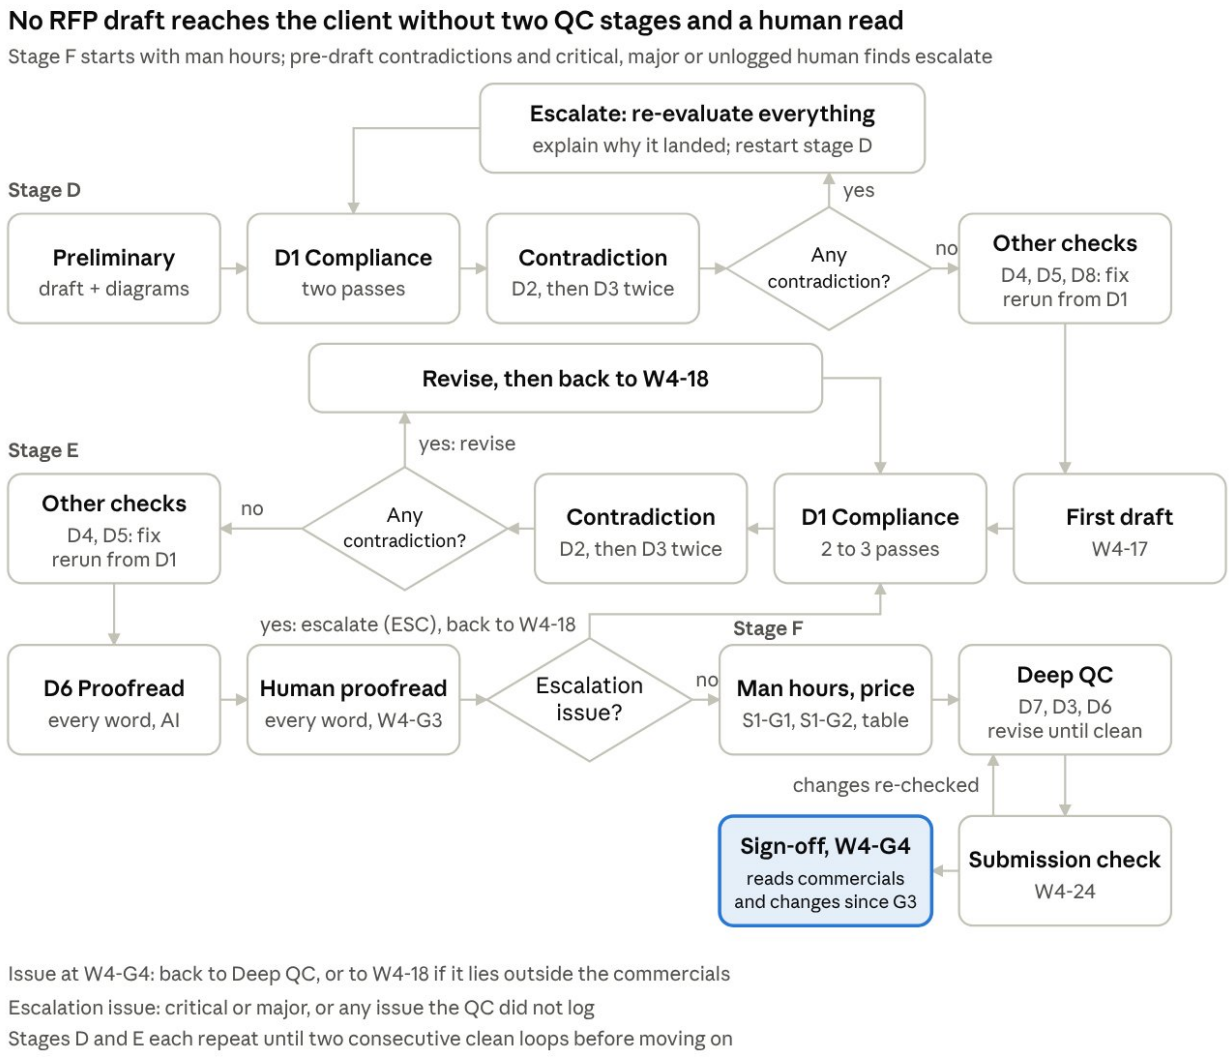


Figure: W4 stages D to F, with the human gates W4-G3, S1-G1, S1-G2 and W4-G4

11. W5 RFI clarification questions

W5 produces a short list of questions that are genuinely unanswered and genuinely needed, for an RFP or for any other pursuit where the client's documents and calls leave the solution blocked. Claude on its own tends to produce a hundred or two hundred questions, many already answered and some inconsistent; W5 is built to prevent that. Three agents run in turn: the first removes what is already answered, the second removes what is not needed, and the third simulates building the proposal to find where it really gets stuck. W5 runs before any baseline is locked, so it checks against the sources and a provisional requirement register.

Item	Detail
Router picks it when	An RFP is present and its clarification window is open (rule 2), or on request for any pursuit, with or without an RFP (rule 1)
Inputs	Everything the client has sent (blocking): in an RFP pursuit, the RFP and annexures; otherwise the client's documents and call transcripts. The question deadline where there is one; earlier answers and the buyer's question template (useful)
Parameters	Pursuit type; anonymised Q&A (yes or no); question cap from config
Output	A question sheet for the buyer or client, and an internal tracker (11.2)

11.1 Step-by-step flow

#	Agent	Does	Output	Rule or guard
W5-1	Context study	Studies the details of every document, transcript and earlier answer the client has sent; builds a provisional requirement register, using the W4 Stage A agents (W4-1 to W4-4) for an RFP, or the W3 extractor and consolidator (W3-5, W3-6) otherwise; recordings go through the Transcription service (6.4)	Indexed sources, provisional register	No question is written before this completes
W5-2	Question drafter	Drafts candidate questions from the documents	Candidate questions	Each tied to a clause or passage; no target to produce many
W5-3	Agent 1: already-answered check	For each question, searches all sources for the answer. Found: the question is dropped, citing where. Not found: the sections searched are recorded	Kept and dropped lists with evidence	*No step-specific rule*
W5-4	Agent 2: relevance check	Keeps a question only if it is really needed: its answer changes design, effort, price, compliance or risk; states which	Relevant set	*No step-specific rule*
W5-5	Agent 3: solution simulation	Simulates building the proposal (architecture, effort, plan, commercials) and records where it gets stuck; those stuck points become questions, and questions that unblock nothing are dropped (added; see A.2)	Simulation-backed set	Questions added here also pass W5-3 and W5-4
W5-6	Section verifier	Re-opens the section each question cites and confirms the problem is really there, as described	Verified set	Misattributed questions fixed or dropped
W5-7	Simplifier	Writes each question in simple English beside the complex version	Two-column set	The complex column keeps the document reference so people can trace where each question comes from
W5-8	Duplicate and contradiction check	Merges questions asking the same thing; removes questions that contradict each other or the provisional register	Clean set	The same question is never asked twice
W5-9	Ranker	Ranks by impact and trims to the configured cap (added; see A.2); questions cut by the cap are listed for the approver at W5-G1	Final set	Never exceeds the cap
W5-10	S2 QC, W5 profile	W5-3, W5-4, W5-6 and W5-8 repeated 2 to 3 times by new instances; D6 proofread; the anonymised Q&A rule (HR-11) and the build platform rule (HR-03)	QC report	*No step-specific rule*

#	Agent	Does	Output	Rule or guard
W5-11	Manual cross-check assist	For each question, shows side by side: the question, the section it cites with the passage quoted, the closest answering passage found anywhere in the sources, and the sections searched. It is briefed to prove the question unnecessary, not to confirm it	Review sheet	Pass rule: a question reaches W5-G1 only with either its cited passage quoted word for word and located, or, for a gap found by the W5-5 simulation, the stuck point described and the list of sections searched showing the information is absent; a question with neither is dropped. Fallback: if, over the first pursuits, the approver still finds already-answered or irrelevant questions above the configured rate, the consultant or bid owner switches the cross-check at W5-G1 to human-led, with the agent supplying search hits only; each escape is added to the W5-3 and W5-4 checklists (ESC-4). The pass rule is tested on two past RFPs with their RFI question sets and final responses (pending, B.5)
W5-G1	Approver gate (bid owner for an RFP; presales consultant otherwise)	Manually reviews every question: already answered? relevant? is the problem really in the cited section?	Approved list	*No step-specific rule*

11.2 Outputs

Buyer question sheet (mapped to the buyer's template when one is given)

Column	Content
Q ID	Sequential
Question (simple English)	Plain and short, one sentence where possible
Question (complex)	Full wording, with the document, section, page or clause it comes from

Internal tracker (never sent to the buyer)

Column	Content
Q ID	Same as the buyer sheet
Why we need it	The decision it unblocks: design, effort, price, compliance, risk
Searched, not answered in	Sections W5-3 checked
Priority	High / Medium / Low

Where the buyer runs an anonymised Q&A, the question text never names Mindmap Digital; it uses "we" and "our".

12. S1 Effort and commercials

S1 runs inside W3 and W4 after QC and the human proofread (W3-19, W4-22), in the order the brief describes: man hours first, checked by the QC-1 and QC-2 agents; then cost (human cost at the blended rate, less the reduction from using AI in development, plus overhead); then the price the client is likely to pay and move ahead with; then the one commercials table; then the deep QC. The Gantt is drafted earlier from a provisional phase plan (W3-10, W4-9) and reconciled with the reviewed man hours in the deep QC. The internal build-up never leaves Mindmap; the client sees one commercials table.

12.1 Part 1: Effort (W3-19, W4-22)

#	Agent	Does	Output	Rule or guard
S1-1	Work breakdown agent	Breaks the approved solution into work packages: each module and sub-agent, integrations, data work, testing, deployment, project management	Work packages	Every package maps to a baseline requirement
S1-2	Estimator	Estimates the man hours needed per package and role	Effort estimate	Assumptions recorded per package
S1-3	QC-1 agent (fresh context)	Reviews the estimate package by package: missing packages, wrong roles, hours too high or too low, weak assumptions	Findings and a corrected estimate	*No step-specific rule*
S1-4	QC-2 agent (fresh context)	Reviews the corrected estimate independently to make sure the man hours are correct	Findings	Never sees QC-1's reasoning
S1-5	Reconciler	Applies agreed changes; differences above the configured tolerance go to the solution architect and the delivery lead with reasons; compares the total effort with the provisional phase plan and flags any gap for the Gantt	Reviewed man hours	*No step-specific rule*
S1-G1	Architect and delivery lead	Approve the man hours	Locked effort	*No step-specific rule*

12.2 Part 2: Cost and price (W3-19, W4-22)

#	Agent	Does	Output	Rule or guard
S1-6	Cost calculator	Human cost = reviewed man hours × blended hourly rate. Then estimates the reduction from using AI in development, per work package: which tasks AI speeds up (for example code generation, test writing, documentation, data mapping), by how much, and why, checked by a fresh-context reviewer. Then overhead	Internal cost	All values from config; nothing hardcoded. The overhead within the 20% to 30% range is proposed by the delivery lead from the engagement's load (travel and onsite time, project management and governance, compliance and documentation, number of client stakeholders), with the reason recorded. The overhead and the AI reduction are approved at S1-G2; reduction ranges per task type come from config
S1-7	Infrastructure estimator	Estimates the indicative infrastructure cost from the approved technical architecture: hosting option (cloud, client data centre or on-premise), compute and GPU, storage, model or API usage at the expected volumes, third-party licences	Indicative infrastructure cost with its assumptions	Given most of the time; charged to the client at actuals with no Mindmap margin; the assumptions stay internal and a one-line basis appears in the table; a licence or paid data feed billed directly by its provider is shown on its own row instead (12.4)
S1-8	Revenue share modeller	Platform or SaaS builds only: proposes a revenue share from the models in config (for example a percentage of platform revenue, a fee per transaction, or a fee per active user), with the basis, the rate, the term, and any floor, cap or reduced implementation fee it trades against	Revenue share proposal	Not run for a standard build
S1-9	Price recommender	Recommends the client price from the internal cost, client size, deal size, budget signals from calls and comparable past deals, with its reasoning on what the client is likely to pay and move ahead with	Recommended price and reasoning	*No step-specific rule*
S1-G2	Pricing owner	Approves or sets the client price, the AI reduction, the overhead, whether the infrastructure line shows the indicative amount from S1-7 or reads "At actuals" (reason recorded) and, for platform builds, the revenue share (added; see A.2)	Approved price	*No step-specific rule*

#	Agent	Does	Output	Rule or guard
S1-10	Commercials table builder	Builds the single client commercials table (12.4)	Commercials section	The calling workflow then runs the deep QC (W3-20, W4-23)

Internal cost = (H × R) × (1 − a) × (1 + o)

H = reviewed man hours; R = blended hourly rate, 750 (in config; currency to confirm); a = reduction from using AI in development, the hours-weighted average of the per-package reductions estimated in S1-6 and checked by a fresh-context reviewer; o = overhead, 20% to 30%. The order follows the brief: human cost, then the AI reduction, then overhead. The client price is then set on what the client is likely to pay (S1-9), not on cost plus a fixed margin.

12.3 Standard commercial structure

Line	Rule
One-time implementation fee	Almost always (the default)
Annual maintenance (AMC)	Compulsory; 20% of the implementation fee
Revenue share	Platform or SaaS builds only, modelled by S1-8; a standard build uses the implementation fee, the compulsory AMC and infrastructure at actuals, with no revenue share
Infrastructure	Most of the time an indicative cost is given (S1-7); where the pricing owner decides at S1-G2 not to give one, the amount reads “At actuals” (HR-06). It is charged as actuals, directly to the client, not by Mindmap Digital, with no Mindmap margin

12.4 Commercials table rules and layout

- One simple table, in the commercials section only, so the client is not confused.
- No prices anywhere else: not in the executive summary, solution sections or appendices.
- No internal basis in any client output: man hours, rates, overhead, AI reduction, margin, notes on where the team is stretched.
- Mindmap’s charges and the charges billed by others are separated by two to three blank rows.
- The infrastructure line, billed by others, sits below the blank rows, highlighted (shaded) and bold, and says inside the table: “Charged as actuals. Billed directly to you, not by us (Mindmap Digital).” The infrastructure line always appears (HR-06).
- Any other charge billed to the client directly by a third party (for example a software licence or a paid data feed, each named by provider, HR-17) gets its own row under the infrastructure line, in the same shaded, bold style and with the same wording.

Item	Basis	Amount
One-time implementation fee	Fixed	[amount]
Annual maintenance (AMC)	20% of the implementation fee, per year	[amount]
Revenue share	[basis]	[share]
Infrastructure	**Charged as actuals. Billed directly to you, not by us (Mindmap Digital). [one-line basis, for example hosting option and volumes]**	**[indicative amount, or “At actuals”]**

The revenue share row appears only for platform or SaaS builds. Where no indicative amount is given, the infrastructure amount reads “At actuals”. The infrastructure row is shaded as well as bold.

Where the buyer mandates a price schedule (W4), it takes precedence; the rules above apply wherever the buyer’s format allows, and D7 checks against the buyer’s schedule. Where the buyer’s schedule requires effort or rates (for example man-days or a rate card), the pricing owner decides at S1-G2 what is shown, and D7 checks against that decision.

13. S2 QC engine

S2 is one pool of eight checkers, run as a different profile for each deliverable. A contradiction before the first draft, or a critical, major or unlogged issue a human finds at a document gate, triggers the escalation protocol, so the drafting agent re-evaluates the whole document rather than patching one line; other findings are simply fixed.

13.1 Checker catalogue

Checker	Checks	Against
D1 Compliance	Every requirement answered, in the right place, to the stated depth; reads every line, word, table and image; flags any partial or deviation answer the bid owner has not approved, for the bid owner to decide	Baseline, compliance matrix, RFP, transcripts, RFI answers; in W6, the sub-agent specs and the demo code (hardcoded values)
D2 Contradiction (the contradiction agent)	Takes the requirement understanding and reads the document for any sort of contradiction; always runs in W3 and W4, never skipped	The requirement understanding (baseline) and the sources
D3 Consistency	Contradiction within the document itself and consistency of technology choices, channels, security claims, numbers, durations, roles and names. Its first step extracts every claim into a claims ledger and flags any subject where claims conflict	The document's own claims; in W7, the script against the screens
D4 Scope and promises	Anything not agreed: a mobile app, extra integrations, SLAs, free demo or free POC offers, POC content in use case slides, price or timeline promises outside the Gantt and the commercials table, internal cost basis, the build platform's name	The baseline in W3 and W4; approved pain points and agreed scope in the Case File elsewhere; house rules
D5 Visuals and tables	Every diagram label, table cell, caption and screen against the text and the other visuals; builds its own list of claims; checks that every data source in an architecture is named and matches the text and the other architecture, web sources included (HR-17)	The text; the UI checklist in W6; recorded frames in W7
D6 Proofread	Every word: grammar, terminology, names, numbering, cross-references, style rules, tone	House rules
D7 Commercials	Commercial terms in place, price placement, table structure, AMC arithmetic, infrastructure wording, internal cost leakage	Section 12 rules; the buyer's price schedule where one is mandated
D8 Source check	Every claim about the client or about Mindmap traces to a verified evidence record or the approved company profile	Evidence records, company profile

Coverage rule. Every pass returns a coverage log of every paragraph, word, table cell, diagram, image and caption by ID. The orchestrator counts the document's elements itself and compares; incomplete coverage fails the pass (F5).

13.2 Terms

Term	Meaning
Pass	One run of one checker by one new reviewer instance
Loop	One run of the checkers listed for a step or stage (for example W3-16, or W4-12 to W4-16)
Clean loop	A loop with no critical or major findings and no contradiction of any severity from D2 or D3, before or on the first draft; other minor findings are fixed before the next human gate
Deep QC	One run of D7, D3 and D6 after pricing, repeated until a run finds nothing critical or major and no contradiction (a clean deep QC)
Stage	A named part of W4 (A to F)

13.3 QC profile per deliverable

Numbers are passes; a dash means the checker does not run. For W3, "then" separates the loop before the first draft from the loop on it; D6 runs once before the human proofread; the after-pricing entries form the deep QC, repeated until clean.

Checker	W1	W2	W3	W4 stage D	W4 stage E	W4 stage F	W5	W6	W7	W8
D1	-	-	2, then 2 to 3	2	2 to 3	-	-	1 (spec against build, hardcoded values)	-	-
D2	-	-	1, then 1	1	1	-	-	-	-	-
D3	1	-	2, then 2; plus 1 after pricing	2	2	1	-	-	1 (script against screens)	-
D4	1	1	1, then 1	1	1	-	-	1	1	1
D5	1	-	1, then 1	1	1	-	-	1 (UI checklist)	1 (frames)	-
D6	1	-	1; plus 1 after pricing	-	1	1	1	-	1 (captions)	1
D7	-	-	1 after pricing	-	-	1	-	-	-	-
D8	1	1	1	1	-	-	-	-	-	1
Workflow-specific	Periodic table relevance check (W1-7); second specificity check (W1-12)	Branding and data check (W2-4)	Visual cohesion and diagram opportunities (W3-15)	-	-	Submission check (W4-24)	W5-3, W5-4, W5-6, W5-8 repeated 2 to 3 times; HR-11; HR-03; W5-11 pass rule	Tests (W6-8); acceptance criteria (14.3)	Frame check (W7-5)	Weird-email patterns (Section 16)

13.4 Escalation protocol

Triggers: (1) any contradiction, of any severity, found by D2 or D3 before the first draft (W3-16, W4 stage D); (2) at a document gate (W3-G3, W3-G4, W4-G3, W4-G4), any critical or major issue, or any issue the QC did not log (a QC escape). Contradictions found on the first draft (W3-17, W4 stage E) or in the deep QC are revised and the loop re-run, without the trust reset, as the brief describes for that point. Other gates are ordinary approvals: a rejected item is revised or replaced without escalation.

Step	What happens
ESC-1 Log	The finding is logged with its location; a human-found issue is logged as a QC escape
ESC-2 Explain	The drafting agent must explain why this landed in the document after all the earlier checks: whether it missed something or added something
ESC-3 Trust reset	Because something got through, the earlier output is not trusted. The drafting agent re-evaluates everything in depth, from scratch: the whole document, against the requirement understanding and every source, and is told not to reuse the thought process it followed before. It is done by a new drafting instance given only the sources, the locked baseline, the findings and the ESC-2 explanation, never the earlier reasoning; it returns a re-evaluation note listing every section it re-checked and what it changed, kept in the Case File and read at the next human gate
ESC-4 Re-run and learn	The loop re-runs with new reviewer instances from its return point; the root cause is added to the relevant checklist (added; see A.2)

Finding or issue	Returns to
Contradiction before the first draft (W3-16, W4 stage D): escalation	W3-16, W4-12
Contradiction on the first draft (W3-17, W4 stage E): revised, no trust reset	W3-17, W4-18
Issue at W3-G3 or W4-G3: escalation	W3-17, W4-18
Issue at W3-G4 or W4-G4: escalation	W3-20 or W4-23 if it is in the commercials; otherwise W3-17 or W4-18

The drawn W4 flow is in Section 10.

13.5 Exit rule and severity

A loop repeats until two consecutive loops are clean (proposed rule; see A.2); the deep QC repeats until clean. No stage loops without end: if a stage reaches the configured maximum number of loops (Section 18) without meeting its exit rule, it stops, and the consultant or bid owner receives the open findings and decides whether to continue, accept with notes, or rework (added; see A.2). Then the workflow moves to its next step or human gate.

Severity	Meaning	Examples
Critical	Would lose the bid or create commercial or legal exposure	Missing mandatory requirement, unrequested commitment, price outside the table, internal rate visible
Major	Would be noticed and hurt credibility	Self-contradiction, a diagram that does not match the text, wrong client name
Minor	Polish	Grammar, capitalisation

14. W6 Demo build

A demo must impress the client, not just work. W6 starts from the team's own understanding of how the work is really done, breaks the process into 10 to 12 sub-agents each built to the depth it deserves, puts them behind a UI that looks very good, and tests them on real documents before anyone sees the demo.

Item	Detail
Router picks it when	The request names it (rule 1), or as an accepted follow-on when W2 finds no good library match (5.5)
Inputs	Target process and the team's domain input (blocking); client documents for testing, approved pain points (useful)
Output	Working demo, test log per sub-agent, run sheet (feeds a live demo or W7)

14.1 Step-by-step flow

#	Agent	Does	Output	Rule or guard
W6-1	Domain capture, with research support	The domain owner, the team member who studied the domain, records how the work really flows: sequence, decision points, branches. A research agent supports with sources and fills gaps, each flagged for review	Domain process map	The team's understanding is the primary input, because Claude alone gives a generic process that will not impress a client
W6-G1	Domain owner gate	Approves the process map before anything is built	Approved map	*No step-specific rule*
W6-2	Business problem selector	Picks the real business problems in that domain that the demo must solve	Problem list with reasons	Tied to the client's pain points where known
W6-3	Process decomposer	Breaks the process into 10 to 12 sub-agents and specifies each to the depth it deserves (14.2)	Sub-agent specs	The count range comes from config. Each spec covers its sub-flows and branching, not a single step
W6-4	Impact feature designer	Proposes features that impress this audience because they are rarely seen in applications, such as a 3D view; a feature counts only if this audience does not already see it in its own tools (the brief's exception: drawing applications already show 3D)	Feature list	*No step-specific rule*
W6-5	UI designer	Designs an interface that looks very good and passes the UI checklist (14.3)	UI design	UI checklist (14.3)
W6-6	Builder	Builds every sub-agent as functional, inside the platform	Working demo	Nothing hardcoded; values come from uploaded documents and configuration (HR-13)
W6-7	Test data preparer	Assembles in-sample and out-of-sample documents, with expected outputs for each sub-agent	Test set	Document parsing gets the widest test set

#	Agent	Does	Output	Rule or guard
W6-8	Test agent	Runs every sub-agent end to end through the browser (Playwright and Claude in Chrome) and compares outputs with expected; document parsing is tested on every document type	Test log per sub-agent	Empty, wrong or generic outputs fail; a failed sub-agent returns to W6-6 with its test log. Automated testing only serves to a certain extent
W6-9	S2 QC, W6 profile	D1 (spec against build, including a check for hardcoded values), D4 (no build platform name, no unagreed claims), D5 (UI checklist)	QC report	*No step-specific rule*
W6-G2	Output review	The domain owner, consultant and demo builder review the outputs themselves, confirm they are what they expect, and check the demo against the acceptance criteria in 14.3	Demo ready	Automated tests never replace this review
W6-10	Run sheet writer	The demo path, the data to load, talking points tied to the pain points	Run sheet	Used for a live demo or by W7

14.2 Sub-agent specification

Field	Content
Purpose	The business task it performs
Inputs	Documents or data it reads, and from which earlier sub-agent
Sub-flows	The steps inside it
Branching	User choices or data conditions that change the downstream path
Outputs	What it produces and which sub-agent uses it
Test cases	In-sample and out-of-sample inputs with expected outputs

14.3 UI checklist

A consistent design system; real data on every screen, no placeholder text; a clear flow from one sub-agent to the next; outputs shown the way the domain expects them (schedules as Gantt charts, quantities as BOQ tables, structures in 3D where used); no build platform name in the URL, footer, page title or loading screens.

Acceptance at W6-G2: impressive, not just functional

Criterion	Test
Looks very good	Passes the UI checklist above; the domain owner would show it to a senior client as it stands
Real business value	Each screen solves one of the problems from W6-2 and shows the result in the client's terms: time, cost, margin or risk
Depth	10 to 12 sub-agents, each with its sub-flows and branches working, not a single step
Something rarely seen	At least one feature the audience rarely sees in applications, such as a 3D view, where it fits the domain
Functional	Every sub-agent passes its in-sample and out-of-sample tests (W6-8)
True to the domain	The domain owner confirms the flow matches how the work is really done

14.4 Worked example: construction tender bidding agent

A tender bidding agent for a construction company is not "take a tender and send out a proposal". Documentation is a huge problem, and the biggest problem in construction is the planning itself: the plan decides the pricing and the margins, margins are very thin, so there is little room for error.

The domain sequence: soil investigation, then excavation, then dewatering or shoring, then flooring (the flooring is decided by the soil investigation), then substructure, then superstructure. Uploading a tender does not tell you how the construction will flow: the soil investigation decides the path through everything after it, which is why the scheduling sub-agent branches.

Soil branching in the scheduling sub-agent

Element	Requirement
Branch point	The soil type, selected by the user: the soil they expect, or the soil they want to calculate with
Options	The soil classes in the domain owner's process map (W6-1), not a generic list; the user can run more than one to compare
What changes downstream	The excavation method, whether dewatering or shoring is needed, the flooring decision, the substructure, and the durations, quantities and costs of each
Propagation	Each branch produces its own schedule, BOQ quantities and price, so the pricing sub-agent can show the cost and margin under each soil scenario
Sub-flows	Each stage (excavation, dewatering or shoring, flooring, substructure, superstructure) is its own sub-flow with its own inputs and outputs
View	Schedules as Gantt charts per branch, side by side; the 3D view follows the selected branch

Sub-agent	Purpose	Inputs	Sub-flows and branching	Outputs	Tests
Document compliance	Answers the documentation problem: checks the tender documents are complete and the bidder is eligible	Tender documents; company profile	List the required documents and forms; check each is present and filled; check eligibility criteria against the company profile; flag gaps	Compliance checklist with gaps and where each requirement sits in the tender	A complete tender and tenders with known gaps
Drawings	Reads the tender drawings	Drawing files (PDF or CAD exports)	Identify elements, dimensions, levels and annotations per sheet	Structured drawing data	Drawings from this tender (in-sample) and from other tenders (out-of-sample)
Drawings to specifications	Turns the drawings into specifications	Drawing data; the tender's specification text	Per element: material, grade, dimensions, finish; conflicts with the written specification flagged	Specification list	Compared with the tender's own specifications
BOQ estimation	Bill of quantities	Drawing data; specifications; the selected soil branch	Quantities per element and per stage, recomputed for each soil branch	BOQ table per branch	Against a BOQ prepared by the team; tolerance set by the domain owner
Construction scheduling	The plan, which decides pricing and margin	BOQ; specifications; soil branch	The soil branching above, with a sub-flow per stage	Schedule per branch, as a Gantt chart	Each soil branch gives the sequence the domain owner expects
Construction pricing	Prices the plan; margins are thin, so there is little room for error	BOQ and schedule per branch; rates from the uploaded rate library (never hardcoded)	Cost per stage and branch; margin and risk buffer shown per branch	Price and margin per soil scenario	Against a past priced tender; tolerance set by the domain owner
3D agent	Turns the tender into a 3D representation alongside the plan	Drawing data; schedule	Build the model; link each element to its schedule stage; follow the selected branch	3D view, stage by stage	Model dimensions match the drawings
Remaining sub-agents (to reach 10 to 12)	[INSERT: from the code review, B.5]	[INSERT: from the code review, B.5]	[INSERT: from the code review, B.5]	[INSERT: from the code review, B.5]	[INSERT: from the code review, B.5]

15. W7 Demo video

W7 turns a working demo into an AI-voiced, edited video when the requirement calls for a video instead of a live demo. The build platform (Base44) must never be visible in any frame. This BRD is internal; client-facing outputs never name the platform (HR-03).

Item	Detail
Router picks it when	The request names it (rule 1), or as an accepted follow-on (5.5)
Inputs	Working demo (blocking); run sheet from W6-10 (W7-1 writes one if it is missing); client region for the voice (useful)
Output	Single video file, not zipped (HR-14). A live demo uses the W6-10 run sheet and does not need W7

#	Agent	Does	Output	Rule or guard
W7-1	Script writer	Writes a run sheet first if W6-10 has none; then the script, scene by scene: the client problem, what the sub-agent does, the result	Script	Each scene tied to a pain point
W7-2	Recorder	Records the scripted path, driven by browser automation so takes repeat	Raw footage	*No step-specific rule*
W7-3	Voiceover	AI voiceover from the script; voice, accent and pace set per client region	Audio track	*No step-specific rule*
W7-4	Editor	Cuts, zooms on key outputs, captions, Mindmap title and end cards	Edited video	*No step-specific rule*
W7-5	Build platform frame check	Checks every frame: the platform name in the URL bar, at the bottom of the page (where it sometimes appears), in the tab title, on loading screens	Pass, or frames to crop or mask	Mandatory
W7-6	S2 QC, W7 profile	D3 (script against screens), D4, D5 (frames), D6 (captions)	QC report	*No step-specific rule*
W7-G1	Consultant gate	The consultant and the demo builder watch the final cut	Release; the video is sent with a W8 cover note as a follow-on (5.5), or the demo is shown live from the W6-10 run sheet	*No step-specific rule*

16. W8 Email drafts

Emails are mostly drafted by AI but must be proofread. AI drafts tend to read oddly and to promise a free demo or a free POC to every client. W8 never offers either, never commits to prices or timelines, and always goes to a human before sending.

Item	Detail
Router picks it when	The request names it (rule 1), or as an accepted follow-on (5.5)
Inputs	Purpose and recipient (blocking); Case File context and any attachment (useful)
Output	Email draft

Email type	Set by	Content
Cold outreach	After W1	One sourced pain point, one relevant capability, a request for a conversation
Follow-up	After a call, or after a warm-approach deck	What was discussed and the agreed next step
Deck or proposal cover	After W3 (proposal cover) or W7 (video cover note) release; a W1 deck goes with the cold outreach or follow-up above	What is attached, the two or three points that matter, the next step

Email type	Set by	Content
RFI or bid submission note	After W5 or W4	In the buyer's required form

The email-type table is an addition beyond the brief (see A.2).

#	Agent	Does	Rule or guard
W8-1	Context reader	Pulls only the facts the email may use from the Case File	Sourced facts only
W8-2	Drafter	Writes the email, short by default	Calm, measured, consultant tone; no hype (HR-10)
W8-3	S2 QC, W8 profile	D8 on every claim; D4 removes any free demo, free POC, price or timeline commitment; D6 proofreads every word and the tone; every pattern in the table below is checked	No exceptions (HR-01)
W8-G1	Consultant gate	Proofreads every word, edits and sends	Sending is always a human action

What makes an AI email read oddly, and how W8 checks it

Pattern	Example	Checked by	Source
Free demo or free POC offered	"We would be happy to set up a free demo" or "a free POC"	D4; removed, no exceptions	Brief
Tone off	Over-eager, salesy, hype words, exclamation marks	D6, against HR-10 and the configured hype-word list	Brief (tone)
Commitments not agreed	Prices, discounts, timelines, guaranteed results	D4	Added
Unverified claims	Client names, numbers or results not in the approved company profile or the Case File	D8	Added
Generic opener	Nothing about this company; could be sent to anyone	D6, against the sourced facts from W8-1	Added
Too long, or too many asks	Longer than the configured length; more than one request	D6	Added
Leftovers	Placeholders such as [Name], internal notes, a wrong company name, the build platform's name	D6 and D4	Added

17. House rules

These rules live in configuration so the team can add to them, and are checked by the checker or step named. The Source column shows whether a rule comes from the brief, from the team's standing preferences, or is an addition.

ID	Rule	Applies to	Checked by	Source
HR-01	Never offer a free demo or a free POC	W1, W2, W3, W4, W7, W8	D4	Brief
HR-02	No deliverable outside the baseline or agreed scope (for example a mobile app, extra integrations, SLAs)	W3, W4	D4	Brief (mobile app); rest added
HR-03	The build platform (Base44), its functions and integrations are never named or visible in client content	W1 to W8	D4, W2-4, W5-10, W7-5	Brief (video); team preference
HR-04	No internal cost basis in client outputs: man hours, hourly rates, overhead, AI reduction, margin, notes on where the team is stretched. Where a buyer-mandated price schedule (W4) requires effort or rates, the pricing owner decides at S1-G2 what is shown, and D7 checks against that decision	W1, W2, W3, W4, W8	D7 in W3 and W4; D4 elsewhere	Team preference

ID	Rule	Applies to	Checked by	Source
HR-05	Prices only in the one commercials table; never in the executive summary or anywhere else. In W4, where the buyer mandates a price schedule, that schedule replaces the commercials table and this rule applies wherever its format allows (12.4)	W3, W4	D7	Brief
HR-06	The infrastructure line always appears, highlighted and bold, stating that it is charged as actuals and billed directly to the client, not by Mindmap. Most of the time it carries an indicative amount; where none is given (the pricing owner decides at S1-G2, with the reason recorded), the amount reads “At actuals”. In W4, where the buyer mandates a price schedule, the infrastructure line follows that schedule wherever its format allows (12.4)	W3, W4	D7	Brief
HR-07	No POC content or POC timings in use case slides	W1; W3 and W4 when delivered as a PPT	D4	Team preference
HR-08	Use cases presented directly; never labelled illustrative, hypothetical or “not a client case”	W1; W3 and W4 when delivered as a PPT	D6	Team preference
HR-09	No em dashes in slide content	W1; W3 and W4 when delivered as a PPT	D6	Team preference
HR-10	Calm, measured, consultant tone; logic-first; no hype	W1, W3, W4, W5, W7, W8	D6	Brief (email tone); team preference
HR-11	In anonymised bidder Q&A, never name the company; “we” and “our” only	W5	W5-10	Team preference
HR-12	Never create a new slide. Every slide is a duplicate of a provided template slide (Appendix B.3 and B.6, held in the template library), edited by changing or removing text and images only; font sizes and formatting stay as they are. A slide type with no template in the library holds the deck until the consultant supplies one	W1; W3 and W4 when delivered as a PPT	W1-11, W3-14, W4-10 (template library lookup); D6 (formatting unchanged)	Brief (templates); team preference
HR-13	Nothing hardcoded: every value comes from source documents or configuration	All workflows, demos, S1, router thresholds	D1 in W6 for demo code; for S1 and the router, a design rule reviewed at S1-G1, S1-G2 and RT7	Team preference
HR-14	Files delivered individually, never zipped	All deliverables	Orchestrator	Team preference
HR-15	Decks delivered as PowerPoint files built from the provided templates	W1; W3 and W4 when delivered as a PPT	Orchestrator	Team preference; brief (templates)
HR-16	Company facts, badges and certifications (offices, client count, accelerator count, awards) only from the approved company profile; an expired badge or certification on a template slide is removed	W1, W3, W4, W8	D8	Added
HR-17	Every solution architecture names its data sources: the system or file and the data taken from it; no generic source tile (“ERP”, “Data sources”, “Enterprise systems”, “Web data”, “Price catalogue”, “News API”, “Third-party APIs”); sources from the web are named too, by provider and feed (each price catalogue, market or price feed and news API); the technical architecture uses the same names	W1, W3, W4	D5; consultant gate W1-G2; architect gates W3-G2, W4-G2	Brief (Messages 6 and 7)

New rules come mainly from QC escapes: when a human catches something, the team decides whether it becomes a standing rule (ESC-4).

18. Integrations and configuration

The agent connects to the tools named below and keeps every business value, band, threshold and rule in one configuration store. Tools the brief does not name are proposals to confirm.

Integrations

Need	Integration	Used by	Priority
Call recordings and transcripts	tl;dv: the recording and tl;dv's own transcript pulled by meeting link or ID at intake; matched to the client's Case File by the consultant at RT7 if the meeting title does not name the client; connects through the team's tl;dv account, with its key held in a secrets store; if a pull fails or the recording is still processing, the agent retries, then asks the consultant to upload the recording or transcript	Every workflow that receives a recording (at intake)	Should
Video to MP3	Media conversion inside the agent (a separate manual step today)	Every workflow that receives a recording	Must
MP3 to transcript	Speech to text with speaker labels and timestamps, used when no usable tl;dv transcript exists	Every workflow that receives a recording	Must
Company research	Claude web search and web fetch (proposed), over named sources: the company's investor relations pages; stock exchange filings and call transcripts (BSE and NSE for Indian listed companies, SEC EDGAR for US listed ones); news through a news API (NewsAPI.org proposed); job posts on the company's careers page and LinkedIn Jobs	W1, W6	Must
Leadership posts	LinkedIn content via search results or links the consultant supplies (subject to LinkedIn's terms)	W1	Should
Knowledge base	Store for the accelerator catalogue, case studies, past proposals, the template library, the demo and video library (location to confirm)	All	Must
Diagrams	Diagram tool for architectures and flows in the Mindmap formats (tool to confirm)	W1, W3, W4	Must
Decks and documents	PowerPoint editing of template slides; Word and PDF generation from Mindmap templates	W1, W3, W4	Must
Demo build and test	The build platform; Playwright and Claude in Chrome for testing	W6	Must
Voiceover and editing	AI voiceover and video editing tools (to confirm)	W7	Should
Email	Draft creation in the team's email system (to confirm)	W8	Should
Agent workspace	Where consultants make requests and see the RT7 card, gates, findings and QC reports, and approve (tool to confirm)	All	Must
Identity and roles	Single sign-on with the roles in Section 4; internal cost data restricted per N-04 (tool to confirm)	All	Must
Model and orchestration runtime	Claude models per agent and reviewer, through the Claude API (proposed), and a workflow orchestrator with resumable state (N-07); to confirm	All	Must

Configuration store

Parameter	Current value	Used by
Blended hourly rate	750 (currency to confirm)	S1-6
AMC	20% of the implementation fee	S1-10
Overhead range	20% to 30%; the value per deal proposed by the delivery lead and approved at S1-G2	S1-6
AI reduction ranges per task type	To set from the team's experience (for example code generation, test writing, documentation)	S1-6
Effort reconciliation tolerance	To set	S1-5
Revenue share models	The models the team offers, with default ranges (to set)	S1-8
Infrastructure cost inputs	Unit rates per hosting option, compute, storage and model usage (to set; refreshed from each provider's published pricing, named per provider, for example the AWS Price List API, the Azure Retail Prices API and the model vendor's API pricing page)	S1-7

Parameter	Current value	Used by
Proposal format bands	International, smaller client: up to 25 lakhs gets a PPT. Indian enterprise: 15 lakhs and above gets a detailed document. Any other case: the consultant decides at RT7. Client-size threshold (smaller client or enterprise): to set	RT6, W3-20, W4-23
Number of pain points	5	W1-5, W1-6
Pain point scoring weights	Defaults to set (7.1)	W1-5
Periodic table tile count	Read from the periodic table template's grid	W1-7
Demos or videos per pick	1 to 3	W1-10, W2-2
Sub-agents per demo	10 to 12	W6-3
Blank rows before charges billed by others	2 to 3	S1-10, D7
Man-hour QC agents	2 (QC-1, QC-2)	S1-3, S1-4
Requirement-understanding reviews	3 in W4-5 (2 if the bid owner sets it); 2 in W3-7 (3 if the consultant sets it)	W3, W4
AI proofreading checks before the first draft	5: compliance twice, the contradiction agent, the consistency check twice	W3-16, W4 stage D
Classifier confidence threshold	To set	RT2
Library match threshold	To set	W2-2
Evidence recency window	To set	W1-3
RFI question cap	To set	W5-9
RFI cross-check fallback rate	To set	W5-11
Email length and hype-word list	To set	W8-3
Passes per checker	Per the QC profile (13.3)	S2
QC exit rule	Two consecutive clean loops (proposed)	S2
House rules	Section 17	S2
RFI QC repeats	2 to 3	W5-10
Steps per solution on a solution slide	3 to 5	W1-8
Demo test tolerances (BOQ, pricing)	Set by the domain owner for each demo	W6-7, W6-8, 14.4
Maximum loops per stage	To set (5 proposed); when reached, the stage stops and a human decides (13.5)	S2, every workflow
Specificity bar	To set: the pass mark for the specificity test (7.1)	W1-5, W1-6

Data handling: client documents stay in that client's Case File, with no cross-client content in client text; evidence is stored with URL, retrieval date and passage; every draft, QC report, routing decision and approval is versioned.

19. Non-functional requirements and human gates

The agent must be traceable and safe to trust: every claim sourced, every check logged, and nothing reaching a client without a named person approving it.

ID	Area	Requirement	Priority
N-01	Traceability	Every requirement, pain point, number and claim links to its source	Must
N-02	Auditability	Versions of drafts, QC reports, findings, routing decisions and approvals kept per pursuit	Must
N-03	Independence	Checkers isolated from the drafting context (6.3)	Must
N-04	Confidentiality	Client data isolated per pursuit; internal cost and effort data visible only to the pricing owner, solution architect and delivery lead	Must

ID	Area	Requirement	Priority
N-05	Data residency	Option to run on Mindmap or client-approved infrastructure for sensitive bids (added; see A.2)	Should
N-06	Configurability	All values and house rules editable without code changes; nothing hardcoded	Must
N-07	Resumability	Long workflows resume from the last completed step	Should
N-08	Transparency	Each step shows what it did, what it used, and what it is unsure of	Must
N-09	Deadline awareness	RFP and question deadlines drive a back-planned schedule with alerts	Should

Human gates

Gate	Approver	Approves
RT7	Presales consultant (the bid owner for W4, and for W5 in an RFP pursuit)	Workflow and parameters (W1, W3, W4, W5, W6, W7 wait; W2 and W8 proceed and show the card)
W1-G1	Presales consultant	The five pain points and their sources
W1-G2	Presales consultant	Final deck
W2-G1	Presales consultant	Demo shortlist and talk track
W3-G1	Presales consultant	Requirement summary and parameters (baseline)
W3-G2	Solution architect	Technical design
W3-G3	Presales consultant	Every word of the proposal, including the as-is flows
W3-G4	Presales consultant	Release, after reading the commercials and every change since W3-G3
W4-G1	Bid owner	Locked requirement baseline
W4-G2	Solution architect	Technical design
W4-10 (deviation decision)	Bid owner	Each proposed partial compliance or deviation, with its reason; undecided items are listed at W4-G3 and block W4-G4
W4-G3	Bid owner	Every word of the RFP-based proposal, including the as-is flows
W4-G4	Bid owner	Release and submission, after reading the commercials and every change since W4-G3
W5-G1	Bid owner for an RFP; presales consultant otherwise	Every question
S1-G1	Solution architect and delivery lead	Reviewed man hours
S1-G2	Pricing owner	Client price, AI reduction, overhead, infrastructure amount shown, revenue share
W6-G1	Domain owner	Domain process map
W6-G2	Domain owner, consultant, demo builder	Demo outputs, readiness and the acceptance criteria (14.3)
W7-G1	Presales consultant and demo builder	Final video
W8-G1	Presales consultant	Email; sending is a human action

20. Success metrics

Success is measured by how much less the team catches by hand, not by how fast drafts appear. Zero-tolerance metrics carry fixed targets now; the rest get targets once baselines are measured on the next three to five pursuits.

Metric	Definition	Target
Unrequested commitments	Free demo, free POC, mobile app or similar in any released output	Zero
Cost leaks	Prices outside the one commercials table, or any internal cost basis (man hours, rates, overhead, AI reduction, margin) anywhere in a client output	Zero

Metric	Definition	Target
Requirement coverage	Share of baseline requirements answered as complies (the compliance matrix in W4; the baseline mapping in W3); approved deviations are reported separately, per bid, with their reasons	100%
Contradictions at the human proofread	Contradictions of any severity, and any critical issue, found at W3-G3 or W4-G3	Zero
QC escapes per document	Issues of any severity found by humans after S2	Baseline first
Routing accuracy	Share of requests not corrected at RT7	Baseline first
Effort accuracy	Reviewed estimate against actual delivery effort	Tolerance to set
Pain point acceptance	Share of the W1 top five accepted at W1-G1 without replacement	Baseline first
RFI question yield	Share of submitted questions not already answered in the sources	Baseline first
Turnaround	RFP receipt to W4-G4 sign-off	Baseline first
Senior review time	Hours of senior proofreading per document	Baseline first
Slides created outside a template	Slides in any released deck that are not an edited duplicate of a template slide	Zero
Already-answered RFI questions	Questions approved at W5-G1 whose answer was already in the sources	Zero
Unnamed data sources	Generic source tiles (“ERP”, “Data sources”, “Enterprise systems”, “Web data”, “Price catalogue”, “News API”, “Third-party APIs”) in any released solution or technical architecture	Zero
Approved deviations	Partial compliance or deviations the bid owner approved in a W4 bid, each with its reason	Reported per bid; baseline first

21. Risks, assumptions and open questions

The two biggest risks are routing an expensive request to the wrong workflow and independent reviewers still sharing blind spots. Confirmation at RT7, varied review methods, coverage logs and the escalation protocol counter both, but they need testing on real past bids.

Risks

Risk	Effect	Mitigation
Request routed to the wrong workflow	Hours spent on the wrong deliverable	RT7 confirmation for W1, W3, W4, W5, W6, W7; rule 1 asks when the inputs point elsewhere; rule 6 asks when nothing matches or two deliverables are named
RFP misclassified or partly parsed	Requirements missed at source	No RFP label on weak signals (RT2); clause count reconciled against the RFP’s numbering (W4-1)
Reviewers share blind spots	Contradictions still reach humans	Varied review methods; option of a different model per reviewer; escapes feed checklists (ESC-4)
Thin public sources for private companies	Fewer than five sourced pain points	The consultant decides whether to show fewer (W1-6) and can add call or network insight
LinkedIn access limits	Missed leadership statements	The consultant supplies links; search-indexed posts
QC loops run long on large RFPs	Deadline pressure	Deadline-aware scheduling (N-09); parallel passes
Over-reliance on automated demo tests	A demo that looks functional but gives wrong outputs	Mandatory human output review (W6-G2)

Assumptions

- The architecture formats, slide templates and process-flow reference in Appendix B are stable; a change to them is a configuration change, not a rebuild.
- The knowledge base and demo library can be indexed and tagged.
- The approver roles in Section 4 exist as described; they are additions (A.2).
- Small-deal PPT proposals go through the same QC as detailed documents.

Open questions

- ☐ Proposal types: the brief names two, the transcript-based proposal (W3) and the RFP-based proposal (W4). Are there more? Each would become a W3 variant
- ☐ Confirm the reading of the proofreading checks: the two things are the AI checks and the team's own proofreading; check three is the contradiction agent automating what the team's own proofreading finds; checks four and five are the internal contradiction and consistency check run two times (Section 3, 10.4). If the team wants its own read at check three as well, a human gate is added after W4-14. D3 also runs again after the first draft (W4-19) and in the deep QC (W4-23), beyond the brief's two times (an addition, A.2)
- ☐ Format bands for deals outside the ones stated (international above 25 lakhs; an international enterprise deal at any size; Indian below 15 lakhs; a smaller Indian client at any size) and the client-size threshold; today these go to the consultant
- ☐ Currency of the 750 blended rate, and whether it varies by geography
- ☐ Values to set before go-live: AI reduction ranges per task type, pain point scoring weights, revenue share models, infrastructure unit rates, and every other "To set" row in Section 18, plus the effort accuracy tolerance (Section 20)
- ☐ Tools to confirm: knowledge base location, diagram tool, voiceover and editing tools, email system, and the web search, news and pricing providers proposed in Section 18
- ☐ The QC exit rule (two consecutive clean loops is proposed) and the RFI question cap
- ☐ Template mapping for the intro deck (7.2) and the PPT proposal slide map (B.6); the cold and warm differences (7.2)
- ☐ Keep or strike each addition beyond the brief (A.2), including the slide counts in 9.2
- ☐ Upload the pending inputs (B.5): the tender bidding agent code; the Word proposal template; two past RFPs with their RFI question sets and final responses
- ☐ Which workflows form release 1; and confirm the word "flooring" in the construction domain sequence (14.4), kept as written in the brief (if it means footing, the foundation type, the soil branching applies unchanged)
- ☐ Problems template: add a description box to column 1 (Pain 01) of 2_Problems.pptx; until then, problem 1's explanation goes in the quote strip (7.2)
- ☐ The maximum number of loops per stage before a human decides (Section 18; 5 proposed)

Appendix A: Requirement coverage

Appendix A.1 maps every requirement in the brief to where this BRD covers it: 272 requirements, taken from Message 1 clause by clause (with every failure mode, example and number as its own row), Messages 2 to 8, the attached formats, templates and reference deck, and the team's standing preferences. Every row is covered; ten carry a reading for the team to confirm (rows 32, 85, 87, 92, 112, 113, 159, 160, 256 and 258) and one waits on an upload (row 185). Quotes are the brief's own words with filler words ("uh") and repeated words left out; "…" marks a longer cut.

A.1 Requirement mapping matrix (272 requirements)

Message 1, part 1: intro deck, showcase, proposals and the RFP process (rows 1 to 113)

#	From the brief	Requirement	Where the BRD covers it	Status
1	"build an AI agent which will do the solutioning work"	An agent that does the team's solutioning work	Section 1; Section 2	Covered

#	From the brief	Requirement	Where the BRD covers it	Status
2	“create a proper detailed BRD”	The output is a detailed BRD	Section 1 (document control); whole document	Covered
3	“break down the processes that we usually do”	Each process is broken down step by step	Section 1 (how to read it); Sections 7 to 16	Covered
4	“there is an introductory deck” … “that is on the exploratory side of things when it comes to a deck creation”	Intro (exploratory) deck deliverable	Section 2 (W1 row); Section 7	Covered
5	“cold approaching or warm approaching”	Cold or warm approach handled	5.4 (W1 row); 7.2 cold and warm table; W1-1; W1-13	Covered
6	“these are the use cases that can be done”	Show the use cases that can be done	Section 7 intro; W1-7; 7.2 slide 2	Covered
7	“top five use cases that are really, really useful to you”	Top five most useful highlighted	W1-5; W1-8 (stars the five priority tiles); 7.2 slides 2 and 3	Covered
8	“first study the company’s problems in depth”	Research company problems before mapping	W1-1 to W1-4; W1-G1	Covered
9	“cannot just overall give some high level use cases … applicable to that industry”	No generic industry use cases	W1-6; W1-7 guard; 7.1 rubric (specificity gate); F2	Covered
10	“really be mapped to that company’s problems”	Use cases mapped to the company’s own problems	W1-6; W1-8	Covered
11	“public transcripts if it’s a publicly listed company”	Listed company: public transcripts as source	W1-1; 6.4 Research	Covered
12	“founders or the key personnel’s LinkedIn’s”	LinkedIn of founders and key personnel as source	W1-1; 6.4 Research; Section 18 (Leadership posts row)	Covered
13	“there are few ways to actually find this”	Multiple research routes	W1-1	Covered
14	“Claude can do with the research agent”	A research agent does it	W1-2; 6.4 Research	Covered
15	“map the top five biggest pain points”	Rank and select the five biggest	W1-5; 7.1 rubric; Section 18	Covered
16	“Claude usually messes up with one of the pain points … very basic thing”	Failure mode: one basic pain point	Section 3 (F1); W1-6	Covered
17	“four of the pain points it will give in depth”	All five held to the same depth bar	Section 7 intro; W1-6	Covered
18	“AI spend is going very heavy … models are not optimized”	Example of a specific, sourced pain point	W1-6 (passing example); F1	Covered
19	“solve through some sort of orchestrator agent”	Example of pain point to solution mapping	W1-6 (passing example); F1	Covered
20	“randomly come to some fifth use case … invoice processing”	Example of a failing generic item	W1-6 (failing example); F1	Covered
21	“give no explanation … this is a real pain point that they’ve listed”	Every pain point explained as one the company itself listed	W1-6 output; 7.2 slide 3	Covered
22	“we create one periodic table”	Periodic table slide	W1-7; 7.2 slide 2; B.3	Covered
23	“displays a lot of use cases which can be employed to them”	Many company-applicable use cases	W1-7; 7.2 slide 2	Covered
24	“five of the real pain points … list them out as the real problems”	Slide listing the five real problems	7.2 slide 3 (Problems template, B.3)	Covered
25	“along with the sources where the problems came from”	Source per problem	7.2 slide 3; W1-2; W1-3; D8	Covered
26	“expand on the solutions in the next five slides”	Five solution slides	W1-8; 7.2 slides 4 to 13; B.3 (agents slide)	Covered
27	“after each solution, we give a solution architecture in a very specific format”	Architecture slide after each solution, in the house format	W1-9; 7.2 slides 4 to 13; B.1; B.6	Covered

#	From the brief	Requirement	Where the BRD covers it	Status
28	“that format I will attach … just put it as insert”	Format inserted	Appendix B intro; B.1	Covered
29	“a lot of the times the client even asks ki you show me what you have”	Showcase trigger	Section 8 (W2); 5.3 rule 1; 5.5	Covered
30	“few videos … few demos … relevant to whatever the topic is”	Pick relevant demos and videos	W2-1; W2-2	Covered
31	“we also create some detailed proposals”	Proposal deliverable	Section 2 (W3 row); Section 9	Covered
32	“proposals are actually fragmented into different parts”	Proposals come in several types or parts	Section 2 (W3, W4); 5.4; 9.2; Section 21 (open question)	Covered; confirm there are no other types (Section 21)
33	“One can be a simple transcript based proposal”	Transcript-based proposal (“simple” read as built from the call transcript alone; W3 itself can be complex or simple, 5.4)	Section 9 (W3)	Covered
34	“transcript is the most important thing”	Transcript is the primary input	Section 4 (W3 row); W3 inputs	Covered
35	“integrate with TLDV or … the recording part”	tl;dv or recording integration	6.4 Transcription; 5.2; W3-1; Section 18 (tl;dv row)	Covered
36	“generate the transcript from a video”	Video to transcript	6.4 Transcription; W3-1 to W3-3	Covered
37	“video needs to be converted to MP3, which we do separately”	Video to MP3 step	W3-2; Section 18 (Video to MP3 row)	Covered
38	“take that MP3 and we convert it into transcript separately”	MP3 to transcript step	W3-3; Section 18 (MP3 to transcript row)	Covered
39	“take the transcript and then we create a proposal”	Proposal built from the transcript	W3-5 to W3-14	Covered
40	“there are a few metrics that need to be considered … is the proposal supposed to be complex or … simple”	Proposal parameters set before drafting, complexity first	5.4 (W3 rows: complexity, output format, ROI, revenue share); RT6; Section 9 opening	Covered
41	“that depends on which stakeholders we’re talking to”	Complexity set by stakeholders	5.4; W3-4	Covered
42	“technical people … really care about the business logic in depth”	Complex variant leads with business logic in depth	5.4 audience profiles	Covered
43	“higher level people, like let’s say finance … don’t understand anything about technicals”	Simple variant for higher-level and business stakeholders	5.4 (W3 complexity row and audience profiles); Section 2	Covered
44	“purely be focused on what here is the value that you’re getting”	Simple variant leads with value	5.4 audience profiles	Covered
45	“This is how it will work”	Simple variant explains how it works	5.4 audience profiles	Covered
46	“We do keep the technicals, but we don’t emphasize”	Technicals kept but de-emphasised	5.4 audience profiles and the format note below it	Covered
47	“a high level solution architecture”	HLSA in every proposal	W3-9; 9.2; 9.3	Covered
48	“a technical architecture”	Technical architecture in every proposal	W3-9; 9.2; 9.3	Covered
49	“a few process flows that show how each user gets value”	Process flows per user showing value	W3-11; 9.2; 9.3; B.4	Covered
50	“the process flow should be as is and to be”	As-is and to-be	W3-11; 9.2; B.4	Covered
51	“as is obviously will be estimated most of the times”	As-is is usually estimated	9.4; W3-11; W4-11	Covered
52	“Gantt chart for the timeline”	Gantt	W3-12; W4-11; 9.2; 9.3	Covered
53	“We also have a RACI matrix”	RACI	W3-12; W4-11; 9.2; 9.3	Covered

#	From the brief	Requirement	Where the BRD covers it	Status
54	“how many FTEs … DSO … Some KPI metrics”	ROI inputs: FTEs, DSO, KPIs	5.4 (ROI row, RT6); W3-5; W3-13	Covered
55	“create a waterfall chart to show the ROI”	ROI waterfall when data exists	W3-13; W4-11; 9.2; 9.3	Covered
56	“all the visuals are cohesive”	Cohesive visuals	W3-15; W4-11; D5; F11	Covered
57	“RACI matrix also … there in the governance”	RACI sits in governance	W3-12; 9.2; 9.3	Covered
58	“the client will look at diagrams more than reading the text”	Diagram-first design	9.3 intro	Covered
59	“incorporate as many diagrams as possible without losing the actual content”	Maximise diagrams, keep all content	9.3 (both tables and the no-content-lost rule); W3-15; W4-11; D5	Covered
60	“solution architecture and technical architecture … comes in a format that we have”	Both architectures in house formats	W3-9; W4-8; B.1; B.2	Covered
61	“that format I will again upload in that insert part”	Formats inserted	Appendix B intro; B.1; B.2	Covered
62	“that is there on the non-RFP side”	Non-RFP vs RFP distinction	5.3 rules 1, 3, 4	Covered
63	“When we have an RFP … strict set of technical requirements … process changes”	Separate RFP workflow	Section 10 intro (W4)	Covered
64	“we have to really, really think about and comply with all of the requirements”	Full compliance	W4-4 and W4-5 (the requirement understood in depth); W4-10 (full compliance the default; a deviation only with the bid owner’s approval, Section 19); D1 (13.1); Section 20 (Requirement coverage, 100%; approved deviations reported per bid)	Covered
65	“everything is cohesively gelling together”	Everything consistent	D3; D5; W4-11	Covered
66	“First is the RFP itself”	Consolidate input 1: RFP	W4-1; W4-3	Covered
67	“Second is any updates based on any transcripts or calls”	Consolidate input 2: call updates	W4-2	Covered
68	“third is the RFI … answers … to the questions that we’ve asked”	Consolidate input 3: RFI answers	W4-2	Covered
69	“After consolidating all three together”	Merge the three	W4-3	Covered
70	“understanding what is the core, core benefit of the RFP”	Identify core benefit	W4-4	Covered
71	“a platform which does X, but they also want AI features on top … focus on the core platform”	Platform-vs-AI-features rule	W4-4 guard; W4-7	Covered
72	“we should have probably two agents”	Two agents	10.1 (Agent 1); 10.2 (Agent 2)	Covered
73	“consolidate all the information together, structure it”	Agent 1 consolidates and structures	W4-3	Covered
74	“give a preliminary requirement … core, core preliminary requirement”	Agent 1 outputs the core preliminary requirement	W4-4	Covered
75	“double, triple quality check”	Agent 2 multi-pass check	W4-5	Covered
76	“properly understood the requirements based on all of the information”	Understanding checked against all sources	W4-5	Covered
77	“on an unbiased basis”	Unbiased reviews	W4-5; 6.3	Covered
78	“taking all the information into consideration”	All information used	W4-5	Covered
79	“from blank, right? From scratch … every time”	Fresh context every review	W4-5; 6.3 items 1 and 2	Covered

#	From the brief	Requirement	Where the BRD covers it	Status
80	“otherwise it keeps giving the same answer to the same input”	Avoid convergent reviews	W4-5; W3-7; 6.3 item 2; F6	Covered
81	“two to three different unbiased and detailed reviews”	2 to 3 reviews	W4-5; Section 18	Covered
82	“once the requirement is understood, after that we build out the preliminary proposal”	Preliminary proposal after understanding is locked	W4-G1; W4-7 to W4-10	Covered
83	“then … incorporate all the diagrams”	Diagrams after preliminary proposal	W4-11	Covered
84	“and actually proofread things”	Proofreading stage	10.4; 10.5	Covered
85	“there are two things when it comes to proofreading”	Two components of proofreading	Section 3; 10.4; Section 21	Covered; confirm this reading (Section 21)
86	“proofreading is one of the most important parts … takes a lot and lot of time”	Context: proofreading is costly	Section 3; Section 20 (Senior review time)	Covered
87	“first, second, third, fourth, fifth checks usually are done through AI”	Five AI checks	10.4; W4-12 to W4-15; W3-16; Section 18; Section 21	Covered; confirm this reading (Section 21)
88	“check every line, check every word, check every image, check every table”	Every element checked	6.3 item 3; 13.1 coverage rule; W4-12	Covered
89	“Otherwise it doesn’t check tables or it doesn’t check images”	Failure mode: tables and images skipped	F5; 6.3 item 3; 13.1 coverage rule	Covered
90	“check everything for first compliance of requirements based on all of the RFP transcript”	Check 1: compliance	W4-12; W3-16	Covered
91	“second is again, a same compliance check … nothing is missed out”	Check 2: same compliance check again	W4-13; W3-16	Covered
92	“third is when we actually start proofreading on our own and we find some sort of contradiction”	Check 3: the team’s own proofreading finds a contradiction; the contradiction agent now does this check (a human read can be added after W4-14, Section 21)	10.4 intro; W4-14; Section 3; Section 21	Covered; confirm this reading (Section 21)
93	“This always happens. I’ve never seen it actually not happen”	Design assumes contradictions	Section 3; D2 (13.1), which runs in every W3 and W4 QC loop; 13.4 (trigger 1)	Covered
94	“we create a contradiction agent”	Contradiction agent	D2 (13.1); W4-14; W3-16	Covered
95	“which takes the requirements understanding”	D2 input: requirement understanding	D2 (13.1); W4-14	Covered
96	“reads the document for any sort of contradictions”	D2 reads whole document	D2 (13.1); 13.1 coverage rule	Covered
97	“brings that up and says, this is a contradiction”	Finding raised	W4-14; Finding object (6.2)	Covered
98	“explain why this even landed in the document after you did all the proofreading”	Drafter explains how it landed	ESC-2 (13.4); 10.4	Covered
99	“reevaluates everything … I missed this or … I added this”	Explanation names missed vs added	ESC-2; 6.2 Finding (how it got in)	Covered
100	“since you missed this, I cannot trust what you’ve given”	Trust reset	ESC-3	Covered
101	“Again, reevaluate everything in depth”	Full re-evaluation	ESC-3	Covered
102	“Don’t just give me … the same thought process”	No reuse of earlier reasoning	ESC-3	Covered

#	From the brief	Requirement	Where the BRD covers it	Status
103	“after that, we usually get a first draft”	First draft after re-evaluation	W4-17; W3-16; 10.4 escalation paragraph	Covered
104	“two to three QCs … complying with the requirements”	2 to 3 compliance QCs on first draft	W4-18; W3-17	Covered
105	“again look for any contradictions”	Contradiction check again	W4-19; W3-17	Covered
106	“if we find any, then we’ll ask it again to revise”	Revise on contradiction	W4-19; W3-17; 13.4	Covered
107	“finally, we proofread every word”	Final every-word proofread	W4-21; W4-G3; W3-18; W3-G3	Covered
108	“it’ll randomly promise a mobile app”	Block unrequested scope	D4 (13.1); HR-02; W4-16; F4	Covered
109	“or it’ll randomly contradict itself”	Block self-contradiction	D3 (13.1); F3	Covered
110	“contradiction, consistency across the document”	Document-wide consistency	D3 (13.1)	Covered
111	“SMS service for XYZ … secure because we are not following SMS”	SMS example	W4-15; F3	Covered
112	“an agent to check for contradiction within the document itself … and consistency”	Internal consistency agent	D3 (13.1)	Covered; confirm this reading (Section 21)
113	“This check is done two times”	Consistency check run twice	W4-15; W4-19; W3-16; W3-17; 13.3	Covered; confirm this reading (Section 21)

Message 1, part 2: commercials, demos, video, emails and RFI questions (rows 114 to 224)

#	From the brief	Requirement	Where the BRD covers it	Status
114	“ensure that all of our … commercial terms are in place”	Commercial terms check	D7 (13.1); W3-20; W4-23	Covered
115	“one time implementation fee”	Implementation fee line	12.3; 12.4	Covered
116	“compulsory AMC of 20% on the implementation fee”	AMC 20%, compulsory	12.3; 12.4; Section 18	Covered
117	“infra costs, which will be charged to the client as actuals”	Infra at actuals	12.3; 12.4	Covered
118	“platform build like a SaaS … some sort of revenue share”	Revenue share for platform builds	S1-8; 12.3; 12.4; S1-G2; 5.4	Covered
119	“if it’s a standard build, then this is the usual”	Standard build uses standard structure	12.3	Covered
120	“most of the times we actually give a indicative cost”	Indicative infra cost given	S1-7; 12.3; 12.4; HR-06; S1-G2 (12.2, Sections 4 and 19) decides whether the indicative amount is shown	Covered
121	“highlighted and it is bold that this is charged as actuals”	Infra line highlighted and bold	12.4 rules and table; HR-06	Covered
122	“this is not given to us”	Infra not paid to Mindmap	12.4 table wording	Covered
123	“we don’t have any margins on it”	No margin on infra	12.3; S1-7	Covered
124	“how big is the deal and how big is the client”	Format by deal and client size	5.4 (W3 output format row, RT6); Section 18 (format bands)	Covered
125	“15 lakhs or 25 lakhs, from an international standpoint … just make a PPT”	Small international deal: PPT	5.4 format bands; Section 18	Covered
126	“we don’t really need … a detailed technical document”	No detailed document for small deals	5.4; 9.2	Covered

#	From the brief	Requirement	Where the BRD covers it	Status
127	“fifteen to twenty lakhs is big for an Indian enterprise … detailed document”	Indian enterprise 15 to 20 lakhs: detailed document	5.4 format bands; Section 18 (15 lakhs and above; the range above 20 lakhs is an extension, A.2)	Covered
128	“after we have the PPT or the technical document and the QC is done and the commercials are checked”	Order: document, QC, then commercials	Section 12 intro; W3-16 to W3-20; W4 stages D to F	Covered
129	“how do we usually calculate commercials? … incorporate that agent”	Commercials agent	Section 12 (S1)	Covered
130	“understanding the man hours needed”	Man hours estimated	S1-1; S1-2 (inside W3-19 and W4-22)	Covered
131	“after we have the PPT or the technical document and the QC is done and the commercials are checked” and “how do we usually calculate commercials? … One is … understanding the man hours needed”	Commercials, starting with man hours, come after the document and its QC	12.1 (S1-1 to S1-G1) run at W3-19 and W4-22; provisional phase plan W3-10, W4-9; reconciled at W3-20, W4-23	Covered
132	“usually the Claude does not give correctly the first time”	Failure mode: first-pass man hours wrong	Section 3, F7; S1-3, S1-4	Covered
133	“QC one agent, QC two agent to ensure that the man hours are correct”	QC-1 and QC-2 on man hours	S1-3, S1-4, S1-5, S1-G1; Section 18	Covered
134	“multiply it into a seven fifty blended hourly rate”	Rate 750	12.2 formula legend; S1-6; Section 18	Covered
135	“That will give us the cost of humans”	Human cost = hours x rate	S1-6; 12.2 formula	Covered
136	“estimate a cost based on AI … use AI in development”	Estimate the AI-in-development saving	S1-6; S1-G2; Section 18 (AI reduction ranges per task type)	Covered
137	“how much will it bring us in terms of ROI … cost will reduce”	Cost reduced by the AI saving	12.2 formula and legend	Covered
138	“incorporate some overhead … 20 to 30%”	Overhead 20% to 30%	S1-6; 12.2 legend; Section 18	Covered
139	“how much will the client actually pay for”	Price set by what the client will pay	S1-9; S1-G2	Covered
140	“How much … might the client be willing to move ahead with”	Price set by willingness to proceed	S1-9; 12.2	Covered
141	“once the costs … are ready … deep QC to ensure consistency”	Deep QC after costs	W3-20, W4-23; 13.2 Deep QC	Covered
142	“costs are not there anywhere in the executive summary”	No prices in executive summary	HR-05; 12.4; 9.2 executive summary row; B.6 slide 6	Covered
143	“in the table of the commercials and not anywhere else”	Prices only in commercials table	HR-05; 13.1 D7; W3-20, W4-23	Covered
144	“keep one simple table … otherwise it confuses the customer”	One simple table	12.4	Covered
145	“between the cost that we charge and the cost that is charged by all these different things … two to three blank rows”	Gap of 2 to 3 blank rows between our charges and every third-party charge	12.4 (rule and layout); Section 18	Covered
146	“very clear within the table itself that this is not charged to us … actuals directly to you”	Wording inside the table	12.4 bullet and table; HR-06	Covered
147	“billed directly to you, not by us”	Exact message	12.4 table, infrastructure row	Covered
148	“That thing needs to be very ensured … clients get confused”	Checked every time	13.1 D7; D7 runs in every deep QC (13.3, W3 and W4 stage F)	Covered
149	“demo is impressive to a client, not just functional”	Demo must impress	Section 14 intro; W6-4; 14.3 acceptance; W6-G2	Covered
150	“UI is very important. It needs to look very good”	UI quality	W6-5; 14.3 checklist and acceptance; 13.3 W6 D5	Covered
151	“It needs to be functional”	Functional demo	W6-6; W6-8; 14.3 Functional	Covered

#	From the brief	Requirement	Where the BRD covers it	Status
152	“needs to bring real business value”	Real business value	W6-2; 14.3 acceptance criteria (real business value)	Covered
153	“show real depth in terms of the process”	Process depth	W6-3; 14.2	Covered
154	“broken down into 10 or 12 different sub agents”	10 to 12 sub-agents	W6-3; Section 18	Covered
155	“all of those sub agents need to actually be built into the platform”	Every sub-agent built	W6-6	Covered
156	“solving some real business problems”	Real problems solved	W6-2	Covered
157	“not just take a tender and send out a proposal”	Tender agent is not a one-step flow	14.4 opening; F10	Covered
158	“we first need to study the domain”	Domain study first	W6-1; W6-G1	Covered
159	“first is soil investigation, then … excavation, then … dewatering or shoring, then … flooring”	Domain sequence	14.4 domain sequence; Section 21 (the word “flooring” to confirm)	Covered; confirm the word “flooring” (Section 21)
160	“the flooring is decided on the basis of the soil investigation”	Soil decides flooring	14.4 domain sequence; soil branching table; Section 21 (the word “flooring” to confirm)	Covered; confirm the word “flooring” (Section 21)
161	“then … substructure, superstructure”	Sequence end	14.4 domain sequence	Covered
162	“you need to understand how it works because Claude will not do that”	Team’s domain knowledge is primary	W6-1 guard	Covered
163	“It will give you some very generic solution … floor the client like what is this”	Failure mode: generic demo	F10; W6-1 guard; W6-8 guard	Covered
164	“focus on real business problems in that domain”	Problem selection	W6-2	Covered
165	“documentation is a huge problem”	Documentation pain	14.4 opening; document compliance sub-agent	Covered
166	“Biggest problem … planning … margins get decided, the actual pricing gets decided”	Planning drives pricing and margin	14.4 opening; construction scheduling and pricing sub-agents	Covered
167	“the margins are very thin … less room for error”	Accuracy matters	14.4 opening; pricing and BOQ sub-agents (tolerances)	Covered
168	“document compliance”	Sub-agent: document compliance	14.4 sub-agent table	Covered
169	“the construction scheduling”	Sub-agent: scheduling	14.4 sub-agent table; soil branching table	Covered
170	“the construction pricing”	Sub-agent: pricing	14.4 sub-agent table	Covered
171	“the BOQ estimation”	Sub-agent: BOQ	14.4 sub-agent table	Covered
172	“the drawings”	Sub-agent: drawings	14.4 sub-agent table	Covered
173	“turning the drawings into specifications”	Sub-agent: drawings to specifications	14.4 sub-agent table	Covered
174	“each sub agent also needs to be broken down into the … depth that it deserves”	Per-sub-agent depth	14.2 template; W6-3; 14.4 sub-agent table	Covered
175	“even if you upload a tender you don’t know how the construction will flow”	Flow not derivable from tender alone	14.4 domain paragraph	Covered
176	“multiple branching paths depending on the soil investigation”	Soil-dependent branching	14.4 domain paragraph; soil branching table; scheduling sub-agent	Covered
177	“which sort of soil are we expecting? Or … want to calculate with?”	User selects soil type	14.4 soil branching table, Branch point	Covered
178	“it allows us to create the branching paths for all the rest of the flow”	Downstream re-plans per branch	14.4 soil branching table (What changes downstream, Propagation)	Covered
179	“there are multiple subflows … just this sub agent”	Sub-flows within scheduling	14.4 soil branching table, Sub-flows	Covered
180	“walk through all of these things in depth”	In-depth walkthrough	W6-3; W6-10 run sheet; 14.3 Depth	Covered

#	From the brief	Requirement	Where the BRD covers it	Status
181	“very important to impress the client also”	Impress	W6-4	Covered
182	“anything that is 3D is very impressive … not seen in a lot of applications”	3D as impact feature	W6-4; 14.3 Something rarely seen	Covered
183	“seeing their tender turn into a 3D representation along with the plan”	Tender to 3D with plan	14.4 sub-agent table, 3D agent	Covered
184	“3D agent is something that is added”	3D agent	14.4 sub-agent table	Covered
185	“I’ll actually upload the whole code itself so that you can review”	Code review of reference build	14.4 last row (insert); B.5; Appendix B insert placeholder	Covered; code upload pending (B.5)
186	“that kind of depth needs to go”	Reference depth applied	W6-3; 14.2	Covered
187	“Especially document parsing”	Parsing must work	W6-7 guard; W6-8	Covered
188	“test it with some out of samples, some in sample data”	In-sample and out-of-sample tests	W6-7; 14.2 Test cases	Covered
189	“outputs … of all of the different agents are actually what we’re looking for”	Expected outputs per sub-agent	W6-7; W6-8	Covered
190	“Playwright plus Claude and Chrome MCP”	Test tooling	W6-8; Section 18	Covered
191	“only serves to a certain extent … it is us who can actually review”	Human output review	W6-8 guard; W6-G2	Covered
192	“depending on the requirement … make the video”	Video when required	Section 15 opening; W7 router row	Covered
193	“put an AI voiceover”	AI voiceover	W7-3	Covered
194	“edit it”	Editing	W7-4	Covered
195	“base 44 is not seen in the URL”	Platform hidden in URL	W7-5; 14.3; HR-03	Covered
196	“At the bottom, if it is sometimes it is shown at the bottom”	Platform hidden at page bottom	W7-5; 14.3 (footer)	Covered
197	“either we send the video or we do the demo live”	Send video or live demo	W7-G1; W6-10; 5.5	Covered
198	“email drafts are mostly done by AI only”	AI drafts emails	Section 16 opening	Covered
199	“But they do need to be proofread”	Email proofread	W8-3 (D6); W8-G1 (human proofreads every word); HR-01	Covered
200	“AI definitely sends out some very weird emails”	Prevent odd emails	Section 16 opening and pattern table; W8-3	Covered
201	“It always promises a free demo … for every client, right? So that cannot be trusted”	No free demo	HR-01; 13.1 D4; W8-3; pattern table	Covered
202	“a free POC … it always promises … We need to remove that”	No free POC	HR-01; D4; pattern table	Covered
203	“Tone can be better … in the emails”	Better tone	W8-2; HR-10; pattern table (Tone off)	Covered
204	“RFIs also we spend a lot of time in”	RFI question workflow	Section 11 (W5); Section 3; Section 4; 5.4 Pursuit type	Covered
205	“study the details of all of the documents, all the transcripts, everything … first”	Study all sources first	W5-1	Covered
206	“then we need to actually check the questions”	Check questions	W5-3 to W5-8; Section 11 opening	Covered
207	“horribly stupid and … inconsistent questions, which are already answered”	Failure mode: poor, answered questions	F9; W5-3; W5-4; W5-8	Covered
208	“gives thousands of questions … some hundred or 200”	Failure mode: too many questions	Section 11 opening; W5-2; W5-9; F9	Covered
209	“first agent needs to actually check whether those questions are already answered”	Agent 1: answered check	W5-3	Covered
210	“second agent … check … if the questions are really relevant and which ones are actually needed”	Agent 2: relevance	W5-4	Covered
211	“Third agent needs to … simulate building the proposal and see where it’s getting stuck”	Agent 3: simulation	W5-5	Covered

#	From the brief	Requirement	Where the BRD covers it	Status
212	“we actually get into the solution itself … then we take out those questions”	Stuck points become questions	W5-5	Covered
213	“the agents need to simplify the English … very complex English”	Simplify wording	W5-7	Covered
214	“there needs to be simple English column”	Simple English column	11.2 buyer question sheet	Covered
215	“complex column so that people can actually track … where the question is coming from”	Complex column with source reference	W5-7 guard; 11.2	Covered
216	“the same question is not asked twice”	No duplicates	W5-8	Covered
217	“It’s not contradictory”	No contradictory questions	W5-8	Covered
218	“do some two to three QC checks”	2 to 3 QC rounds	W5-10; 13.3 W5 column; Section 18 (RFI QC repeats)	Covered
219	“manually review the questions and see if they’re already answered and … relevant”	Human review	W5-G1	Covered
220	“a manual cross-check agent … doesn’t just parse and check. Or even if it does parse and check, it does that very properly”	Cross-check that is not a shallow parse-and-check	W5-11 (briefed to prove the question unnecessary; pass rule); W5-6	Covered
221	“the problems are really there in the sections that it has brought out”	Cited section verified	W5-6; W5-11 pass rule	Covered
222	“the questions are not answered already”	Not-answered verified	W5-11; W5-3	Covered
223	“even after doing a lot of QC checks, these questions still remain”	Residual bad questions caught	W5-11 (brief and fallback); ESC-4	Covered
224	“I don’t know if a parsing agent will work”	Doubt about parsing	W5-11 pass rule and fallback; Section 18 (fallback rate)	Covered

Messages 2 to 8, the attachments, the team’s standing preferences and the order of steps (rows 225 to 272)

#	From the brief	Requirement	Where the BRD covers it	Status
225	Msg 2 “it looks too basic”	Depth	Whole BRD (Sections 5 to 21)	Covered
226	Msg 2 “properly broken down each and every flow”	Every flow broken down	Sections 7 to 16	Covered
227	Msg 2 “different types … exploratory decks, proposals and all”	Separate deliverables	Section 2 table; Section 4 catalogue	Covered
228	Msg 2 “a general solutioning agent which can do everything at once”	Not one general agent	Section 2, first sentence; architecture diagram (Section 6)	Covered
229	Msg 2 “how will it distinguish … what it’s supposed to make?”	Routing logic	Section 5 (5.1 to 5.5); routing diagram (5.5)	Covered
230	Msg 2 “reevaluate if this BRD … is actually … fully covering all the requirements”	Full coverage	Whole BRD; Appendix A.1	Covered
231	Msg 3 “really do a coverage matrix check … every single word, every single line”	Coverage matrix	Appendix A.1	Covered
232	Msg 3 “check all your diagrams, your tables, your lines, your words”	Self-check of all elements	Section 1 review record; Appendix A.1	Covered
233	Msg 4 “100% sure you’re complying with all requirements? Check every line, word, table, image”	Full compliance	Whole BRD; Appendix A.1	Covered
234	Msg 5 “These are solution/technical architecture diagram format”	Architecture formats used	B.1 and B.2 (both format images attached); W1-9; W3-9; W4-8	Covered
235	Msg 5 “I’ve also attached the slide templates”	Five templates included	B.3 table (File column: package path and the name each was supplied under) and the five template previews	Covered
236	Msg 5 “we ask claude to edit these slides and not make new slides”	Edit templates, never create slides	HR-12; W1-11; W3-14; W4-10; 7.2; 9.3; B.3; B.6; Section 20 metric	Covered

#	From the brief	Requirement	Where the BRD covers it	Status
237	Msg 5 “make sure to also attach these things”	Attachments in the BRD	Appendix B (image previews); B.3 (the five template .pptx files, the reference deck .pptx and the two architecture .png files travel as separate files)	Covered
238	Msg 5 “give me the final BRD”	Final BRD	Section 1 Document and Status rows	Covered
239	Msg 5 “here is a deck which shows how process flows look”	Process flow format followed	B.4; B.6 (slides 8 to 12 previews); 9.3; W3-11	Covered
240	Attachment: process summary slide per process	Summary slide	B.4 Process summary row; B.6 slides 9 and 11	Covered
241	Attachment: current-process swimlane slide	As-is swimlane	B.4 Current process row; B.6 slide 10	Covered
242	Attachment: target-process swimlane slide	To-be swimlane	B.4 Target process row; B.6 slide 12	Covered
243	Attachment: solution heat map	Heat map	B.4 heat map row; W3-11; B.6 slide 8	Covered
244	Pref: calm, measured, consultant tone	Tone rule	HR-10; W8-2	Covered
245	Pref: nothing hardcoded	All values in config	HR-13; N-06; 6.4 Config store; Section 18	Covered
246	Pref: Base44 never named in client outputs	Platform name hidden	HR-03; 13.1 D4; W2-4; W7-5; 14.3	Covered
247	Pref: no POC content or timings in use case slides	No POC in use case slides	HR-07; 7.2 slide 14 and paragraph below the slide table; 13.1 D4	Covered
248	Pref: use cases not labelled illustrative or hypothetical	Direct use cases	HR-08; 7.2 paragraph below the slide table	Covered
249	Pref: no em dashes in slide content	No em dashes	HR-09; 7.2; the BRD itself contains no em dash	Covered
250	Pref: technical architecture documents go deep	Deep tech architecture	9.2 Technical architecture row; W3-9; W4-8; 5.4 audience profiles	Covered
251	Pref: each use case its own standalone flow; explain each technology	Standalone flows, technologies explained	W3-9 guard; W4-8 guard; B.2 note	Covered
252	Pref: no internal cost basis or stretch notes in proposals	No internal basis	HR-04; 12.4; 13.1 D7; N-04	Covered
253	Pref: anonymised Q&A, never name the company	“we”/“our” only	HR-11; 5.4 W5 Anonymised Q&A; 11.2; W5-10	Covered
254	Pref: files individually, never zipped	No zips	HR-14; W7 output	Covered
255	Pref: decks as PowerPoint files	PowerPoint decks	HR-15; W1 output	Covered
256	Order: RFP checks 1 compliance, 2 compliance again, 3 contradiction agent, 4 and 5 internal consistency, escalation, first draft	Stage D order	10.4 (W4-12 to W4-17 and the escalation paragraph); W4 flow diagram (10.6)	Covered; confirm this reading (Section 21)
257	Order: first draft, then 2 to 3 QCs, contradictions again, revise, proofread every word	Stage E order	10.5 (W4-18 to W4-G3); W4 flow diagram (10.6)	Covered
258	Order: consistency/contradiction agent run two times	D3 twice	W4-15; W4-19; 13.3	Covered; confirm this reading (Section 21)
259	Order: commercials after QC	Cost and price after QC and proofread	W3-19 after W3-G3; W4-22 after W4-G3; Section 12 opening	Covered
260	Order: deep QC after costs	Deep QC after commercials	W3-20; W4-23; S1-10 guard	Covered
261	Order: RFI agents 1 answered, 2 relevant, 3 simulate	Agent order	W5-3, W5-4, W5-5, then W5-7 and W5-8; Section 11 opening	Covered
262	Msg 6 “What about RFP based proposals”	RFP-based proposal as the second proposal type, with the full proposal contents	Section 2 (W4 row); Section 4 (W4 output); Section 5.3 rule 1; Section 10 (opening and Output row); Section 21 (proposal types)	Covered

#	From the brief	Requirement	Where the BRD covers it	Status
263	Msg 6 “all solution architecture diagrams should have named data sources”	Every solution architecture names its data sources	HR-17; B.1 (Data sources row and note); B.2 (Integrations row); W1-9; 7.2 (architecture slides); 7.3; W3-9; 9.2; 9.3; W4-8; W4-11; D5 (13.1); Section 20 (Unnamed data sources); Section 6 diagram (named data sources band)	Covered
264	Msg 7 “data sources from the web such as price catalogues and news apis should be explicitly named”	Web data sources named by provider and feed	B.1 (Data sources row); B.2 (Integrations row); HR-17; D5 (13.1); Section 20 (Unnamed data sources); 12.4 (paid data feeds on their own row); Section 18 (Company research and Infrastructure cost inputs: named providers); 6.4 Research; Section 6 diagram (named data sources band: Claude web search, NewsAPI.org and cloud price list tiles)	Covered
265	Msg 8 “GO INTO DEPTH ABOUT USAGE OF BRD AND TEMPLATES VIA A READ ME”	An in-depth READ ME on how to use the BRD and the templates	00_READ_ME_FIRST (travels with this BRD); Section 1 (Formats and templates row); B.3	Covered
266	“unless that is like one, some of the drawing applications”	A feature impresses only if this audience does not already see it in its own tools	W6-4; 14.3 (something rarely seen)	Covered
267	“when we actually consider these things together at once”	The sub-agents are designed as one connected flow, not separate tools	14.2 (Inputs from the earlier sub-agent, Outputs to the next, Branching); 14.4 sub-agent table; W6-3	Covered
268	Order: study the company’s problems, then the periodic table, then the five real problems with sources, then five solutions each followed by its architecture	Intro deck order	W1-1 to W1-9; 7.2 slide order	Covered
269	Order: video to MP3, MP3 to transcript, transcript to proposal	Transcript pipeline order	W3-1 to W3-3, then W3-4 onward; 6.4 Transcription	Covered
270	Order: solution and technical architectures, process flows, then the Gantt, RACI and ROI waterfall	Proposal contents order	9.2 section order; W3-9 to W3-13; W4-8, W4-11	Covered
271	Order: man hours, QC-1 and QC-2, times the 750 blended rate, the AI reduction, overhead, the client price, then the deep QC	Commercials calculation order	S1-1 to S1-10; 12.2 formula; W3-20, W4-23	Covered
272	Order: study the domain, pick the real problems, break the process into sub-agents in depth, build, test in and out of sample, human output review, then the video or a live demo	Demo order	W6-1 to W6-10 with W6-G1 and W6-G2; Section 15 (W7)	Covered

A.2 Added beyond the brief (keep or strike)

Item	Where	Why it was added
Router mechanics: document classifier, six ordered rules, confirmation card; W2 and W8 proceed without waiting	Section 5	Needed to answer how the agent decides what to make
Orchestrator and follow-on proposals; mid-flight impact check by RT3 with baseline re-lock	Sections 5, 5.5	Workflows must hand over and react to new sources
W5 runs before W4 while an RFP’s clarification window is open	Rule 2	RFI answers are a consolidation input to the RFP-based proposal (W4)
Mixed audience profile	5.4	A meeting often has both technical and business stakeholders
Approver roles: presales consultant, bid owner, solution architect, delivery lead, pricing owner, domain owner, demo builder	Section 4	The brief names no approvers

Item	Where	Why it was added
Evidence verifier and recency window; named people to cover in research	W1-1, W1-3	Stops misquoted or stale sources reaching slide 3
Pain point scoring rubric and weights	7.1	Makes “the five biggest” testable
Periodic table tiles from the accelerator catalogue, count from the template grid, relevance check	W1-7	The brief does not say where the tiles come from
Showing fewer than five pain points when the pool runs out (consultant decides)	W1-6	The brief does not say what to do then
What changes between a cold and a warm deck	7.2	The brief names both without saying what differs
Template mapping for solution, engagement methodology and offerings slides; demo shortlist; title and closing slides	7.2	The brief attached the templates without assigning each to a slide
Template library; a deck holds when a slide type has no template	HR-12, W1-11, W3-14, W4-10, B.3, B.6	Enforces “edit these slides, not make new slides” even if a template is ever missing from the library
W2 talk track, fit reviewer, branding and data check; proposing a new demo build when nothing fits	Section 8	Avoids showing a weak or another client’s demo
Speaker mapping; later statements supersede earlier ones	W3-4, W3-6	Needed to set complexity and resolve conflicting calls
Baseline-lock and architect gates	W3-G1, W3-G2, W4-G1, W4-G2	Every later check needs a fixed reference
Two understanding reviews for transcript-based proposals (W3); W3 runs the same two QC rounds as W4	W3-7, W3-17	Mirrors the RFP process
Different methods for each understanding review	W3-7, W4-5, 6.3	Makes “not the same answer twice” enforceable
Provisional phase plan for the Gantt, reconciled with the reviewed man hours in the deep QC	W3-10, W4-9, W3-20, W4-23	The Gantt is drafted before the commercials step, while man hours stay where the brief puts them
Diagram opportunities table and the no-content-lost rule	9.3	Makes “as many diagrams as possible without losing the content” checkable
As-is estimation method	9.4	The brief says the as-is is usually estimated, without saying how
Clause-count reconciliation, page budget, compliance matrix	W4-1, W4-7, W4-10	Makes full compliance checkable
Partial compliance and deviation path, each decided by the bid owner as soon as it is raised	W4-10, D1, Section 20	A requirement that cannot be met needs a stated, approved answer rather than a false “complies”
Third-party charges other than infrastructure on their own rows; named web sources for the agent’s own research and pricing inputs	12.4, S1-7, Section 18	Applies the brief’s “all these different things” and Messages 6 and 7 to the commercials table and to the agent itself; the providers named in Section 18 are proposals to confirm
Reading of the two things in proofreading and of AI checks three, four and five	Section 3, 10.4	The brief does not name them; confirm (Section 21)
Stage D restart after an escalation; a new drafting instance and a re-evaluation note; root cause added to checklists	10.4, ESC-4	Makes “re-evaluate everything” checkable: a fresh drafter, a written note of what was re-checked, and a full re-run of the checks
AI reduction estimated per work package; overhead proposed from the engagement’s load	S1-6	The brief names both values without saying how each is set
Infrastructure estimator; revenue share modeller with configured models	S1-7, S1-8	The brief asks for an indicative infra cost and a revenue share without saying how they are produced
Price recommended by the agent and approved by a pricing owner	S1-9, S1-G2	The brief names no approver

Item	Where	Why it was added
Structured data objects; coverage log on every pass; D8 source check	6.2, 6.3, 13.1	Makes “check every line, table and image” enforceable
Exit rule (two consecutive clean loops), severity levels, gate-specific escalation triggers and return points	13.2, 13.4, 13.5	A loop needs a stopping rule and a bar for release
Provisional register; W5-5 drops questions that unblock nothing; question cap with cut questions shown to the approver	W5-1, W5-5, W5-9	No baseline exists yet; stops hundreds of questions
Section verifier; cross-check pass rule and fallback	W5-6, W5-11	A proposed answer to the doubt that a parsing agent will work
Buyer question sheet split from the internal tracker	11.2	Internal columns must not be published to every bidder
Buyer submission check, with changes sent back through the deep QC	W4-24	Forms, signatures and page limits often decide eligibility
Ban on price or timeline promises in W2 and W8; weird-email patterns beyond free demo, free POC and tone	D4, Section 16	Same risk as free demo and POC offers; makes “weird emails” checkable
Domain owner role, domain map gate, run sheet	W6-1, W6-G1, W6-10	Puts the team’s domain study first, as the brief asks
Demo acceptance criteria	14.3	Makes “impressive, not just functional” checkable at W6-G2
Soil branching mechanism; sub-agent specs with inputs, outputs and tests	14.4	Applies the 14.2 depth template to the brief’s example
Browser-automated recording, voice per client region, captions and title cards	W7-2 to W7-4	Repeatable, client-appropriate videos
Email-type table	Section 16	Sets the email’s content from the pursuit stage
Format band defaults (including Indian enterprise deals above 20 lakhs as detailed-document deals) and the rule for deals outside them	5.4, Section 18	The brief gives examples, not bands
F11 failure mode; HR-16 company facts rule; N-05 data residency; priorities	Sections 3, 17, 18, 19	Cohesive visuals; accurate company claims; sensitive bids
House rules from the team’s standing preferences	Section 17 (Source column)	Applied to every output
Statements of judgement: “a misread RFP is the most expensive error”; slide counts in 9.2	5.2, 9.2	Design assumptions to confirm
Thresholds for classification, library match, recency, the question cap and the cross-check fallback	Section 18	Keeps every decision configurable, not hardcoded
Out-of-scope list; non-functional requirements; success metrics, including zero slides outside templates and zero already-answered RFI questions	Sections 4, 19, 20	Standard BRD content
Reference deck slides used as templates, and the PPT proposal slide map	B.6, 7.2	The brief sent the deck for process flows; its other slides cover the slide types the five templates do not, so no slide is ever created
Showcase limited to one to three picks	W2-2, Section 18	The brief says “a few”; a number makes the step testable
MP3 conversion and transcription skipped when tl;dv supplies a usable transcript	W3-3	Avoids transcribing twice
Addressable gate for pain points; sources for slide value figures and screens; ROI lever estimates	7.1, 7.2, W3-13	Stops the agent inventing solutions, figures or screens
User role served added beside the component tag on to-be process cards	B.4, W3-11	Shows how each user gets value, as the brief asks, within the reference deck format
Contradictions found by checks 3 to 5 escalate together, once W4-15 completes	10.4	One re-evaluation covers every contradiction found in the loop
Maximum loops per stage, with a human decision when it is reached	13.5, Section 18	Every loop must end


Item	Where	Why it was added
A detailed document holds while the Word template is pending	W3-14, W4-10	The agent never invents a layout

Also added beyond the brief: research sources other than public transcripts and LinkedIn (interviews, press, job posts, investor presentations, annual reports) and fit to Mindmap as a tie-breaker (W1-1, W1-5); full technical depth in an appendix for simple proposals (5.4); escalation on critical, major or unlogged issues at document gates (13.4); D3 run twice in each QC stage and the deep QC run over the whole document; a buyer's price schedule taking precedence (12.4); tl;dv account and failure handling (Section 18); and wording or details such as "a separate manual step today", "strict and scored", the UI checklist (14.3), the extra places W7-5 checks, short emails by default (W8-2) and the AMC per-year basis (12.4).

Appendix B: Formats, templates and pending inputs

The architecture formats, slide templates and process-flow reference supplied by the team are attached here. The agent follows these formats and edits these templates; it never invents its own layout.

B.1 Solution architecture format

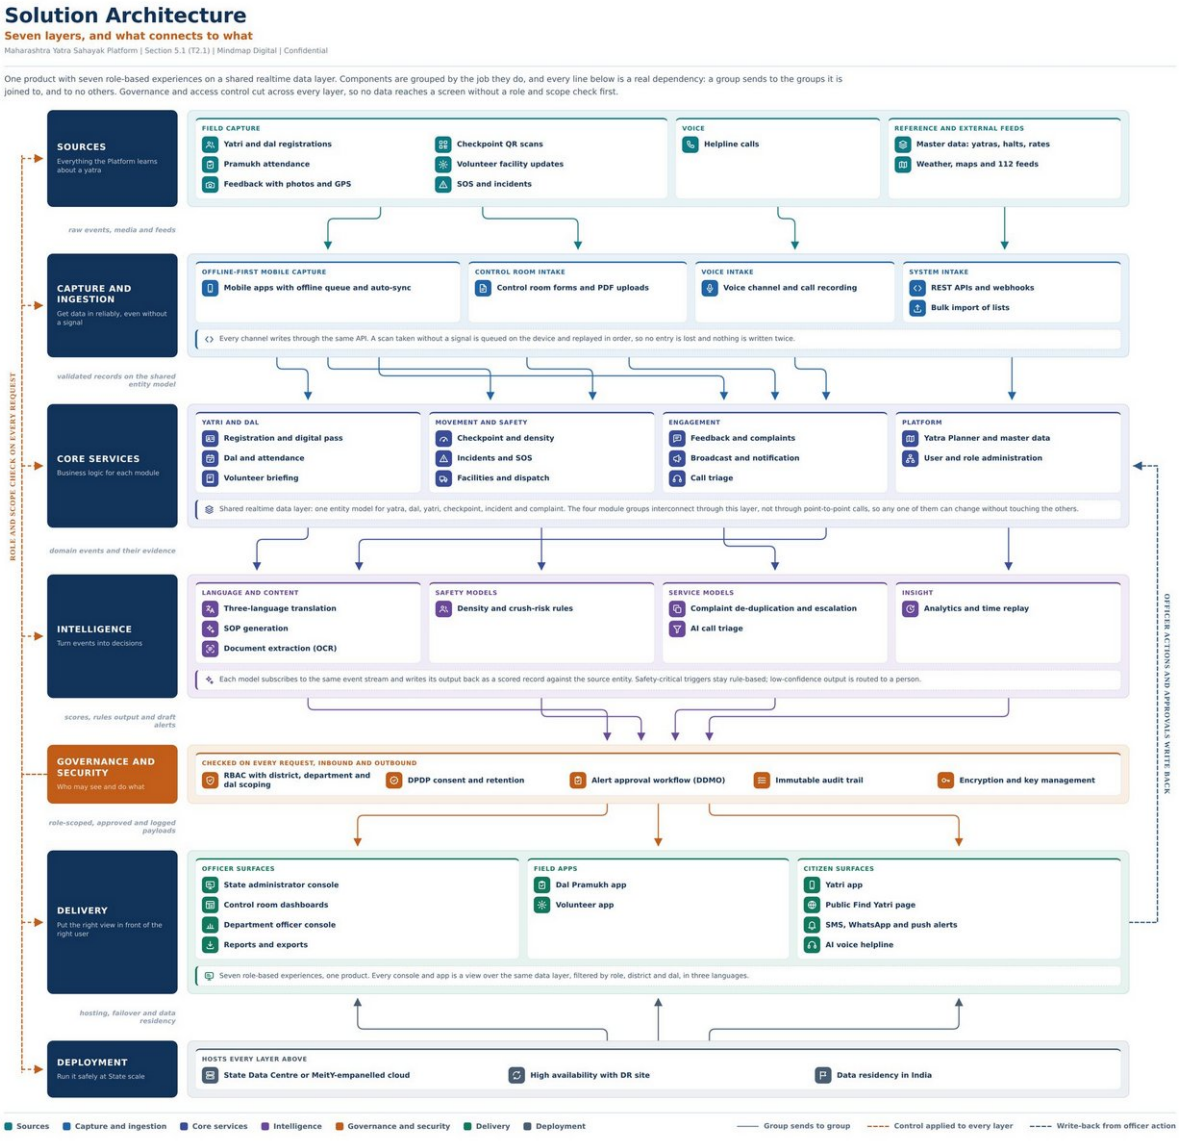


Solution architecture format (B.1)

Element	Rule
Header	Title “Solution Architecture”; an orange subtitle that states the point (for example “Seven layers, and what connects to what”); a meta line with platform, section, Mindmap Digital, Confidential
Lead	One paragraph on what the product is and how the layers depend on each other
Layers	A left column of navy tiles, top to bottom, each with a layer name and a one-line role: Sources, Capture and ingestion, Core services, Intelligence, Governance and security (orange, applied to every request), Delivery, Deployment. The set adapts to the solution
Data sources	Every data source is named: the system or file and the data taken from it (for example “SAP S/4HANA: vendor master, open purchase orders” or “tender PDFs from the buyer’s e-procurement portal”), never a generic tile such as “ERP”, “Data sources”, “Enterprise systems”, “Web data”, “Price catalogue”, “News API” or “Third-party APIs”. Names come from the client’s own sources (transcripts, RFP, RFI answers, research) and are cited in the Case File. Where no source names a system, the architect proposes the most likely one from the evidence and flags it; the gate (W1-G2, W3-G2, W4-G2) confirms or replaces it. If nobody at the gate can name it, in W3 and W4 it is put to the client: added to the W5 question sheet while a clarification window is open, otherwise asked directly by the consultant or bid owner; in W1 the consultant names the most likely system. Sources from the web are named the same way, by provider and feed: a price catalogue by its publisher, format and refresh (for example “distributor price catalogue, Excel, monthly upload” or “LME: copper and aluminium prices, daily”), a news feed by its API (for example “NewsAPI.org: company and sector news”), and so on for every market, weather or reference feed. Where the provider is not yet chosen, the architect proposes a named one, flagged for the gate like any other source. The technical architecture’s Integrations layer uses the same names (HR-17)
Groups	Each layer is a tinted panel of groups (small-caps label) holding items, each an icon and a short name
Note strip	One line under a layer where its groups need explaining
Connectors	Arrows only where one group really sends to another; each gap is labelled on the left with what flows (for example “validated records on the shared entity model”)
Cross-cutting lines	Dashed lines for controls applied to every layer and for write-backs
Legend	Layer colours and line types at the foot

The format image shows layout only. Its header, layer contents and feeds (including the unnamed “Weather, maps and 112 feeds” tile) come from an earlier pursuit and are never copied: every architecture is written fresh for its client, with every data source named (HR-17).

B.2 Technical architecture format

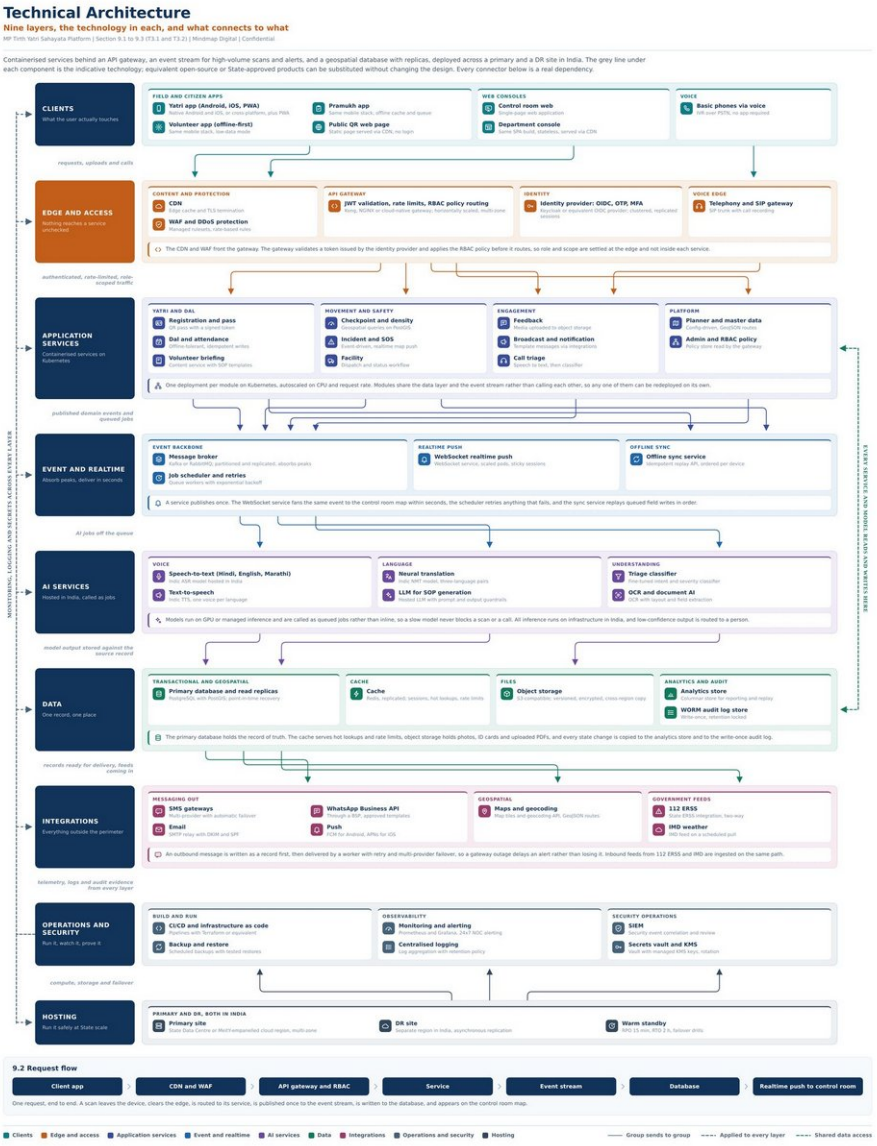

Technical architecture format (B.2)

Element	Rule
Header	Title “Technical Architecture”; an orange subtitle stating the layers and what connects; the same meta line
Lead	One paragraph on the deployment approach, saying the grey line under each component is the indicative technology and equivalents can be substituted without changing the design
Layers	Clients, Edge and access, Application services, Event and realtime, AI services, Data, Integrations, Operations and security, Hosting; adapted per solution
Items	An icon, the component name, and a grey line naming the indicative technology
Integrations	Every external system, data source and web feed is named by its provider and the data or service taken from it, with the same names as the solution architecture (HR-17); never a generic label such as “SMS gateway” or “Maps and geocoding API” alone
Note strip	One line under a layer where its parts need explaining
Connectors	Real dependencies only, labelled on the left (for example “authenticated, rate-limited, role-scoped traffic”)
Cross-cutting lines	Dashed lines for monitoring, logging and secrets across every layer, and for shared data access
Request flow	A strip of chevrons showing one request end to end, with one sentence under it
Legend	Layer colours and line types at the foot


The accompanying text documents each use case as its own standalone flow and explains what each named technology is (team standing preference). Like B.1, the format image shows layout only: its header, components and integrations come from an earlier pursuit and are never copied.

B.3 Slide templates (edit, never create)

Every deck slide is a duplicate of one of these template slides, edited by changing text and images only (HR-12). No slide is ever created from scratch. The five template .pptx files, the 40-slide reference deck (.pptx) and the two architecture format images (.png) travel with this BRD as separate files, in the folder 02_Templates with the sub-folders Slide templates, Reference deck and Architecture formats (file names in the table below). 00_READ_ME_FIRST explains how each one is used.

Template	Used for	Status	File in 02_Templates (name as supplied)
Periodic table	W1 slide 2	Attached	Slide templates/1_Periodic_Table.pptx (periodic_table_small_detailed)
Problems	W1 slide 3	Attached	Slide templates/2_Problems.pptx (Problems)
Agents slide	W1 solution slides 4, 6, 8, 10 and 12, duplicated once per solution; solution slides in PPT proposals	Attached	Slide templates/3_Agents_Slide.pptx (agents_slide)
Engagement methodology	W1 slide 14; engagement approach in PPT proposals	Attached	Slide templates/4_Engagement_Methodology.pptx (Engagement_Methodology)
Offerings	W1 slide 15	Attached	Slide templates/5_Offerings.pptx (Offerings)
Title, architecture (full-visual) and closing slides	W1 slides 1, 5, 7, 9, 11, 13 and 16	Attached: reference deck slides 1, 8 and 40 (B.6)	Reference deck/Reference_Deck_Slides.pptx
PPT proposal slides	W3 and W4 when delivered as a PPT	Attached: the reference deck slides mapped in B.6, with these five templates	Reference deck/Reference_Deck_Slides.pptx and the five files above

Previews follow.

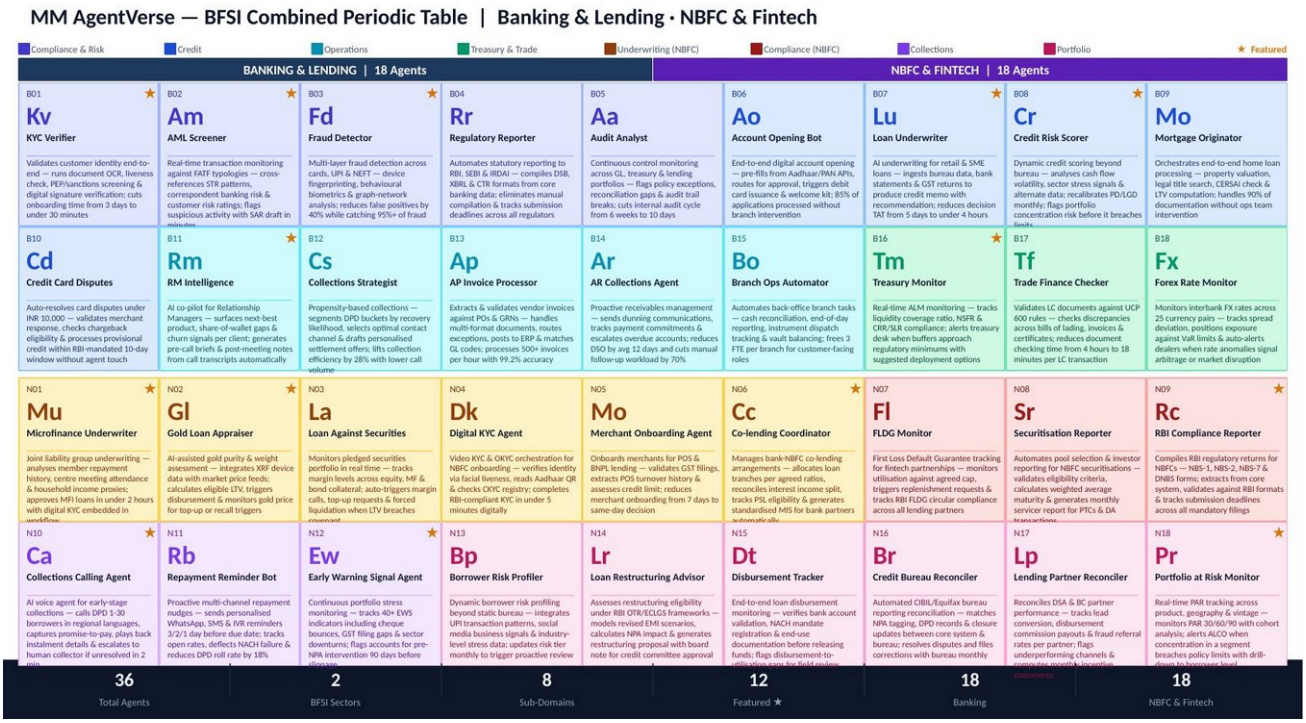


Template 1: periodic table




Template 2: problems



Template 3: agents slide

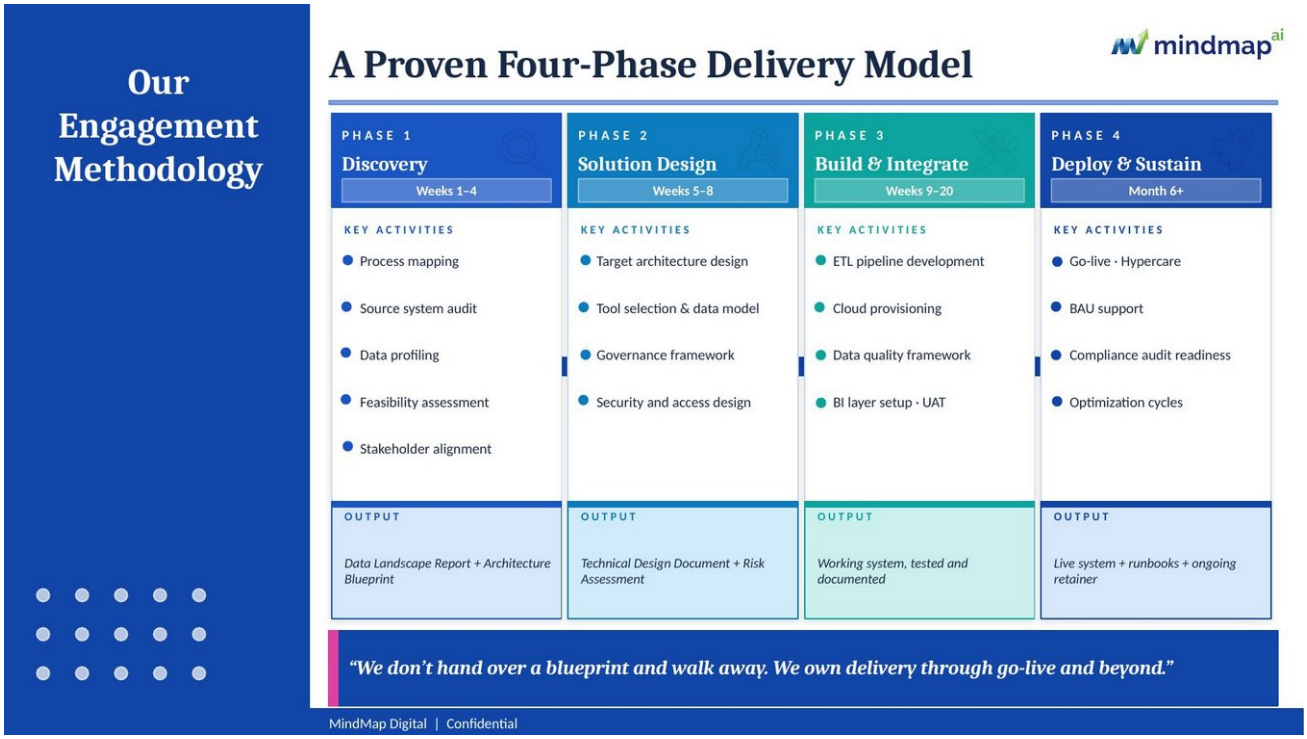

Template 4: engagement methodology

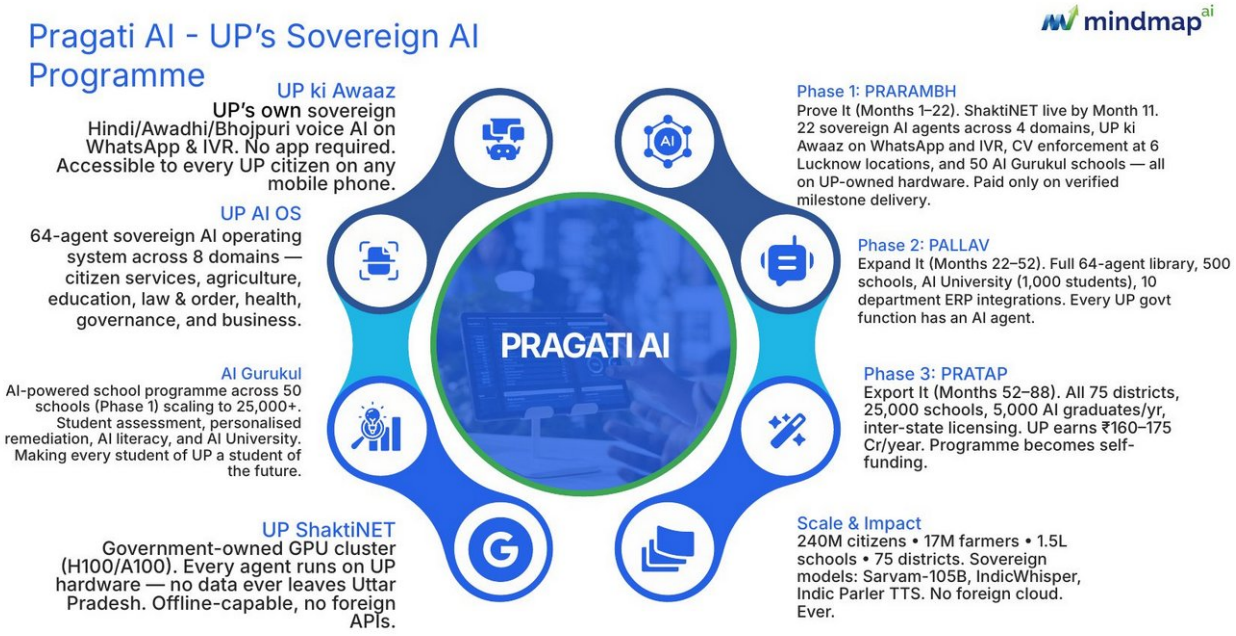

Template 5: offerings

B.4 Process flow format

The reference deck (previews in B.6, slides 8 to 12) shows the format. Each process gets a "today" summary slide and a current-process swimlane, then an "on the platform" summary slide and a target-process swimlane.

Slide	Format
Process summary	"Process N, name"; a two-line summary; KPI tiles; a "today" panel of six icon items (each step and what it costs), or on the second summary an "on the platform" panel; a numbered step list on the right

Slide	Format
Current process	One swimlane per sub-process: a navy lane header with the lane name and step references; numbered cards left to right, each with an actor tag (for example BRANCH, ACCOUNTS, CUSTOMER), a title in capitals and a one-line description; the step where it breaks tinted red; a “Where the effort goes” box at the foot
Target process	The same lanes with green headers; each card tagged by platform component (for example CONNECTOR, LANDING, CANONICAL, ENGINE, AGENT, EXCEPTION) or by the acting role (for example BRANCH, FINANCE); in proposals the user role served is added beside the component tag (added; see A.2); agent steps tinted amber; a “What changes” box at the foot
Solution heat map (when a solution spans several areas)	Areas as columns and capabilities as tiles, coloured by automation potential: high (deterministic, runs without a person), medium (an agent proposes, a person approves), low (judgement retained by the client); a star marks what is delivered in the first phase

In a proposal, each process gets these slides (or the same panels as figures in a detailed document), with the as-is actor tags set to the client’s own user roles or systems, and each to-be card showing, beside its platform component tag, the user role that acts on or receives its output, so each user’s value is visible.

B.5 Still pending

Item	Referenced in	Status
Tender bidding agent code (full sub-agent list and depth review)	14.4	Awaiting upload
Detailed proposal document template (Word)	W3-14, W4-10	Awaiting upload
Two past RFPs with their RFI question sets and final responses, for testing	W5-11; Section 21 (testing W4 and W5 before go-live)	Awaiting upload

Insert: Tender bidding agent code review

Insert here: the tender bidding agent code review, once the code is uploaded (B.5).

B.6 Reference deck slides used as templates

The reference deck sent with the templates (40 slides) is also a set of Mindmap slides the agent duplicates and edits. It supplies the slide types the five templates in B.3 do not: the title and closing slides, the company and team slides, the problem and current-state slides, the heat map, the process slides, and a full-visual slide that carries one diagram. That full-visual slide (slide 8, shown below carrying the solution heat map) is how architectures, the Gantt, the RACI, the ROI waterfall and the commercials table reach a deck without a slide being created. The slide numbers below are the deck’s own.

Slide in the reference deck	Layout	Used for
1 Title	Logo, title, date, confidentiality footer; any expired badge removed (HR-16)	W1 slide 1; the first slide of a PPT proposal
2 About us	Company text, presence map, key figures	“About Mindmap” in a PPT proposal; figures, badges and certifications only from the approved company profile (HR-16)
3 Founding team	Three leadership profiles	PPT proposal, when the client asks who leads the work (optional)
4 Our solution	Central platform with surrounding capabilities	Solution overview in a PPT proposal
5 Where it breaks	A statement and three numbered problem panels	Understanding of the need in a PPT proposal
6 Current state	A statement, “where the effort goes” and “what the platform changes”	Executive summary in a PPT proposal (no prices, HR-05); assumptions and exclusions
7 Agent portfolio	Agents in a periodic-table grid, grouped by domain	Agent landscape, when the solution spans several areas
8 Full-visual slide	Breadcrumb title, logo, one full-width visual	The solution heat map; with the visual replaced, every architecture slide (B.1 or B.2 format), the Gantt, the RACI, the ROI waterfall and the commercials table
9 and 11 Process summary	KPI tiles, the “today” or “on the platform” panel, a step list	Process summaries, today and on the platform

Slide in the reference deck	Layout	Used for
10 and 12 Swimlanes	Full-visual current and target swimlanes	As-is and to-be process flows
39 Capabilities	Technology pillars	Optional capability slide
40 Closing	Call to action, offices and contacts from the approved company profile; any expired badge removed (HR-16)	W1 slide 16; the last slide of a PPT proposal


PPT proposal slide map (W3 and W4 when delivered as a PPT)

Proposal slide	Slide to duplicate and edit
Title	Reference deck slide 1
About Mindmap	Reference deck slide 2 (figures from the approved company profile, HR-16)
Leadership (optional, when the client asks who leads the work)	Reference deck slide 3
Executive summary	Reference deck slide 6
Understanding of the need	Reference deck slide 5
Solution overview	Reference deck slide 4, and the agents slide template (B.3) once per solution
Agent landscape (when the solution spans several areas)	Reference deck slide 7
High-level solution architecture	Reference deck slide 8, with the architecture in the B.1 format
Technical architecture	Reference deck slide 8, with the architecture in the B.2 format
Process flows	Reference deck slides 9 to 12, repeated per process; the heat map on slide 8 when the solution spans several areas
Timeline	Reference deck slide 8, with the Gantt as the visual
Governance	Reference deck slide 8, with the RACI as the visual
ROI (if data exists)	Reference deck slide 8, with the waterfall as the visual
Commercials	Reference deck slide 8, with the one commercials table in the visual area (12.4)
Compliance matrix (W4)	Reference deck slide 8, with the matrix as a native table in the visual area, continued over as many duplicates as it needs
Assumptions and exclusions	Reference deck slide 6
Engagement approach	Engagement methodology template (B.3); phase timing labels set from the approved Gantt and reconciled at the deep QC
Capabilities (optional)	Reference deck slide 39
Close	Reference deck slide 40

Slides 13 to 38 of the reference deck repeat the process slides for the earlier pursuit's processes 2 to 10 (summaries and swimlanes for processes 2 to 5; summaries only for processes 6 to 10). They show the format at scale and are not separate templates: process slides are always duplicated from slides 9 to 12, and none of that pursuit's content is carried over. Optional slides (3, 7 and 39 in a proposal; slides 14 and 15 in W1) are included when the consultant, or the bid owner in W4, chooses them at RT7, and are confirmed at the release gate.

Slides 8, 10 and 12 hold their visual as a single picture (13.33 by 4.68 inches) under the title. The visual engine renders each new architecture, swimlane, heat map, Gantt, RACI or ROI waterfall as an image in the B.1, B.2 or B.4 style at that size and replaces the picture; the title text is edited. A diagram that does not fit legibly, such as a nine-layer technical architecture, is re-laid landscape or continued on a second duplicate of slide 8. The commercials table and the W4 compliance matrix are placed as native PowerPoint tables in the same area, not as images, so the checkers and the client can read them. The source data of every rendered image is kept in the Case File, so D5 checks the data, not the pixels.


The mapping is proposed for the team to confirm (Section 21). In every case text and images change; fonts, sizes and formatting stay as they are (HR-12). Previews of the slides used follow.

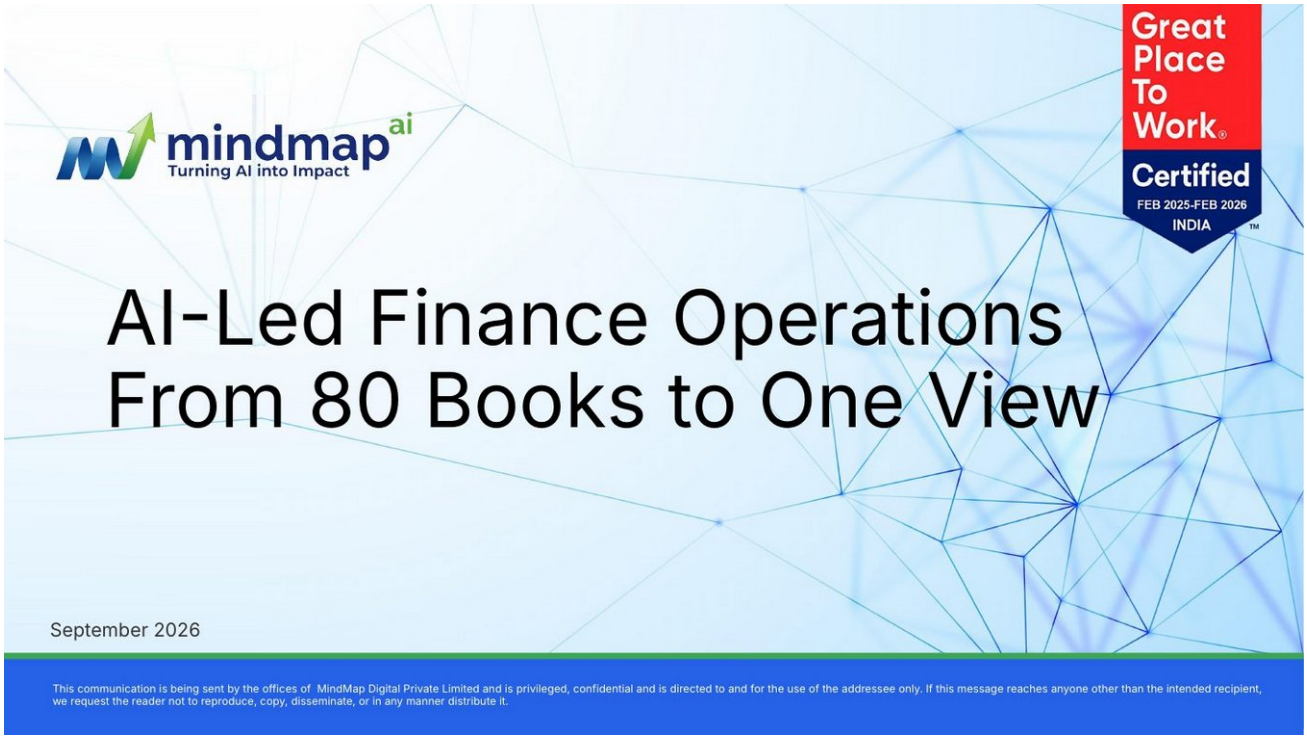

Reference deck slide 1: title




Reference deck slide 2: about us

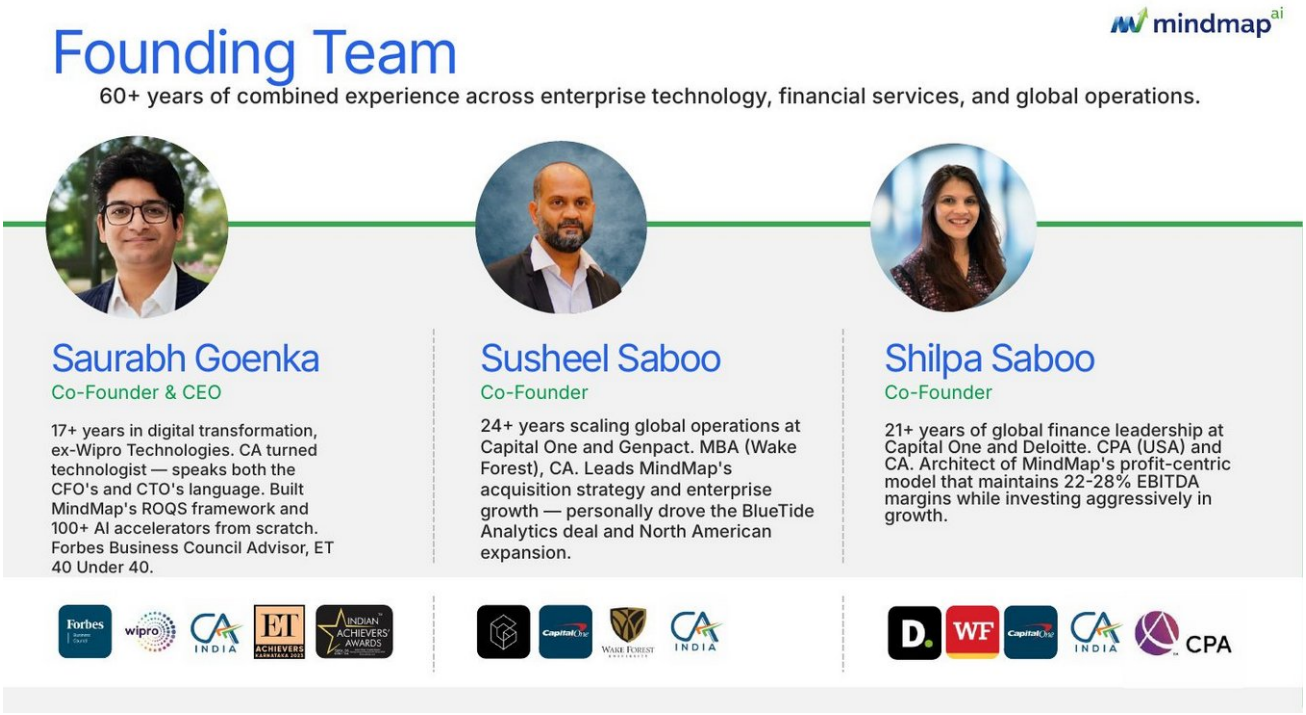


Reference deck slide 3: founding team




Reference deck slide 4: our solution

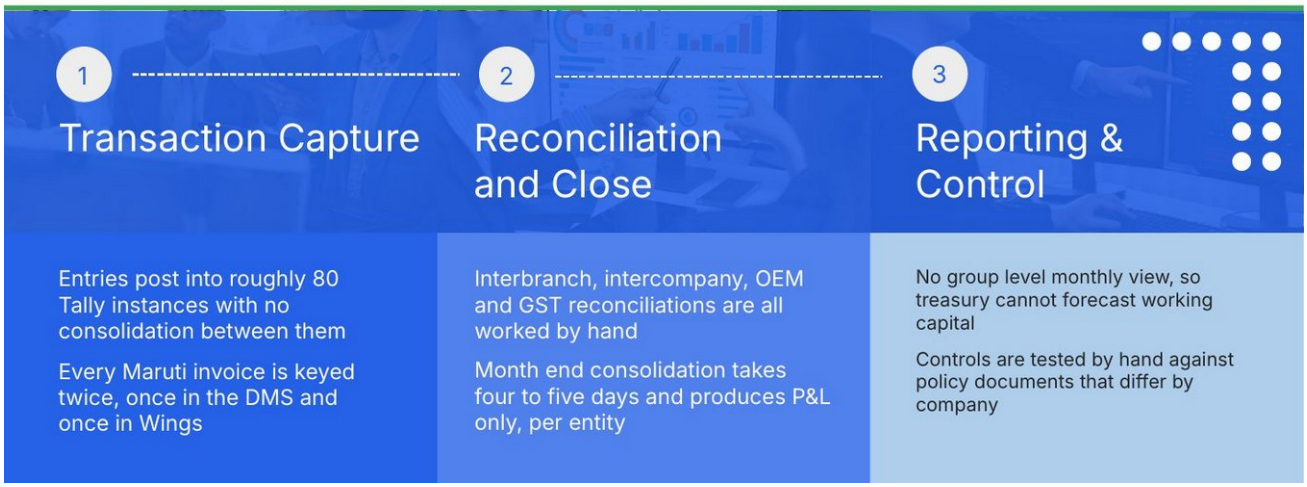

Reference deck slide 5: where it breaks

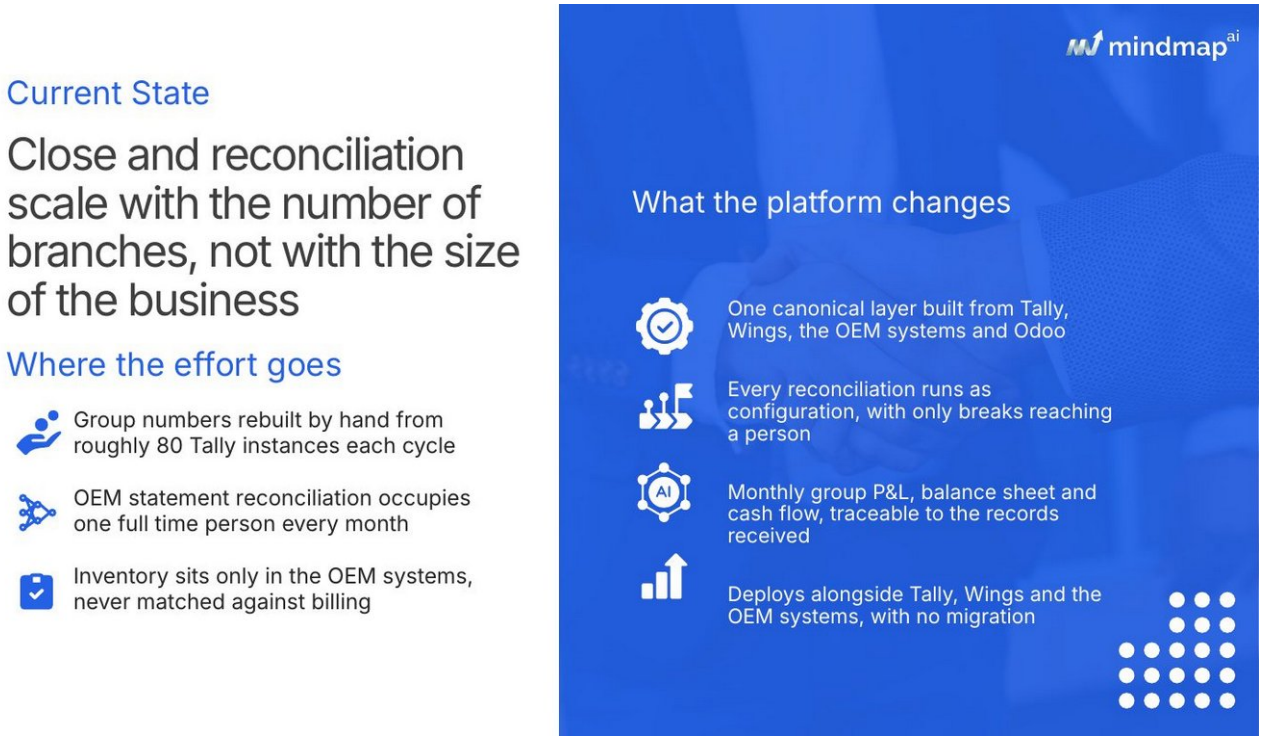


Reference deck slide 6: current state

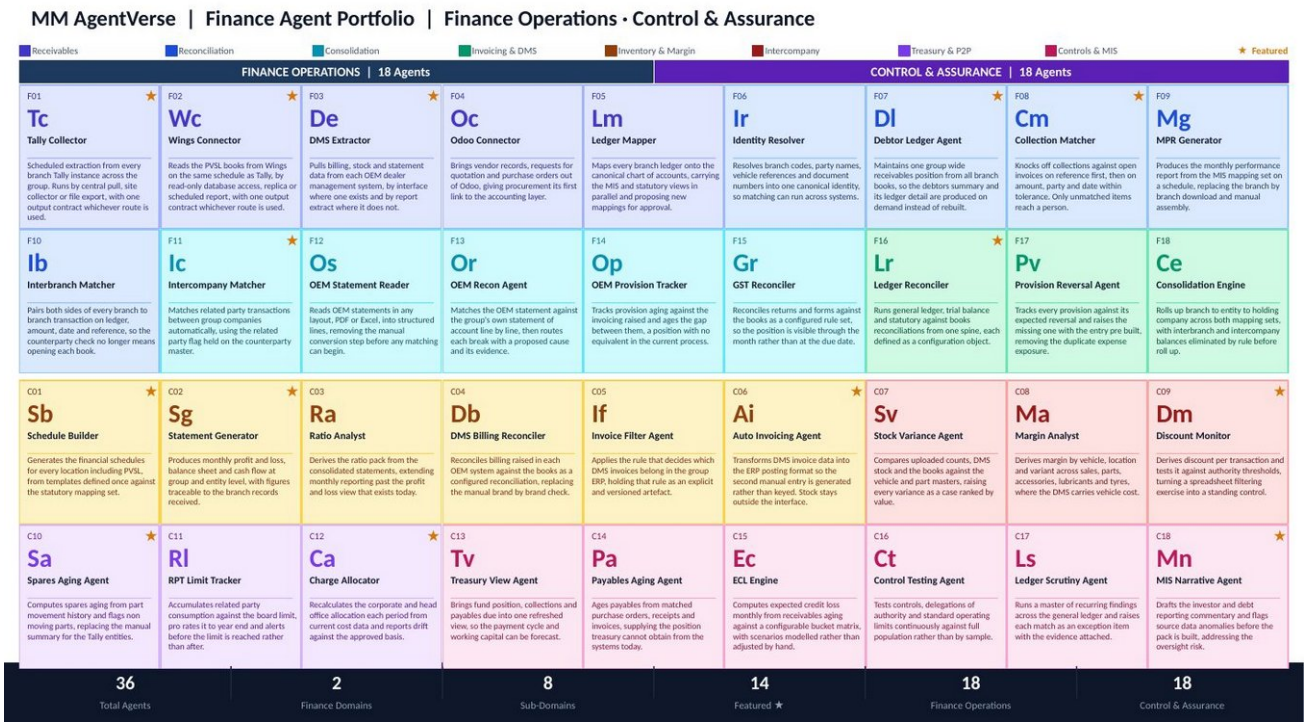

Reference deck slide 7: agent portfolio




Reference deck slide 8: full-visual slide (shown with the solution heat map)

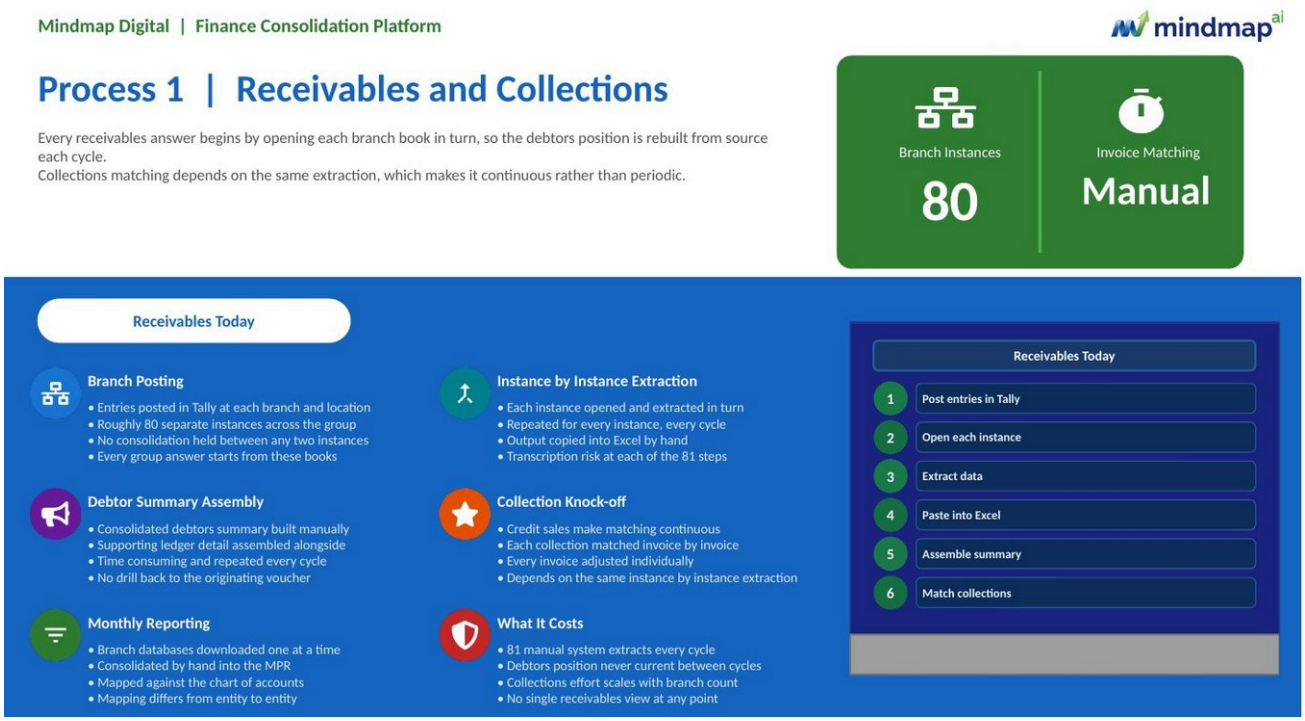

Reference deck slide 9: process summary today




Reference deck slide 10: current process swimlane

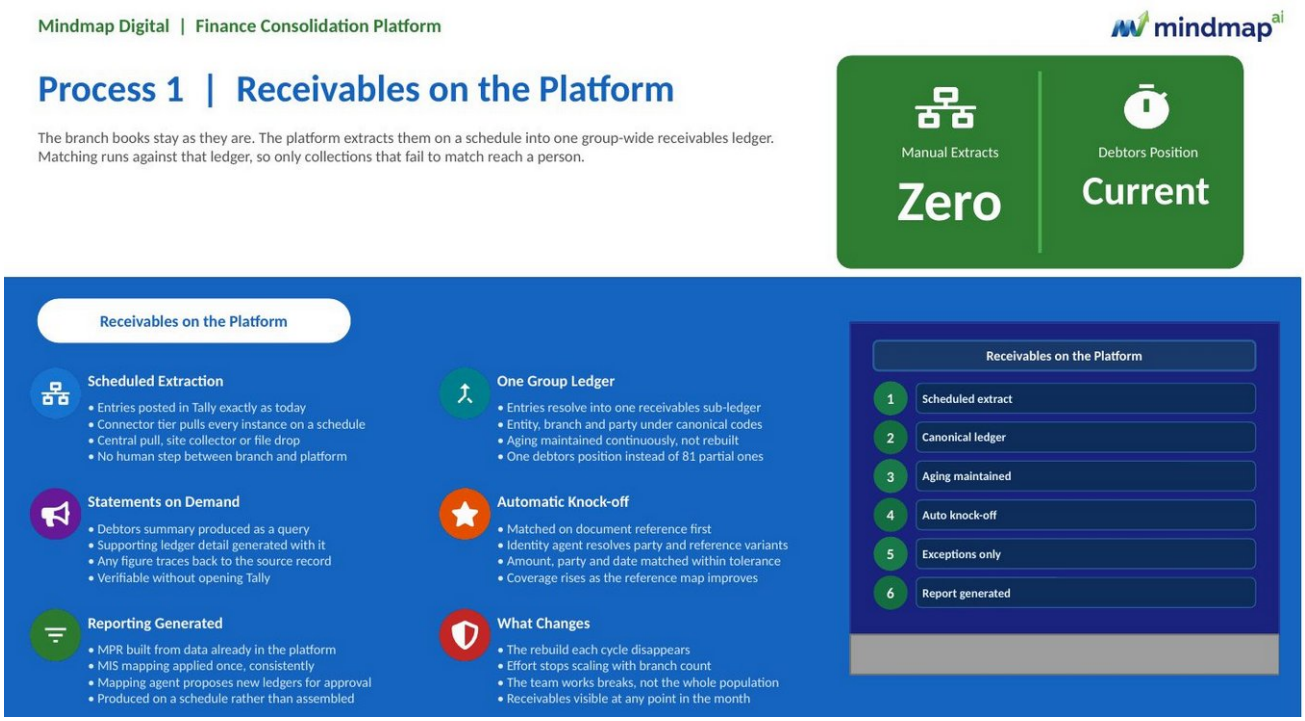

Reference deck slide 11: process summary on the platform



Reference deck slide 12: target process swimlane

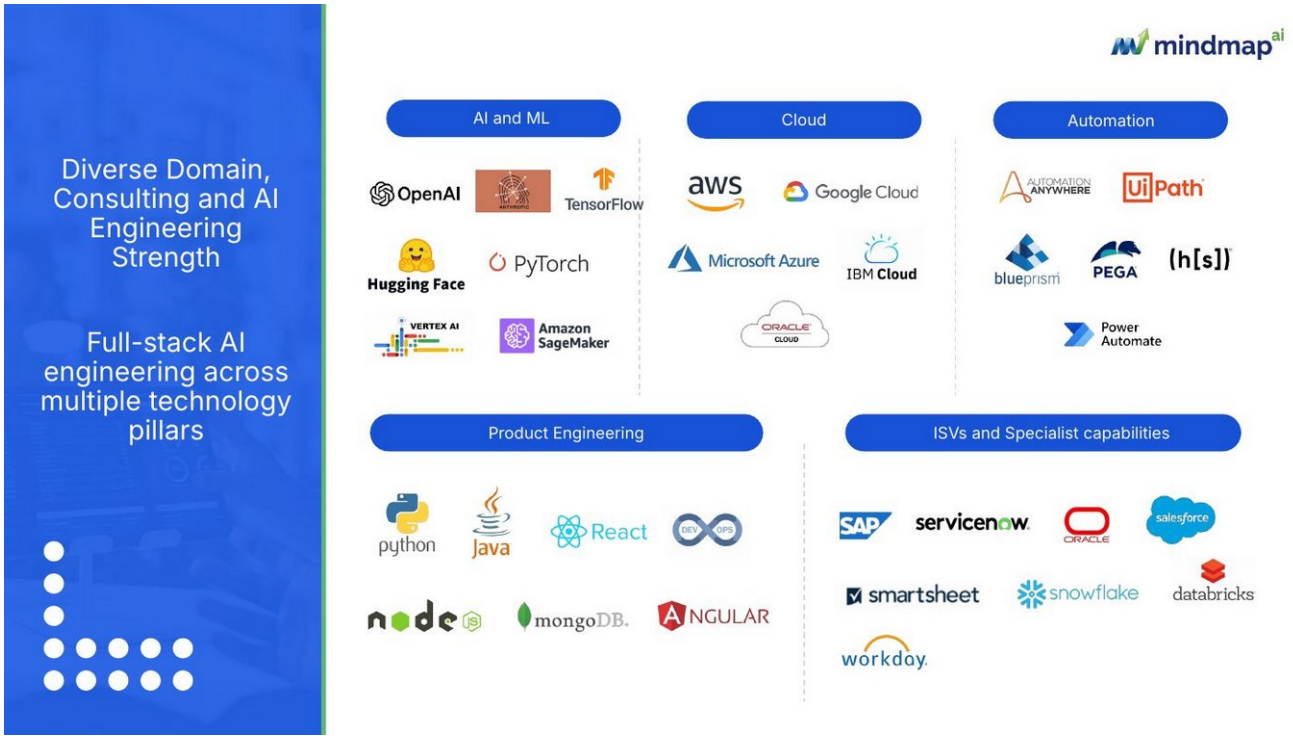

Reference deck slide 39: capabilities



Reference deck slide 40: closing